

**Ladders and steps**

**H  
Y  
M  
E  
R**

**MADE FOR  
PEOPLE WHO  
GET THINGS DONE.**

**Professional access technology for industry and trade.**



---

**There are other ladder makers. But we make a difference. Whether it's high up or low down – anyone who works hard every day needs more than just a good ladder.**

**Hard workers in industry and trade need absolute reliability, maximum safety and the highest level of comfort. And that's exactly what we make possible. We make highly functional, long-lasting access solutions that not only make working at heights easy, but also everything else – from ordering and usage through to customer support. We get straight to the point, think out of the box and deliver fast. Rooted in Wangen in the Allgäu, we have been making working at height easier, safer and more ergonomic for 60 years with top-quality access solutions made in Germany as well as first-class advice and excellent services.**

**MADE FOR  
PEOPLE WHO  
GET THINGS DONE.**

---

# TABLE OF CONTENTS



## LADDERS

### 010 Leaning and hookable ladders

- 013 Step leaning ladders
- 016 Telescopic leaning ladder
- 017 Rung leaning ladders
- 019 Hookable shelf ladder
- 020 Hookable extension ladders
- 022 Stairs

### 024 Extension and rope-operated extension ladders

- 027 Step extension ladders, two-section
- 028 Extension ladder, two-section
- 030 Rope-operated extension ladders, two-section
- 032 Rope-operated extension ladders, three-section

### 034 Freestanding ladders

- 037 Step ladders with platform, single-sided accessible
- 043 Step ladders, double-sided accessible
- 050 Rung ladders, double-sided accessible
- 052 Stairway ladder
- 053 Wooden step ladder, double-sided accessible
- 054 Wooden rung ladder, double-sided accessible

### 055 Multipurpose ladders

- 058 Telescopic ladders
- 060 Combination ladders, two-section
- 062 Combination ladders, three-section
- 065 Multipurpose ladder

### 066 Platform ladders and stockers' ladders

- 069 Platform ladders with handrail and wheels
- 074 HYMER ProTect platform ladders
- 077 Mobile stockers' ladders

### 079 Products for special applications

- 080 GRP Step ladder with platform, single-sided accessible
- 081 GRP Step ladder, double-sided accessible
- 082 GRP Rung ladder, double-sided accessible
- 083 GRP Rung leaning ladder
- 084 Roof ladders
- 085 Window cleaner's ladder
- 086 Orchard ladders
- 088 Fuelling ladder

### 089 Accessories and spare parts for ladders

- 090 Accessories
- 103 Spare parts



## STEPS AND WORKING PLATFORMS

### 119 Steps and working platforms

- 122 Aluminium step
- 123 Machine steps
- 125 Step stand
- 126 Industrial step
- 128 Servicing and assembly step
- 129 Safety steps
- 133 Aluminium planks
- 135 Assembly stand

### 136 Accessories and spare parts for steps and working platforms

- 137 Accessories
- 139 Spare parts

---

# LADDERS

- 10 Leaning and hookable ladders
- 24 Extension and rope-operated extension ladders
- 34 Freestanding ladders
- 55 Multipurpose ladders
- 66 Platform ladders and stockers' ladders
- 79 Products for special applications
- 89 Ladder accessories and spare parts

# 01

# AT A GLANCE

We know how important it is to find the right access technology that meets your needs. That is why we highlight the most important features of our products as you browse through our catalogue.

Look for the symbols on the right-hand side of each product page. You can then see the most important information at a glance.

EN  
131

EN  
131-4

EN  
131-7

NF P 93-  
352/353

DIN  
4567-1

DIN  
4567-4

EN  
14183

## **Focusing on safety and compliance: Ergonomic and standard-compliant HYMER access technology**

Our access technology products are always compliant with the applicable standards and regulations. Access technology products are regularly being used in industry and the craft trades for maintenance, servicing and repair work. To minimise the risk of fall accidents, care should be taken during procurement to only use products that are not only safe and stable, but also comply with ergonomic criteria and legal standards. The conformity and safety of our HYMER access technology is highlighted by corresponding buttons.



**R11**



**R13**

## **Anti-slip on ladders**

Steps on HYMER ladders comply with anti-slip property class R11. In oily or wet applications, ladders with anti-slip property class R13 are the right choice.



### **Maxim load**

Before using a ladder or step, it is essential to check the maximum permissible load. Each of our access technology products is labelled with a pictogram indicating the respective weight limit. This information is extremely important to avoid accidents and injuries.



### **Durability and quality combined: 10-year warranty on products**

HYMER products impress with their high-quality workmanship, robust design and particularly long service life. We stand by this promise by giving a ten-year warranty on design, materials and workmanship.



### **Development and production in Wangen im Allgäu – Made in Germany**


All HYMER access technology products are developed, designed and manufactured exclusively at our headquarters in Wangen in Germany's Allgäu region. Our development and production processes are certified in accordance with DIN EN ISO 9001–2008, which guarantee safety and maximum reliability. This means we can assure you of tested quality and emphasise our commitment to work safety, also for working at height.





# INFORMATION ON SELECTING LADDERS

## Selecting ladder size/length



Leaning ladders may only be climbed up to the fourth step/rung from the top to ensure sufficient hold.



Combination ladders in the 'step ladder with extension ladder' position may only be climbed up to the fifth step/rung from the top.



Double-sided accessible step ladders may only be climbed up to the third step/rung from the top in order to provide sufficient hold.




The size of step ladders with platforms and platform ladders must be selected so that the user can reach the maximum required working height having to stretch outwards from the platform.



The 'elbow method' helps to determine the correct inclination angle.

## Illustration of standing height, working height and reach height

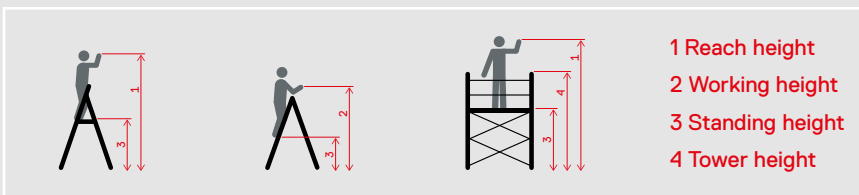

Simplified HYMER formula:  
This can vary depending on the ladder or tower. Please observe the information in the technical tables in this catalogue.

**Working height = standing height + 1.50 m**  
**Reach height = standing height + 2.00 m**

## Calculating ladder length

The table shows the required minimum lengths. It is generally recommended to use the next longest ladder length in the HYMER range.

vertical height (in m)	Required minimum ladder length (in m) at the following angle of inclination		
	75° rung ladders (still permitted) vertical height x factor 1.035	70° rung ladders (our recommendation) vertical height x factor 1.064	68° step ladders vertical height x factor 1.080
2.00	2.05	2.15	2.15
2.50	2.60	2.65	2.70
3.00	3.10	3.20	3.25
3.50	3.60	3.70	3.80
4.00	4.15	4.25	4.30
4.50	4.65	4.80	–
5.00	5.20	5.30	–
5.50	5.70	5.85	–
6.00	6.20	6.40	–
6.50	6.75	6.90	–
7.00	7.25	7.45	–

### Example for calculating minimum ladder length:

Vertical height  
(upper contact point)  
= 6.00 m

When using a rung ladder  
(70° inclination angle):  
6.00 m x 1.064  
= **6.40 m**

---

# LEANING AND HOOKABLE LADDERS

- 13 Step leaning ladders
- 16 Telescopic leaning ladder
- 17 Rung leaning ladders
- 19 Hookable shelf ladder
- 20 Hookable extension ladders
- 22 Stairs


# LEANING AND HOOKABLE LADDERS

Flexible to use, easy for working.


For use by craft trades and industry through to logistics: Our leaning and hook-on ladders impress with their robust workmanship, high functionality and flexibility for ergonomic, standard-compliant working. Optional accessories provide extra comfort and safety.




High robustness and high-quality workmanship.



Convenient, ergonomic ladder width.




Advanced functional details and accessories for greater comfort.

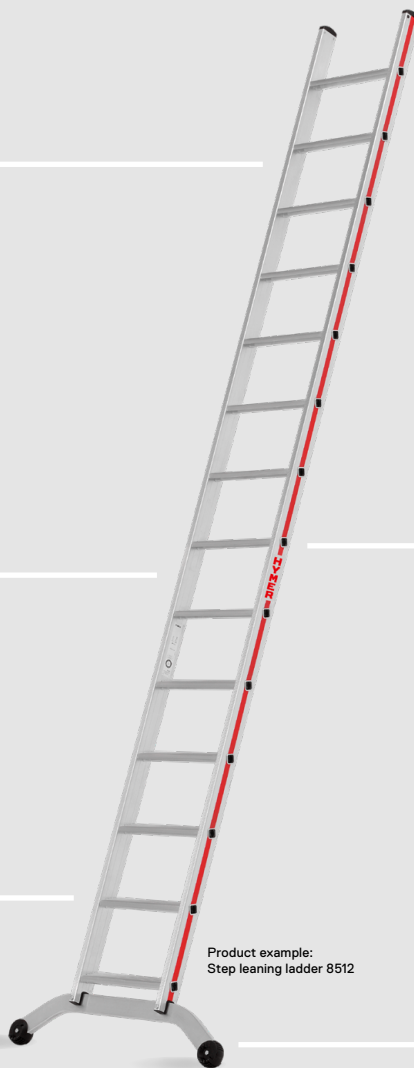

Product example:  
Step leaning ladder 8512




With 80 mm step depth for ergonomic working or with highly profiled rungs for a safe traffic route.



Over 3 metres ladder length with cross-beam for a safe stand.


# ACCESSORIES FOR LEANING AND HOOKABLE LADDERS

In our wide range of ladders, we not only offer leaning ladders and hook-on ladders, but also an extensive selection of accessories to improve ladder stability and workplace ergonomics. Our ladder accessories such as cross-beams, stabilisers and add-on steps for rung ladders help minimise the risk of falls and reduce ergonomic stress factors. Your safety and comfort are our top priority.



## Suspension hook set See page 95

- Order no. 0054013  
Hook size 30 mm
- Order no. 0054014  
Hook size 60 mm
- Order no. 0054015  
Hook size 100 mm




## Suspension set for ladders with mounted suspension hooks See page 95

- Order no. 0054835



## Add-on steps for rung ladders See page 90

- Order no. 0055318  
Set with 3 pieces
- Order no. 0055324  
1 piece



## Cross-beam for ladder section See page 93

- Order no. 0054062  
Length 800 mm
- Order no. 0054063  
Length 1,200 mm



Product example:  
Rung leaning ladder 6011



## Retrofit kit telescopic stabilisers for leaning, extension and rope-operated extension ladders See page 92



- Order no. 0055181

# STEP LEANING LADDER

- Ergonomic working on 80 mm step depth. Front step edges flush with stile.
- Very robust thanks to torsion-resistant, swaged stile-step connection.
- More ground clearance and stability thanks to the arched cross-beam.
- Convenient, ergonomic ladder width.

## Features:

- Ladder inner width 370 mm.

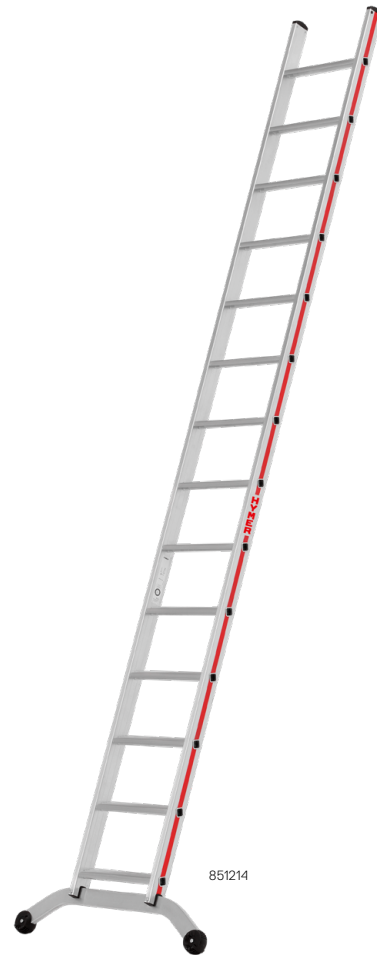

EN  
131



Max.  
150 kg



10  
YEAR  
GUARANTEE



Number of steps	6	8	10	12	14	16	18
Stile (approx. mm)	71	71	71	71	71	71	71
Length (approx. m)	1.72	2.22	2.72	3.22	3.72	4.22	4.72
Standing height (approx. m)	0.70	1.17	1.63	2.09	2.56	3.02	3.49
Reach height (approx. m)	2.70	3.17	3.63	4.09	4.56	5.02	5.49
Width top/bottom (approx. mm)	425/425	425/425	425/425	425/961	425/961	425/961	425/1,040
Weight (approx. kg)	4.5	5.7	6.9	9.2	10.0	11.8	12.8
Ladder bottom	A	A	A	B	B	B	B
Order no.	851206	851208	851210	851212	851214	851216	851218

## Recommended accessories:



Handrail  
Page 99

# STEP LEANING LADDER R13

- Work safety in the highest slip resistance class R13. Suitable for use in oily areas.
- Ergonomic working on 80 mm step depth. Front step edges flush with stile.
- Very robust thanks to torsion-resistant, swaged stile-step connection.
- More ground clearance and stability thanks to the arched cross-beam.
- Convenient, ergonomic ladder width.

## Features:

- R13 coating on the entire step surface.
- Ladder inner width 370 mm.



EN  
131



Max.  
150 kg



10  
YEAR  
GUARANTEE



Number of steps	8	10	12	14	16
Stile (approx. mm)	71	71	71	71	71
Length (approx. m)	2,22	2,72	3,22	3,72	4,22
Standing height (approx. m)	1,17	1,63	2,09	2,56	3,02
Reach height (approx. m)	3,17	3,63	4,09	4,56	5,02
Width top/bottom (approx. mm)	425/425	425/425	425/961	425/961	425/961
Weight (approx. kg)	5,8	7,2	9,7	10,7	12,1
Ladder bottom	A	A	B	B	B
Order no.	891208	891210	891212	891214	891216

## Recommended accessories:




Handrail  
Page 99

# STEP LEANING LADDER

- Ergonomic working on 80 mm step depth.  
Front step edges flush with stile.
- Higher torsional stability thanks to robust D-shaped stiles.
- Maximum stability thanks to 8-fold fully riveted steps.
- Extra-large ladder shoes for stability.
- Easy-to-clean, closed stile.

## Features:

- Ladder inner width 357 mm.



EN  
131



Max.  
150 kg



**10**  
YEAR  
GUARANTEE

★ ★ ★  
MADE IN  
GERMANY

Number of steps	5	6	7	8	9	10	11
Stile (approx. mm)	81	81	81	81	81	81	81
Length (approx. m)	1.50	1.75	2.00	2.25	2.50	2.75	3.00
Standing height (approx. m)	0.45	0.68	0.91	1.14	1.37	1.61	1.84
Reach height (approx. m)	2.45	2.68	2.91	3.14	3.37	3.61	3.84
Width top/bottom (approx. mm)	425	425	425	425	425	425	425
Weight (approx. kg)	3.4	4.0	4.7	5.2	5.9	6.3	6.9
Order no.	601205	601206	601207	601208	601209	601210	601211

## Recommended accessories:



Suspension  
hook set  
Page 95



Support  
board set  
Page 96

# TELESCOPIC LEANING LADDER

EN  
131Max.  
150 kg

- Ergonomic working on 80 mm step depth.
- Rubber pads at the upper end of the stile protect susceptible surfaces and reduce the risk of slipping.
- Highly stable thanks to foldable, transport-optimised stabilisers.
- Central unlocking with just one grip.
- Requires little space to transport and store.
- Smooth, safe extension and retraction.
- Convenient, ergonomic ladder width.
- Anodised stiles prevent dirty hands from aluminium abrasion.

## Features:

- **Legal warranty.**



Number of steps	11	13
Length retracted (approx. m)	0.87	0.93
Length extended (approx. m)	3.49	4.09
Standing height (approx. m)	2.49	3.09
Reach height (approx. m)	4.49	5.09
Width top/bottom (approx. mm)	440/550	440/560
Weight (approx. kg)	15.2	17.4
Order no.	801411	801413

## Recommended accessories:



Safety feet,  
height adjustable  
Page 91



# RUNG LEANING LADDER

- Compact and lightweight design.
- Non-slip, ribbed, rolled profile rungs.

## Features:

- Ladder inner width 300 mm.


EN  
131

Max.  
150 kg



10  
YEAR  
GUARANTEE

★ ★ ★  
MADE IN  
GERMANY

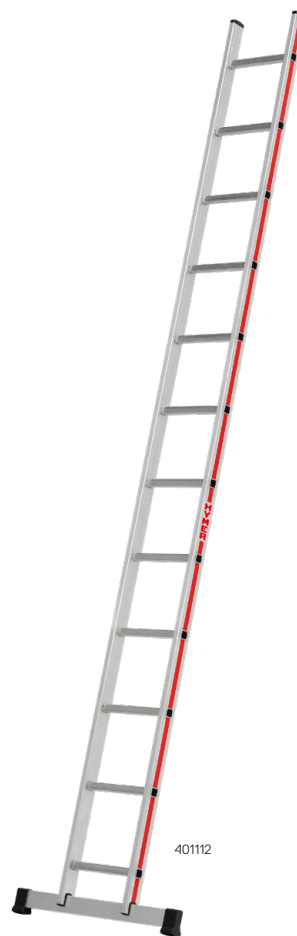

Number of rungs	6	8	10	12	14	16	18
Stile (approx. mm)	60	60	60	60	60	66	66
Length (approx. m)	1.78	2.34	2.90	3.47	4.03	4.59	5.15
Standing height (approx. m)	0.75	1.29	1.83	2.37	2.91	3.45	3.99
Reach height (approx. m)	2.75	3.29	3.83	4.37	4.91	5.45	5.99
Width top/bottom (approx. mm)	355/355	355/355	355/355	355/697	355/810	355/810	355/921
Weight (approx. kg)	2.9	3.7	4.6	6.4	7.3	8.6	9.6
Ladder bottom	A	A	A	B	B	B	B
Order no.	401106	401108	401110	401112	401114	401116	401118

## Recommended accessories:




Add-on steps  
for rung ladders  
Page 90



Cross-beam  
for ladder section  
Page 93



Suspension  
hook set  
Page 95



Suspension set  
Page 95



Retrofit kit  
telescopic  
stabilisers  
Page 92



Handrail  
Page 99

# RUNG LEANING LADDER

- Convenient, ergonomic ladder width.
- Very robust thanks to torsion-resistant, swaged stile-step connection.
- Increased slip resistance of the rungs thanks to a high rib extruded profile.

**Features:**

- Ladder inner width 370 mm.

EN  
131

Max.  
150 kg  
↓

**10**  
YEAR  
GUARANTEE

★ ★ ★  
MADE IN  
GERMANY



Number of rungs	6	7	8	9	10	12	14	16	18	20	22
Stile (approx. mm)	60	60	60	60	60	60	60	66	71	71	71
Length (approx. m)	1.88	2.16	2.44	2.72	3.00	3.56	4.12	4.68	5.24	5.80	6.36
Standing height (approx. m)	0.82	1.09	1.36	1.63	1.90	2.44	2.98	3.52	4.06	4.60	5.14
Reach height (approx. m)	2.82	3.09	3.36	3.63	3.90	4.44	4.98	5.52	6.06	6.60	7.14
Width top/bottom (approx. mm)	425/425	425/425	425/425	425/425	425/425	425/962	425/962	425/1,041	425/1,041	425/1,142	425/1,142
Weight (approx. kg)	3.3	3.8	4.2	4.6	5.2	7.3	8.3	9.7	11.2	12.5	13.6
Ladder bottom	A	A	A	A	A	B	B	B	B	B	B
Order no.	601106	601107	601108	601109	601110	601112	601114	601116	601118	601120	601122

**Recommended accessories:**




Add-on steps for rung ladders  
Page 90



Cross-beam for ladder section  
Page 93



Suspension hook set  
Page 95



Suspension set  
Page 95



Retrofit kit telescopic stabilisers  
Page 92




Handrail  
Page 99

# HOOKABLE SHELF LADDER

- Ergonomic working on 80 mm step depth.  
Front step edges flush with stile.
- Very robust thanks to torsion-resistant, swaged stile-step connection.
- Sturdy suspension hook for on-site attachment.

## Features:

- Ladder inner width 370 mm.
- Screwed-in ladder feet.
- Hook size 30 mm.



<b>Number of steps</b>	<b>12</b>	<b>14</b>	<b>16</b>	<b>18</b>
<b>Stile</b> (approx. mm)	71	71	71	71
<b>Length</b> (approx. m)	3.27	3.73	4.19	4.66
<b>Standing height</b> (approx. m)	2.08	2.54	3.00	3.47
<b>Reach height</b> (approx. m)	4.08	4.54	5.00	5.47
<b>Vertical height to hook-in point</b> (approx. m)	3.00	3.46	3.92	4.39
<b>Vertical height up to top step</b> (approx. m)	2.77	3.24	3.70	4.16
<b>Width</b> (approx. mm)	425	425	425	425
<b>Weight</b> (approx. kg)	8.3	9.4	10.6	11.8
<b>Order no.</b>	<b>861212</b>	<b>861214</b>	<b>861216</b>	<b>861218</b>

Note: This ladder is not a leaning ladder as stipulated by EN 131-1 and may only be used when hooked in place.

## Recommended accessories:



Handrail  
Page 99

# HOOKABLE EXTENSION LADDER

- Non-slip, ribbed, rolled profile rungs.
- Robust guide fittings made of steel.
- Secure attachment of the ladder thanks to preassembled, stable suspension hooks.
- Space-saving storage when retracted.
- The variable angle of inclination allows some height compensation.

## Features:

- **Press-fitted ladder feet.**
- **Ladder inner width 300 mm (top section).**
- **Angle of inclination between 65° and 75°.**
- **Hook size 30 mm.**

Max.  
150 kg



**10**  
YEAR  
GUARANTEE

★ ★ ★  
MADE IN  
GERMANY



Number of rungs	2×7	2×8	2×10
Stile top/bottom (approx. mm)	60/60	60/60	66/66
Number of rungs at max. extension	12	14	17
Length retracted (approx. m)	2.14	2.42	2.98
Length extended (approx. m)	3.54	4.10	4.94
Standing height (approx. m)	1.00 – 2.35	1.27 – 2.89	1.81 – 3.70
Reach height (approx. m)	3.00 – 4.35	3.27 – 4.89	3.81 – 5.70
Vertical height up to leaning point (approx. m)	2.04 – 3.38	2.31 – 3.92	3.12 – 4.73
Width extended top/bottom (approx. mm)	355/424	355/424	355/424
Weight (approx. kg)	7.8	8.2	10.8
Order no.	494614	494616	494620

Note: This ladder is not a leaning ladder as stipulated by EN 131-1 and may only be used when hooked in place.

## Recommended accessories:



Suspension set  
Page 95

# HOOKABLE EXTENSION LADDER

- Very robust thanks to torsion-resistant, swaged stile-step connection.
- Sturdy suspension hook for on-site attachment.
- Infinitely extendable handrails with quick lock.
- Safer traffic route thanks to comfort rung.

## Features:


- Comfortable 500 mm ladder inner width.
- Comfortable 45 mm rung depth.
- Hook size 60 mm.

Max.  
150 kg



**10**  
YEAR  
GUARANTEE

★ ★ ★  
MADE IN  
GERMANY



609215

	2×8	2×9	11+12
Number of rungs	2×8	2×9	11+12
Stile top/bottom (approx. mm)	60/60	60/60	60/60
Number of rungs at max. extension	13	15	20
Length retracted (approx. m)	2.23	2.47	3.22
Length extended (approx. m)	3.22	3.72	4.97
Standing height (approx. m)	2.02 – 2.95	2.25 – 3.35	2.72 – 4.57
Reach height (approx. m)	4.02 – 4.95	4.25 – 5.35	4.72 – 6.57
Vertical height up to leaning point (approx. m)	2.03 – 2.96	2.26 – 3.35	2.72 – 4.58
Width (approx. mm)	550	550	550
Total width incl. handrail (approx. mm)	662	662	662
Weight (approx. kg)	18.2	20.0	25.6
Order no.	609204	609215	609205

Note: This ladder is not a leaning ladder as stipulated by EN 131-1 and may only be used when hooked in place.

## Recommended accessories:




Suspension set  
Page 95

# STAIRS

- Very robust thanks to torsion-resistant, swaged stile-step connection.
- Sturdy suspension hook for on-site attachment.
- Ergonomically shaped handrails on both sides.
- Ergonomic working on 80 mm step depth. Front step edges flush with stile.
- Convenient, ergonomic ladder width.

## Features:


- **Comfortable 450 mm ladder inner width.**
- **Step angle 68°.**
- **Hook size 30 mm.**
- **Shipped in subassemblies pre-assembled in the factory.**



Number of steps	5	6	7	8	9	10	11	12	13	14	15
Ladderlength (approx. m)	1.27	1.52	1.77	2.02	2.27	2.52	2.77	3.02	3.27	3.52	3.77
Standing height (approx. m)	1.14	1.37	1.61	1.84	2.07	2.30	2.53	2.76	3.00	3.23	3.46
Reach height (approx. m)	3.14	3.37	3.61	3.84	4.07	4.30	4.53	4.76	5.00	5.23	5.46
Overhang (approx. m)	0.55	0.64	0.74	0.83	0.92	1.02	1.11	1.21	1.30	1.39	1.49
Weight (approx. kg)	7.5	8.5	9.5	10.5	11.5	12.5	13.5	14.5	15.5	16.5	17.5
Order no.	805805	805806	805807	805808	805809	805810	805811	805812	805813	805814	805815

Note: This ladder is not a leaning ladder as stipulated by EN 131-1 and may only be used when hooked in place.

## Recommended accessories:




Suspension set  
Page 95

# STAIRS WITH PLATFORM

- Very robust thanks to torsion-resistant, swaged stile-step connection.
- Sturdy suspension hook for on-site attachment.
- Ergonomically shaped handrails on both sides.
- Ergonomic working on 80 mm step depth. Front step edges flush with stile.
- Convenient, ergonomic ladder width.
- Wide platform for convenient, safe exit.

## Features:


- **Comfortable 450 mm ladder inner width.**
- **Step angle 68°.**
- **Platform depth 450 mm.**
- **Hook size 35 mm.**
- **Shipped in subassemblies pre-assembled in the factory.**



Number of steps incl. platform	5	6	7	8	9	10	11	12	13	14	15
Ladderlength (approx. m)	1.20	1.45	1.70	1.95	2.20	2.45	2.70	2.95	3.20	3.45	3.70
Standing height (approx. m)	1.15	1.38	1.61	1.85	2.08	2.31	2.54	2.77	3.00	3.24	3.47
Reach height (approx. m)	3.15	3.38	3.61	3.85	4.08	4.31	4.54	4.77	5.00	5.24	5.47
Overhang (approx. m)	0.92	1.01	1.11	1.20	1.29	1.39	1.48	1.57	1.67	1.76	1.86
Weight (approx. kg)	12.0	13.3	14.5	15.8	17.0	18.3	19.5	20.8	22.0	23.3	24.5
Order no.	806005	806006	806007	806008	806009	806010	806011	806012	806013	806014	806015

Note: This ladder is not a leaning ladder as stipulated by EN 131-1 and may only be used when hooked in place.

## Recommended accessories:



Suspension set  
Page 95

---

# EXTENSION AND ROPE-OPERATED EXTENSION LADDERS

- 27 Step extension ladder, two-section
- 28 Extension ladders, two-section
- 30 Rope-operated extension ladders, two-section
- 32 Rope-operated extension ladders, three-section



# EXTENSION AND ROPE-OPERATED EXTENSION LADDERS

Simple and safe at inaccessible heights.


Comfort is redefined with our highly functional extension and rope-operated extension ladders. Thanks to robust, well thought-out details and optional accessories, we not only simplify getting up to heights, but also make it easier and safer to work there.




Smooth extension via wall rollers.



Convenient, ergonomic ladder inner widths.



Advanced functional details and accessories for greater comfort.

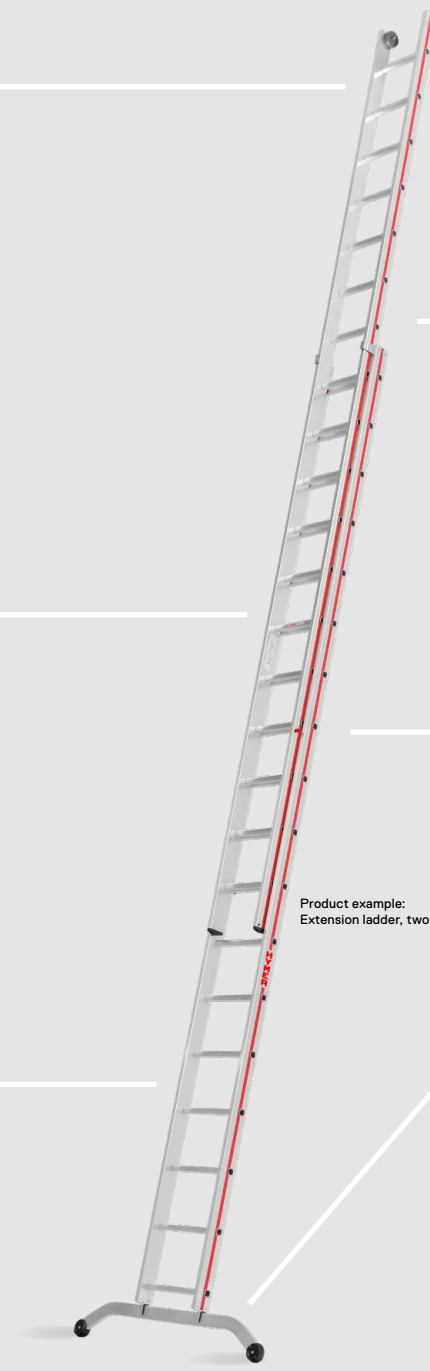

Product example:  
Extension ladder, two-section 6046



Easier extension and retraction of the ladder thanks to robust steel guide fittings with plastic sliders.




Non-slip profiled rungs.



Increased stability.


# ACCESSORIES FOR EXTENSION AND ROPE-OPERATED EXTENSION LADDERS

In our extensive ladder range, you will find not only extension and rope-operated extension ladders, but also a wide range of accessories specially developed to optimise ladder stability and improve workplace ergonomics. Our ladder accessories such as foot pike sets, ladder holder sets for gutters and wall spacers, help minimise the risk of falls and reduce ergonomic stress factors. Your safety and comfort are our top priority.



**Wall spacer for rung ladders**  
See page 96

- Order no. 0051248  
Telescopic and with tool tray
- Order no. 005485  
Fixed wall distance



**Ladder holder set for gutters**  
See page 96

- Order no. 0051528



**Add-on steps for rung ladders**  
See page 90

- Order no. 0055318  
Set with 3 pieces
- Order no. 0055324  
1 piece



**Ladder bracket set for roof racks**  
See page 100

- Order no. 0055008



**Set of foot pikes for cross-beams**  
See page 90 + 91

- Order no. 0050538  
For straight cross-beams
- Order no. 0053761  
For curved cross-beams



Product example:  
Extension ladder, two-section 4046

# STEP EXTENSION LADDER, TWO-SECTION

- Ergonomic working on 80 mm step depth on the upper section. Front step edges flush with stile.
- Lower weight due to the combination of steps and rungs.
- Increased slip resistance of steps and rungs thanks to a high rib extruded profile.
- Easier extension and retraction of the ladder thanks to steel guide fittings with plastic sliders.

## Features:

- Ladder inner width 300 mm (top section).
- Solid steel fittings.
- Press-fitted ladder feet.

EN  
131Max.  
150 kg10  
YEAR  
GUARANTEE

Number of rungs/steps	2×8	2×10	2×12	2×14
Stile top/bottom (approx. mm)	83/66	83/66	83/71	83/83
Number of rungs/steps at max. extension	14	17	21	25
Length retracted (approx. m)	2.33	2.89	3.45	4.01
Length extended (approx. m)	4.01	4.85	5.97	7.09
Standing height (approx. m)	2.78	3.56	4.60	5.64
Reach height (approx. m)	4.78	5.56	6.60	7.64
Width extended top/bottom (approx. mm)	355/750	355/948	355/948	355/1,200
Weight (approx. kg)	11.2	13.7	16.7	19.3
Order no.	484616	484620	484624	484628

## Recommended accessories:



Set of foot pikes  
for straight  
cross-beams  
Page 90



Ladder holder  
set for gutters  
Page 96



Curved  
cross-beam  
Page 93



Set of foot pikes  
for curved  
cross-beams  
Page 91

# EXTENSION LADDER, TWO-SECTION

- Non-slip, ribbed, rolled profile rungs.
- Robust guide fittings made of steel.

## Features:

- Ladder inner width 300 mm (top section).

EN  
131

Max.  
150 kg

**10**  
YEAR  
GUARANTEE

★ ★ ★  
MADE IN  
GERMANY



	2×10	2×12	2×14	2×16
Number of rungs	2×10	2×12	2×14	2×16
Stile top/bottom (approx. mm)	66/66	71/71	83/83	83/83
Number of rungs at max. extension	17	21	25	29
Length retracted (approx. m)	2.91	3.47	4.02	4.59
Length extended (approx. m)	4.87	5.99	7.10	8.22
Standing height (approx. m)	3.74	4.82	5.90	6.98
Reach height (approx. m)	5.74	6.82	7.90	8.98
Width extended top/bottom (approx. mm)	355/950	355/950	355/1,200	355/1,200
Weight (approx. kg)	11.5	14.5	17.5	21.7
Order no.	404620	404624	404628	404632

## Recommended accessories:



Add-on steps  
for rung ladders  
Page 90



Set of foot pikes  
for cross-beams  
Page 90



Wall spacer  
for rung ladders  
Page 96



Ladder holder  
set for gutters  
Page 96




Ladder bracket  
set for roof racks  
Page 100

# EXTENSION LADDER, TWO-SECTION

- Very robust thanks to torsion-resistant, swaged stile-step connection.
- Increased slip resistance of the rungs thanks to a high rib extruded profile.
- Easier extension and retraction of the ladder thanks to steel guide fittings with plastic sliders.
- Convenient extension of the ladder using wall rollers.

## Features:

- Ladder inner width 300 mm (top section).

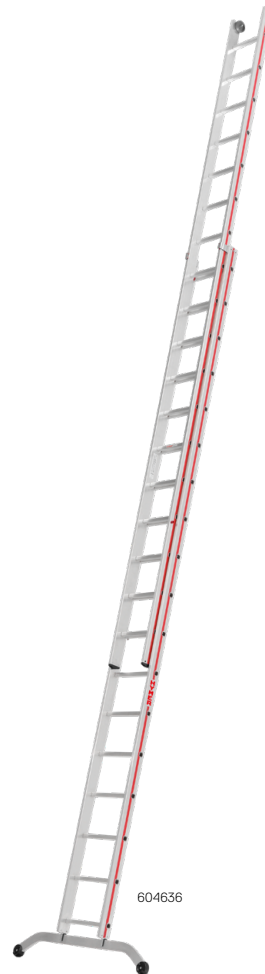EN  
131Max.  
150 kg10  
YEAR  
GUARANTEE★ ★ ★  
MADE IN  
GERMANY

Number of rungs	2×6	2×8	2×10	2×12	2×14	2×16	2×18
Stile top/bottom (approx. mm)	60/60	60/60	66/66	71/71	83/83	89/89	89/89
Number of rungs at max. extension	10	14	17	21	25	29	32
Length retracted (approx. m)	1.85	2.43	2.99	3.55	4.16	4.72	5.28
Length extended (approx. m)	2.97	4.11	4.95	6.07	7.24	8.36	9.15
Standing height (approx. m)	1.92	3.00	3.81	4.89	5.97	7.05	7.86
Reach height (approx. m)	3.92	5.00	5.81	6.89	7.97	9.05	9.86
Width extended top/bottom (approx. mm)	355/440	355/880	355/880	355/955	355/1,075	355/1,200	355/1,200
Weight (approx. kg)	7.3	9.9	12.0	15.2	18.5	23.2	28.6
Ladder bottom	A	B	B	B	B	B	B
Wall rollers	-	-	-	-	✓	✓	✓
Order no.	604612	604616	604620	604624	604628	604632	604636

## Recommended accessories:



Add-on steps  
for rung ladders  
Page 90




Set of foot pikes  
for cross-beams  
Page 91



Wall spacer  
for rung ladders  
Page 96



Ladder holder  
set for gutters  
Page 96



Ladder bracket  
set for roof racks  
Page 100



Retrofit kit  
telescopic  
stabilisers  
Page 92

# ROPE-OPERATED EXTENSION LADDER, TWO-SECTION

- Non-slip, ribbed, rolled profile rungs.
- Robust guide fittings made of steel.
- Durable, tear-resistant rope for safe height adjustment.
- Convenient extension of the ladder using wall rollers.

## Features:


- Ladder inner width 300 mm (top section).

EN  
131

Max.  
150 kg

10  
YEAR  
GUARANTEE

★ ★ ★  
MADE IN  
GERMANY

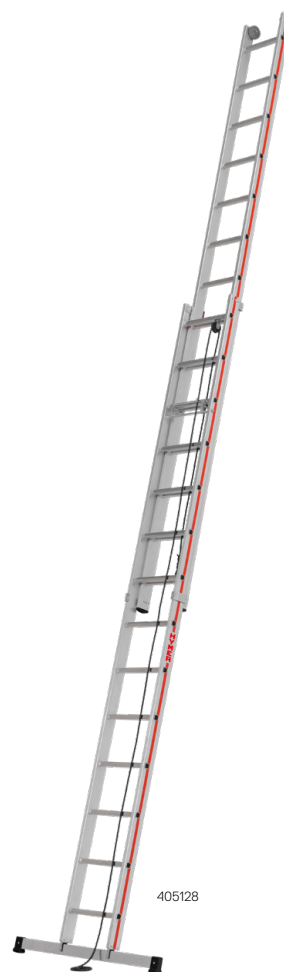

	2×14	2×16	2×18	2×20
Number of rungs	2×14	2×16	2×18	2×20
Stile top/bottom (approx. mm)	83/83	89/89	89/89	89/89
Number of rungs at max. extension	24	28	31	35
Length retracted (approx. m)	4.11	4.67	5.23	5.79
Length extended (approx. m)	6.90	8.02	8.86	9.98
Standing height (approx. m)	5.70	6.78	7.59	8.68
Reach height (approx. m)	7.70	8.78	9.59	10.68
Width extended top/bottom (approx. mm)	355/1,200	355/1,200	355/1,200	355/1,200
Weight (approx. kg)	18.8	23.5	26.5	30.4
Order no.	405128	405132	405136	405140

## Recommended accessories:



Set of foot pikes  
for cross-beams  
Page 90



Wall spacer  
for rung ladders  
Page 96



Ladder holder  
set for gutters  
Page 96




Ladder bracket  
set for roof racks  
Page 100

# ROPE-OPERATED EXTENSION LADDER, TWO-SECTION

- Highly stable thanks to foldable, transport-optimised telescopic stabilisers.
- Increased slip resistance of the rungs thanks to a high rib extruded profile.
- Easier extension and retraction of the ladder thanks to steel guide fittings with plastic sliders.
- Durable, tear-resistant rope for safe height adjustment.
- High stability thanks to folding feet with large bearing surface.
- Convenient extension of the ladder using wall rollers.

## Features:

- Ladder inner width 300 mm (top section).

EN  
131Max.  
150 kg  
↓10  
YEAR  
GUARANTEE★ ★ ★  
MADE IN  
GERMANY

605128

	2×14	2×16	2×18	2×20	2×22
Stile top/bottom (approx. mm)	89/89	89/89	89/89	100/100	100/100
Number of rungs at max. extension	25	29	32	36	40
Length retracted (approx. m)	4.18	4.74	5.30	5.86	6.42
Length extended (approx. m)	7.26	8.38	9.22	10.34	11.46
Standing height (approx. m)	6.19	7.29	8.12	9.22	10.32
Reach height (approx. m)	8.19	9.29	10.12	11.22	12.32
Width extended top/bottom (approx. mm)	355/1,400	355/1,400	355/1,400	355/1,400	355/1,400
Weight (approx. kg)	25.1	27.4	31.2	36.8	41.6
Order no.	605128	605132	605136	605140	605144

## Recommended accessories:



Set of foot pikes  
for stiles  
Page 90



Wall spacer  
for rung ladders  
Page 96



Ladder holder  
set for gutters  
Page 96



Ladder bracket  
set for roof racks  
Page 100

# ROPE-OPERATED EXTENSION LADDER, THREE-SECTION

- Non-slip, ribbed, rolled profile rungs.
- Robust guide fittings made of steel.
- Durable, tear-resistant ropes for safe height adjustment.
- Convenient extension of the ladder using wall rollers.

## Features:



- **Ladder inner width 300 mm (top section).**

EN  
131

Max.  
150 kg

**10**  
YEAR  
GUARANTEE

★ ★ ★  
MADE IN  
GERMANY



	3×12	3×14	3×16
<b>Number of rungs</b>	3×12	3×14	3×16
<b>Stile</b> top/middle/bottom (approx. mm)	83/89/83	89/89/89	89/100/89
<b>Number of rungs</b> at max. extension	29	34	39
<b>Length</b> retracted (approx. m)	3.57	4.13	4.70
<b>Length</b> extended (approx. m)	8.34	9.74	11.14
<b>Standing height</b> (approx. m)	6.57	7.84	9.10
<b>Reach height</b> (approx. m)	8.57	9.84	11.10
<b>Width</b> extended top/middle/bottom (approx. mm)	355/425/1,200	355/425/1,200	355/425/1,200
<b>Weight</b> (approx. kg)	29.5	34.4	41.9
<b>Order no.</b>	406136	406142	406148

Note: Middle section must be extended by at least two rungs before the ladder is fully extended.

## Recommended accessories:




Set of foot pikes  
for cross-beams  
Page 90



Wall spacer  
for rung ladders  
Page 96



Ladder holder  
set for gutters  
Page 96



Ladder bracket  
set for roof racks  
Page 100




# ROPE-OPERATED EXTENSION LADDER, THREE-SECTION

- Highly stable thanks to foldable, transport-optimised telescopic stabilisers.
- Increased slip resistance of the rungs thanks to a high rib extruded profile.
- Easier extension and retraction of the ladder thanks to steel guide fittings with plastic sliders.
- Durable, tear-resistant ropes for safe height adjustment.
- High stability thanks to folding feet with large bearing surface.
- Convenient extension of the ladder using wall rollers.

## Features:

- Ladder inner width 300 mm (top section).



EN  
131

Max.  
150 kg

10  
YEAR  
GUARANTEE

★ ★ ★  
MADE IN  
GERMANY

	3×14	3×16	3×18
Number of rungs	3×14	3×16	3×18
Stile top/middle/bottom (approx. mm)	89/89/89	100/100/100	100/100/100
Number of rungs at max. extension	34	40	43
Length retracted (approx. m)	4.18	4.75	5.30
Length extended (approx. m)	9.80	11.46	12.30
Standing height (approx. m)	8.43	10.06	10.84
Reach height (approx. m)	10.43	12.06	12.84
Width extended top/middle/bottom (approx. mm)	355/425/1,470	355/425/1,470	355/425/1,470
Weight (approx. kg)	37.1	45.1	51.7
Order no.	626142	626148	626154

Note: Middle section must be extended by at least two rungs before the ladder is fully extended.

## Recommended accessories:



Set of foot pikes  
for stiles  
Page 90



Wall spacer  
for rung ladders  
Page 96



Ladder holder  
set for gutters  
Page 96



Ladder bracket  
set for roof racks  
Page 100

---

# FREESTANDING LADDERS

37 Step ladders with platform, single-sided accessible

43 Step ladders, double-sided accessible

50 Rung ladders, double-sided accessible

52 Stairway ladder

53 Wooden step ladder, double-sided accessible

54 Wooden rung ladder, double-sided accessible

# FREESTANDING LADDERS

## Safe standing and ergonomic working.


Our sturdy step ladders – with 80 mm steps or strongly profiled rungs, single- or double-sided access – always offer a stable stand and secure foothold for ergonomic working as well as space-saving transport and storage options.



Models with platforms for safe, comfortable work.



Convenient folding mechanism thanks to sturdy hinges.



With 80 mm step depth for ergonomic work, or profiled rungs for non-slip foothold.



Reliable spreader lock using high-strength perlon belt or rigid strut.



Product example:  
Step ladder, double-sided accessible 8024



Robust workmanship and long-lasting material strength.



Optional accessories for even more comfort and safety.

# ACCESSORIES FOR FREESTANDING LADDERS

Our extensive range of freestanding ladders, provides not only different sizes and types, but also a wide range of accessories designed to maximise work safety and optimise workplace ergonomics. Our ladder accessories such as bucket hooks, tool bags, and comfortable hang-on and add-on steps help minimise the risk of falls and maximise the ease of working at height. Your safety and comfort are always top priority.




**Tool bag for aluminium and wooden ladders**  
See page 100

- Order no. 0054030



**Bucket hook for rung ladders**  
See page 100

- Order no. 0054008



**Hang-on step for rung ladders**  
See page 90

- Order no. 0050378  
260x250 mm, foldable
- Order no. 005411  
300x255 mm




**Add-on steps for rung ladders**  
See page 90

- Order no. 0055318  
Set with 3 pieces
- Order no. 0055324  
1 piece



**Foot extension set for rung ladders, double-sided accessible**  
See page 92

- Order no. 0053229  
Length 740 mm
- Order no. 0050376  
Length 1,000 mm

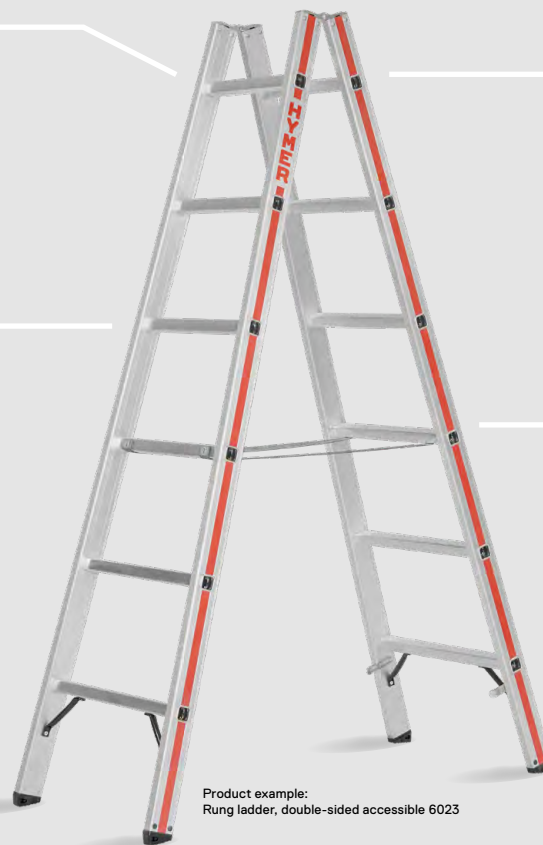

Product example:  
Rung ladder, double-sided accessible 6023

# STEP LADDER WITH PLATFORM, SINGLE-SIDED ACCESSIBLE

- Ergonomic working on 80 mm step depth. Front step edges flush with stile.
- Comfortable and safe standing for longer periods of work thanks to the large platform.
- Solid aluminium tool tray with bucket hook.
- High-strength perlon straps provide reliable safety strut.

## Features:

- **Screwed-in ladder feet.**
- **Platform dimensions 250 x 250 mm.**

EN  
131Max.  
150 kg10  
YEAR  
GUARANTEE

802606

Number of steps incl. platform	4	5	6	7	8	10	12	14
Stile (approx. mm)	71	71	71	71	71	71	71	71
Length (approx. m)	1.70	1.95	2.20	2.45	2.70	3.20	3.70	4.20
Standing height (height to platform) (approx. m)	0.93	1.16	1.40	1.63	1.85	2.32	2.78	3.25
Reach height (approx. m)	2.93	3.16	3.40	3.63	3.85	4.32	4.78	5.25
Vertical height (approx. m)	1.55	1.78	2.01	2.25	2.48	2.94	3.40	3.87
Width top/bottom (approx. mm)	305/480	305/500	305/530	305/550	305/570	305/630	305/680	305/740
Base width (approx. m)	0.90	1.05	1.20	1.35	1.50	1.85	2.20	2.55
Weight (approx. kg)	5.8	6.7	7.6	8.6	9.6	12.0	14.5	18.0
Safety strut (perlon straps)	-	-	-	✓	✓	✓	✓	✓
Order no.	802604	802605	802606	802607	802608	802610	802612	802614

## Recommended accessories:



Set of spring-loaded castors  
Page 97



Set of tip and roll wheels  
Page 97



Rigid safety bars set, detachable  
Page 98



Handrail  
Page 99

# STEP LADDER R13 WITH PLATFORM, SINGLE-SIDED ACCESSIBLE

- Work safety in the highest slip resistance class R13. Suitable for use in oily areas.
- Ergonomic working on 80 mm step depth. Front step edges flush with stile.
- Comfortable and safe standing for longer periods of work thanks to the large platform.
- Solid aluminium tool tray with bucket hook.
- High-strength perlon straps provide reliable safety strut.

## Features:

- R13 coating on the entire step surface.
- Screwed-in ladder feet.
- Platform dimensions 250 x 250 mm.

EN  
131Max.  
150 kg10  
YEAR  
GUARANTEE

862606

Number of steps incl. platform	4	5	6	7	8	10	12	14
Stile (approx. mm)	71	71	71	71	71	71	71	71
Length (approx. m)	1.70	1.95	2.20	2.45	2.70	3.20	3.70	4.20
Standing height (height to platform) (approx. m)	0.93	1.16	1.40	1.63	1.85	2.32	2.78	3.25
Reach height (approx. m)	2.93	3.16	3.40	3.63	3.85	4.32	4.78	5.25
Vertical height (approx. m)	1.55	1.78	2.01	2.25	2.48	2.94	3.40	3.87
Width top/bottom (approx. mm)	305/480	305/500	305/530	305/550	305/570	305/630	305/680	305/740
Base width (approx. m)	0.90	1.05	1.20	1.35	1.50	1.85	2.20	2.55
Weight (approx. kg)	6.3	7.3	8.3	9.5	10.6	13.1	15.3	18.3
Safety strut (perlon straps)	-	-	-	✓	✓	✓	✓	✓
Order no.	862604	862605	862606	862607	862608	862610	862612	862614

## Recommended accessories:



Set of spring-loaded castors  
Page 97



Set of tip and roll wheels  
Page 97



Rigid safety bars set, detachable  
Page 98




Handrail  
Page 99

# STEP LADDER WITH PLATFORM AND CASTORS, SINGLE-SIDED ACCESSIBLE

- Ergonomic working on 80 mm step depth. Front step edges flush with stile.
- Comfortable and safe standing for longer periods of work thanks to the large platform.
- Solid aluminium tool tray with bucket hook.
- Easy manoeuvring thanks to swivelling spring-loaded castors.
- Detachable, rigid braces prevent accidental folding.

## Features:

- **Screwed-in ladder feet.**
- **Platform dimensions 250 x 250 mm.**

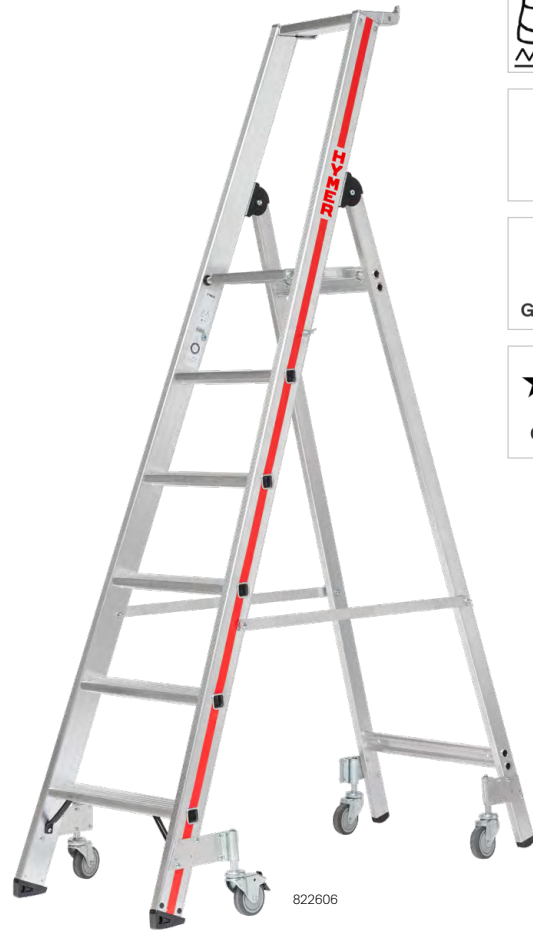EN  
131Max.  
150 kg10  
YEAR  
GUARANTEE

Number of steps incl. platform	4	5	6
Stile (approx. mm)	71	71	71
Length (approx. m)	1.70	1.95	2.20
Standing height (height to platform) (approx. m)	0.93	1.16	1.40
Reach height (approx. m)	2.93	3.16	3.40
Vertical height (approx. m)	1.55	1.78	2.01
Width top/bottom (approx. mm)	305/480	305/500	305/530
Base width (approx. m)	0.90	1.05	1.20
Weight (approx. kg)	9.1	10.1	11.2
Order no.	822604	822605	822606

## Recommended accessories:




Handrail  
Page 99

# STEP LADDER WITH PLATFORM, SINGLE-SIDED ACCESSIBLE

- Ergonomic working on 80 mm step depth.  
Front step edges flush with stile.
- Higher torsional stability thanks to robust D-shaped stiles.
- Maximum stability thanks to 8-fold fully riveted steps.
- Extra-large ladder shoes for stability.
- Easy-to-clean, closed stile.
- Solid aluminium tool tray with bucket hook.
- High-strength perlon straps provide reliable safety strut.

## Features:

- Riveted ladder shoes.
- Platform dimensions 250 x 250 mm.



EN  
131



Max.  
150 kg



10  
YEAR  
GUARANTEE



Number of steps incl. platform	3	4	5	6	7	8	10
Stile (approx. mm)	81	81	81	81	81	81	81
Length (approx. m)	1.45	1.70	1.95	2.22	2.45	2.70	3.20
Standing height (height to platform) (approx. m)	0.68	0.91	1.14	1.37	1.60	1.84	2.30
Reach height (approx. m)	2.68	2.91	3.14	3.37	3.60	3.84	4.30
Vertical height (approx. m)	1.33	1.56	1.79	2.02	2.25	2.49	2.95
Width top/bottom (approx. mm)	305/450	305/475	305/500	305/525	305/550	305/575	305/625
Base width (approx. m)	0.70	0.85	1.00	1.15	1.30	1.50	1.80
Weight (approx. kg)	5.6	5.8	6.6	8.2	9.4	10.5	12.2
Safety strut (perlon straps)	-	-	-	✓	✓	✓	✓
Order no.	602603	602604	602605	602606	602607	602608	602610



# STEP LADDER WITH PLATFORM, SINGLE-SIDED ACCESSIBLE

- Ergonomic working on 80 mm step depth. Front step edges flush with stile.
- Comfortable and safe standing for longer periods of work thanks to the large platform.
- Practical, spacious plastic tray with bucket hook.
- High-strength perlon straps provide reliable safety strut.

## Features:

- Platform dimensions 250 x 250 mm.

EN  
131Max.  
150 kg10  
YEAR  
GUARANTEE

412605



Number of steps incl. platform	3	4	5	6	7	8
Stile (approx. mm)	55	55	55	55	55	55
Length (approx. m)	1.39	1.64	1.89	2.14	2.38	2.64
Standing height (height to platform) (approx. m)	0.65	0.88	1.11	1.34	1.58	1.81
Reach height (approx. m)	2.65	2.88	3.11	3.34	3.58	3.81
Vertical height (approx. m)	1.25	1.49	1.72	1.95	2.18	2.41
Width top/bottom (approx. mm)	280/415	280/440	280/465	280/495	280/520	280/545
Base width (approx. m)	0.70	0.85	1.00	1.15	1.30	1.50
Weight (approx. kg)	4.0	4.9	5.6	6.4	7.4	7.9
Safety strut (perlon straps)	-	-	-	-	✓	✓
Order no.	412603	412604	412605	412606	412607	412608

# STEP LADDER WITH PLATFORM, SINGLE-SIDED ACCESSIBLE

- Ergonomic working on 80 mm step depth. Front step edges flush with stile.
- Comfortable and safe standing for longer periods of work thanks to the large platform.
- Practical, spacious plastic tray with bucket hook.
- Anodised stiles prevent dirty hands from aluminium abrasion.
- High-strength perlon straps provide reliable safety strut.

## Features:

- Platform dimensions 250 x 250 mm.

EN  
131Max.  
150 kg10  
YEAR  
GUARANTEE

402606

Number of steps incl. platform	3	4	5	6	7	8
Stile (approx. mm)	55	55	55	55	55	55
Length (approx. m)	1.37	1.62	1.87	2.12	2.36	2.61
Standing height (height to platform) (approx. m)	0.65	0.88	1.11	1.35	1.58	1.80
Reach height (approx. m)	2.65	2.88	3.11	3.35	3.58	3.80
Vertical height (approx. m)	1.25	1.48	1.71	1.95	2.18	2.40
Width top/bottom (approx. mm)	280/415	280/440	280/465	280/495	280/520	280/545
Base width (approx. m)	0.70	0.85	1.00	1.15	1.30	1.50
Weight (approx. kg)	4.0	4.9	5.6	6.4	7.4	7.9
Safety strut (perlon straps)	-	-	-	-	✓	✓
Order no.	402603	402604	402605	402606	402607	402608

# STEP LADDER, DOUBLE-SIDED ACCESSIBLE

- Ergonomic working on 80 mm step depth. Front step edges flush with stile.
- Torsion-resistant joint made of die-cast aluminium.
- High-strength perlon straps provide reliable safety strut.

## Features:

- **Screw-in ladder feet.**



EN  
131



Max.  
150 kg



**10**  
YEAR  
GUARANTEE



<b>Number of steps</b>	<b>2×3</b>	<b>2×4</b>	<b>2×5</b>	<b>2×6</b>	<b>2×7</b>	<b>2×8</b>	<b>2×9</b>	<b>2×10</b>	<b>2×12</b>
<b>Stile</b> (approx. mm)	71	71	71	71	71	71	71	71	71
<b>Length</b> (approx. m)	0.77	1.04	1.30	1.53	1.80	2.05	2.28	2.54	3.04
<b>Standing height</b> (approx. m)	0.22	0.45	0.69	0.92	1.15	1.38	1.61	1.85	2.31
<b>Reach height</b> (approx. m)	2.22	2.45	2.69	2.92	3.15	3.38	3.61	3.85	4.31
<b>Vertical height</b> (approx. m)	0.70	0.95	1.15	1.40	1.65	1.85	2.10	2.30	2.80
<b>Width top/bottom</b> (approx. mm)	355/430	355/450	355/475	355/500	355/525	355/550	355/575	355/600	355/650
<b>Base width</b> (approx. m)	0.80	0.98	1.15	1.30	1.50	1.70	1.95	2.15	2.50
<b>Weight</b> (approx. kg)	4.8	6.0	7.4	8.7	10.1	11.6	13.0	14.6	17.6
<b>Order no.</b>	<b>802406</b>	<b>802408</b>	<b>802410</b>	<b>802412</b>	<b>802414</b>	<b>802416</b>	<b>802418</b>	<b>802420</b>	<b>802424</b>

## Recommended accessories:



Set of spring-loaded castors  
Page 97



Rigid safety bars set, detachable  
Page 98

# STEP LADDER R13, DOUBLE-SIDED ACCESSIBLE

- Work safety in the highest slip resistance class R13. Suitable for use in oily areas.
- Ergonomic working on 80 mm step depth. Front step edges flush with stile.
- Torsion-resistant joint made of die-cast aluminium.
- High-strength perlon straps provide reliable safety strut.

## Features:

- R13 coating on the entire step surface.
- Screw-in ladder feet.



EN  
131



Max.  
150 kg



10  
YEAR  
GUARANTEE



Number of steps	2×3	2×4	2×5	2×6	2×7	2×8	2×9	2×10	2×12
Stile (approx. mm)	71	71	71	71	71	71	71	71	71
Length (approx. m)	0.77	1.04	1.30	1.53	1.80	2.05	2.28	2.54	3.04
Standing height (approx. m)	0.22	0.45	0.69	0.92	1.15	1.38	1.61	1.85	2.31
Reach height (approx. m)	2.22	2.45	2.69	2.92	3.15	3.38	3.61	3.85	4.31
Vertical height (approx. m)	0.70	0.95	1.15	1.40	1.65	1.85	2.10	2.30	2.80
Width top/bottom (approx. mm)	355/430	355/450	355/475	355/500	355/525	355/550	355/575	355/600	355/650
Base width (approx. m)	0.80	0.98	1.15	1.30	1.50	1.70	1.95	2.15	2.50
Weight (approx. kg)	4.8	6.2	7.6	9.1	10.5	12.1	13.6	15.3	18.7
Order no.	862406	862408	862410	862412	862414	862416	862418	862420	862424

## Recommended accessories:



Set of spring-loaded castors  
Page 97



Rigid safety bars set, detachable  
Page 98

# STEP LADDER WITH CASTORS, DOUBLE-SIDED ACCESSIBLE

- Ergonomic working on 80 mm step depth. Front step edges flush with stile.
- Torsion-resistant joint made of die-cast aluminium.
- Easy manoeuvring thanks to swivelling spring-loaded castors.
- Detachable, rigid braces prevent accidental folding.
- High-strength perlon straps provide reliable safety strut.

## Features:

- Screw-in ladder feet.



822412

EN  
131Max.  
150 kg10  
YEAR  
GUARANTEEMADE IN  
GERMANY

Number of steps	2×3	2×4	2×5	2×6	2×7	2×8
Stile (approx. mm)	71	71	71	71	71	71
Length (approx. m)	0.77	1.04	1.30	1.53	1.80	2.05
Standing height (approx. m)	0.22	0.45	0.69	0.92	1.15	1.38
Reach height (approx. m)	2.22	2.45	2.69	2.92	3.15	3.38
Vertical height (approx. m)	0.70	0.95	1.15	1.40	1.65	1.85
Width top/bottom (approx. mm)	355/430	355/450	355/475	355/500	355/525	355/550
Base width (approx. m)	0.80	0.98	1.15	1.30	1.50	1.70
Weight (approx. kg)	7.8	9.3	10.4	12.0	14.0	15.5
Order no.	822406	822408	822410	822412	822414	822416

# STEP LADDER WITH RETAINING BRACKET

- Ergonomic working on 80 mm step depth. Front step edges flush with stile.
- Torsion-resistant joint made of die-cast aluminium.
- High-strength perlon straps provide reliable safety strut.
- Maximum work safety thanks to retaining bracket.

## Features:

- **Screw-in ladder feet.**



807408

EN  
131Max.  
150 kg10  
YEAR  
GUARANTEE

<b>Number of steps</b>	2×3	2×4	2×5	2×6	2×7	2×8	2×10	2×12
<b>Stile</b> (approx. mm)	71	71	71	71	71	71	71	71
<b>Length</b> (approx. m)	0.77	1.04	1.30	1.53	1.80	2.05	2.54	3.04
<b>Standing height</b> (approx. m)	0.22	0.45	0.69	0.92	1.15	1.38	1.85	2.31
<b>Reach height</b> (approx. m)	2.22	2.45	2.69	2.92	3.15	3.38	3.85	4.31
<b>Width top/bottom</b> (approx. mm)	355/430	355/450	355/475	355/500	355/525	355/550	355/600	355/650
<b>Base width</b> (approx. m)	0.80	0.98	1.15	1.30	1.50	1.70	2.15	2.50
<b>Weight</b> (approx. kg)	5.4	6.4	7.6	9.0	10.2	11.3	14.6	17.3
<b>Order no.</b>	807406	807408	807410	807412	807414	807416	807420	807424

## Recommended accessories:



Set of spring-loaded castors  
Page 97




Rigid safety bars set, detachable  
Page 98

# STEP LADDER, DOUBLE-SIDED ACCESSIBLE

- Ergonomic working on 80 mm step depth. Front edge flush with stile.
- Higher torsional stability thanks to robust D-shaped stiles.
- Maximum stability thanks to 8-fold fully riveted steps.
- Extra-large ladder shoes for stability.
- Easy-to-clean, closed stile.
- High-strength perlon straps provide reliable safety strut.

## Features:

- Riveted ladder shoes.



EN  
131



Max.  
150 kg



10  
YEAR  
GUARANTEE



MADE IN  
GERMANY

	2×3	2×4	2×5	2×6	2×7	2×8	2×10
<b>Number of steps</b>	2×3	2×4	2×5	2×6	2×7	2×8	2×10
<b>Stile</b> (approx. mm)	81	81	81	81	81	81	81
<b>Length</b> (approx. m)	0.78	1.02	1.26	1.50	1.77	2.00	2.50
<b>Standing height</b> (approx. m)	0.21	0.44	0.67	0.91	1.14	1.37	1.83
<b>Reach height</b> (approx. m)	2.21	2.44	2.67	2.91	3.14	3.37	3.84
<b>Vertical height</b> (approx. m)	0.65	0.90	1.15	1.35	1.60	1.80	2.30
<b>Width</b> top/bottom (approx. mm)	375/450	375/475	375/500	375/525	375/550	375/575	375/625
<b>Base width</b> top/bottom (approx. mm)	0.75	0.95	1.15	1.35	1.55	1.75	2.10
<b>Weight</b> (approx. kg)	4.6	5.7	6.9	8.1	9.5	10.8	13.7
<b>Order no.</b>	602406	602408	602410	602412	602414	602416	602420

## Recommended accessories:




Retaining bracket

Page 99

# STEP LADDER, DOUBLE-SIDED ACCESSIBLE

- Ergonomic working on 80 mm step depth. Front step edges flush with stile.
- High-strength perlon straps provide reliable safety strut.
- Compact and lightweight design.
- Anodised stiles prevent dirty hands from aluminium abrasion.



EN  
131



Max.  
150 kg



**10**  
YEAR  
GUARANTEE



Number of steps	2×3	2×4	2×5	2×6	2×7	2×8
Stile (approx. mm)	55	55	55	55	55	55
Length (approx. m)	0.78	1.03	1.28	1.53	1.79	2.02
Standing height (approx. m)	0.19	0.42	0.65	0.88	1.12	1.34
Reach height (approx. m)	2.19	2.42	2.65	2.88	3.12	3.34
Vertical height (approx. m)	0.70	0.90	1.15	1.38	1.61	1.84
Width top/bottom (approx. mm)	340/410	340/435	340/460	340/485	340/510	340/540
Base width (approx. m)	0.75	0.90	1.10	1.30	1.50	1.65
Weight (approx. kg)	3.6	4.5	5.5	6.7	8.0	8.8
Order no.	402406	402408	402410	402412	402414	402416



4124

# STEP LADDER, DOUBLE-SIDED ACCESSIBLE

- Ergonomic working on 80 mm step depth. Front step edges flush with stile.
- High-strength perlon straps provide reliable safety strut.
- Compact and lightweight design.



EN  
131

R11

Max.  
150 kg

10  
YEAR  
GUARANTEE

★ ★ ★  
MADE IN  
GERMANY

Number of steps	2×3	2×4	2×5	2×6	2×7	2×8
Stile (approx. mm)	55	55	55	55	55	55
Length (approx. m)	0.78	1.03	1.28	1.53	1.79	2.02
Standing height (approx. m)	0.19	0.42	0.65	0.88	1.12	1.34
Reach height (approx. m)	2.19	2.42	2.65	2.88	3.12	3.34
Vertical height (approx. m)	0.70	0.90	1.15	1.38	1.61	1.84
Width top/bottom (approx. mm)	340/410	340/435	340/460	340/485	340/510	340/540
Base width (approx. m)	0.75	0.90	1.10	1.30	1.50	1.65
Weight (approx. kg)	3.6	4.5	5.5	6.7	8.0	8.8
Order no.	412406	412408	412410	412412	412414	412416

# RUNG LADDER, DOUBLE-SIDED ACCESSIBLE

- Non-slip, ribbed, rolled profile rungs.
- Conical design ensures ladder stability.
- High-strength perlon straps provide reliable safety strut.

## Features:

- **Screwed-in aluminium hinges.**
- **Press-fitted ladder feet.**



EN  
131

Max.  
150 kg

**10**  
YEAR  
GUARANTEE

★ ★ ★  
MADE IN  
GERMANY

Number of rungs	2×5	2×6	2×7	2×8	2×10	2×12
Stile (approx. mm)	60	60	60	60	60	60
Length (approx. m)	1.47	1.75	2.05	2.33	2.88	3.44
Standing height (approx. m)	0.77	1.00	1.30	1.55	2.07	2.60
Reach height (approx. m)	2.77	3.00	3.30	3.55	4.07	4.60
Vertical height (approx. m)	1.45	1.70	1.95	2.25	2.75	3.30
Width top/bottom (approx. mm)	340/505	340/535	340/565	340/595	340/655	340/715
Base width (approx. m)	0.95	1.15	1.25	1.45	1.85	2.05
Weight (approx. kg)	5.1	6.1	7.3	8.4	10.9	13.6
Order no.	402310	402312	402314	402316	402320	402324

## Recommended accessories:



Add-on steps  
for rung ladders  
Page 90



Folding universal  
ladder step  
Page 90



Bucket hook  
for rung ladders  
Page 100



Tool bag  
Page 100




Foot extension set  
Page 92

# RUNG LADDER, DOUBLE-SIDED ACCESSIBLE

- Increased slip resistance of the rungs thanks to a high rib extruded profile.
- Conical design ensures ladder stability.
- High-strength perlon straps provide reliable safety strut.

## Features:

- **Screwed-in aluminium hinges.**
- **Screw-in ladder feet.**



EN  
131

Max.  
150 kg

**10**  
YEAR  
GUARANTEE

★ ★ ★  
MADE IN  
GERMANY

Number of rungs	2×5	2×6	2×7	2×8	2×9	2×10	2×12	2×14	2×16
Stile (approx. mm)	60	60	60	60	60	60	60	71	71
Length (approx. m)	1.57	1.85	2.13	2.40	2.69	2.95	3.53	4.10	4.65
Standing height (approx. m)	0.82	1.09	1.36	1.63	1.90	2.17	2.71	3.25	3.79
Reach height (approx. m)	2.82	3.09	3.36	3.63	3.90	4.17	4.71	5.25	5.79
Vertical height (approx. m)	1.50	1.75	2.00	2.30	2.55	2.85	3.40	3.90	4.45
Width top/bottom (approx. mm)	340/505	340/535	340/565	340/595	340/625	340/655	340/715	340/775	340/835
Base width (approx. m)	1.00	1.15	1.30	1.45	1.60	1.85	2.05	2.40	2.60
Weight (approx. kg)	5.8	6.8	7.8	9.2	10.3	11.4	14.1	18.8	22.5
Order no.	602310	602312	602314	602316	602318	602320	602324	602328	602332

## Recommended accessories:



Add-on steps  
for rung ladders  
Page 90



Folding universal  
ladder step  
Page 90



Bucket hook  
for rung ladders  
Page 100



Tool bag  
Page 100



Foot extension set  
Page 92

# STAIRWAY LADDER

- Non-slip, ribbed, rolled profile rungs.
- Conical design ensures ladder stability.
- Infinitely height-adjustable thanks to patented, simple locking device.
- High-strength perlon straps provide reliable safety strut.

EN  
131

Max.  
150 kg




**10**  
YEAR  
GUARANTEE

★ ★ ★  
MADE IN  
GERMANY



412310



Number of rungs	2×5	2×6	2×7	2×8
Stile (approx. mm)	60	60	60	60
Length <sup>(1)</sup> (approx. m)	1.47	1.75	2.05	2.35
Standing height <sup>(1)</sup> (approx. m)	0.77	1.00	1.30	1.55
Reach height <sup>(1)</sup> (approx. m)	2.77	3.00	3.30	3.55
Vertical height <sup>(1)</sup> (approx. m)	1.45	1.70	1.95	2.25
Width <sup>(1)</sup> top/bottom (approx. mm)	340/505	340/535	340/565	340/595
Base width <sup>(1)</sup> (approx. m)	0.95	1.15	1.25	1.45
Weight (approx. kg)	12.0	12.8	13.8	15.0
Order no.	412310	412312	412314	412316

Note: Always ascend and descend the ladder section using the short extensions.  
<sup>(1)</sup> Dimensions without foot extensions.

## Recommended accessories:



Add-on steps  
for rung ladders  
Page 90



Folding universal  
ladder step  
Page 90

71499

# WOODEN STEP LADDER, DOUBLE-SIDED ACCESSIBLE

EN  
131

Max.  
150 kg




★ ★ ★  
MADE IN  
GERMANY

- Ergonomic working on 80 mm step depth. Front step edges flush with stile.
- Long-lasting heavy-duty hardwood step.
- Integrated textile bag for tools and small parts.
- Robust bucket hook.
- High-strength perlon straps provide reliable safety strut.

## Features:

- Legal warranty.



7149910

Number of steps	2×4	2×5	2×6	2×7	2×8	2×10	2×12
Stile (approx. mm)	65	65	65	65	65	65	65
Length (approx. m)	1.24	1.52	1.80	2.08	2.36	2.93	3.48
Standing height (approx. m)	0.55	0.85	1.10	1.40	1.65	2.20	2.75
Reach height (approx. m)	2.55	2.85	3.10	3.40	3.65	4.20	4.75
Vertical height (approx. m)	1.18	1.45	1.70	2.00	2.25	2.75	3.30
Width top/bottom (approx. mm)	345/473	345/503	345/535	345/563	345/593	345/653	345/715
Base width (approx. m)	1.01	1.21	1.38	1.56	1.80	2.08	2.44
Weight (approx. kg)	7.5	9.0	11.2	13.5	16.0	19.5	26.0
Order no.	7149908	7149910	7149912	7149914	7149916	7149920	7149924

## Recommended accessories:



Foot extension  
Page 93



Rubber ladder  
shoes set  
Page 91

# WOODEN RUNG LADDER, DOUBLE-SIDED ACCESSIBLE

- Solid rungs made of hardwood.
- Robust bucket hook.
- High-strength perlon straps provide reliable safety strut.

## Features:


- Legal warranty.

EN  
131

Max.  
150 kg



★ ★ ★  
MADE IN  
GERMANY



Number of rungs	2×3	2×4	2×5	2×6	2×7	2×8	2×10	2×12
Stile (approx. mm)	65	65	65	65	65	65	65	65
Length (approx. m)	0.95	1.24	1.52	1.80	2.08	2.36	2.93	3.48
Standing height (approx. m)	0.30	0.55	0.85	1.10	1.40	1.65	2.20	2.75
Reach height (approx. m)	2.30	2.55	2.85	3.10	3.40	3.65	4.20	4.75
Vertical height (approx. m)	0.90	1.18	1.45	1.70	2.00	2.25	2.75	3.30
Width top/bottom (approx. mm)	345/443	345/473	345/503	345/535	345/563	345/593	345/653	345/715
Base width (approx. m)	0.66	0.86	1.02	1.21	1.36	1.47	1.90	2.16
Weight (approx. kg)	4.5	7.0	8.0	10.0	11.0	13.0	17.0	25.0
Order no.	7141006	7141008	7141010	7141012	7141014	7141016	7141020	7141024

## Recommended accessories:



Tool bag  
Page 100



Foot extension  
Page 93



Rubber ladder  
shoes set  
Page 91

---


# MULTIPURPOSE LADDERS

- 58 Telescopic ladders
- 60 Combination ladders, two-section
- 62 Combination ladders, three-section
- 65 Multipurpose ladder


# MULTIPURPOSE LADDERS

**Maximum functionality for maximum flexibility.**


Regardless of use, whether as a leaning, step or extension ladder – one thing is clear: With our highly functional multifunction ladders, even the most demanding tasks in trade crafts and industry can be performed easily, flexibly and comfortably.



Robust locking elements for easy height adjustment.



Easy-to-use, solid hinges for effortless, safe assembly and dismantling.



Non-slip, profiled rungs.



Compact dimensions for space-saving transport.



Increased stability thanks to cross-beams or stabilisers.



Product example:  
"TELESTEP" telescopic ladder 8142




Multipurpose, flexible use.




# ACCESSORIES FOR MULTIPURPOSE LADDERS

Our wide range of multi-function ladders not only provides a variety of ladder types optimally suited to many different applications, but also an extensive selection of accessories to improve ladder stability and workplace ergonomics. Many accessories such as foot pike sets for cross-beams, wall spacers and bucket hooks are available to make your work as easy as possible. Your safety and comfort are our top priority.




**Wall spacer for rung ladders**  
See page 96

- Order no. 0051248  
Telescopic and with tool tray
- Order no. 005485  
Fixed wall distance




**Ladder holder set for gutters**  
See page 96

- Order no. 0051528



**Hang-on step for rung ladders**  
See page 90

- Order no. 0050378  
260×250 mm, foldable
- Order no. 005411  
300×255 mm



**Bucket hook for rung ladders**  
See page 100

- Order no. 0054008




**Add-on steps for rung ladders**  
See page 90

- Order no. 0055318  
Set with 3 pieces
- Order no. 0055324  
1 piece



**Set of foot pikes for cross-beams**  
See page 90 + 91

- Order no. 0050538  
For straight cross-beams
- Order no. 0053761  
For curved cross-beams

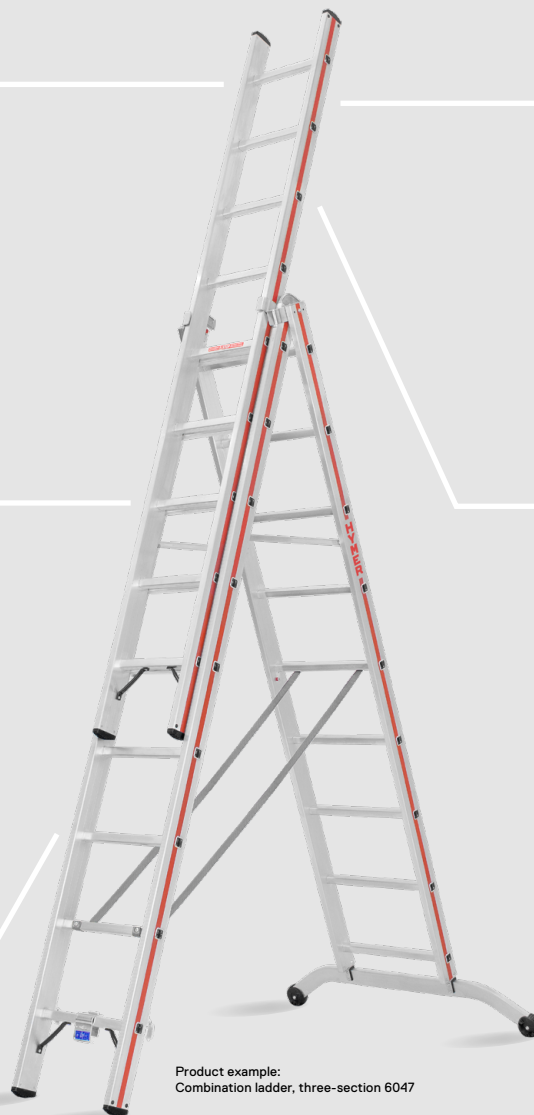

Product example:  
Combination ladder, three-section 6047

# 'TELESTEP' TELESCOPIC LADDER

- Multifunctional use.
- Height adjustable in 280 mm steps.
- Flexible use in stairway mode.
- Easy-to-operate steel hinged joints.
- Highly stable thanks to foldable, transport-optimised telescopic stabilisers.
- Can be easily folded together without first releasing the joint.

## Features:

- **Locking device made of high-quality, cast aluminium.**

EN  
131-4

Max.  
150 kg

**10**  
YEAR  
GUARANTEE

★ ★ ★  
MADE IN  
GERMANY



814220



### Special advantages of 'TELESTEP' 8042/8142:

- The grip discs on the side of the pin joints are ergonomically shaped and ensure easy handling when adjusting the ladder.
- To release the joints simply pull the grip discs on the pin joint outwards and place the ladder in the leaning or freestanding ladder position.
- The joints engage automatically when the required position is reached. In freestanding ladders position, the ladder can still be closed without re-opening the joints.

Number of rungs	4×3	4×4	4×5	4×6
Stile (approx. mm)	60	60	60	60
Number of rungs at max. extension	10	14	18	22
Length leaning ladder (approx. m)	1.85 – 2.92	2.35 – 4.02	2.90 – 5.14	3.46 – 6.26
Standing height freestanding ladder (approx. m)	0.72	1.26	1.80	2.35
Reach height freestanding ladder (approx. m)	2.72	3.26	3.80	4.35
Standing height leaning ladder (approx. m)	2.10	3.00	4.10	5.20
Reach height leaning ladder (approx. m)	4.10	5.00	6.10	7.20
Vertical height freestanding ladder (approx. m)	0.90 – 1.40	1.15 – 1.95	1.40 – 2.49	1.70 – 3.03
Width freestanding ladder top/bottom (approx. mm)	355/555	355/830	355/945	355/1,055
Folded L × W × H (approx. m)	1.00×0.56×0.20	1.20×0.61×0.20	1.50×0.68×0.20	1.80×0.75×0.20
Base width retracted/extended (approx. m)	0.73/1.08	0.90/1.44	1.07/1.80	1.26/2.15
Weight (approx. kg)	11.2	14.2	17.0	21.0
Folding stabiliser	-	✓	✓	✓
Order no.	804212	814216	814220	814224

### Recommended accessories:



Folding universal  
ladder step  
Page 90



Bucket hook  
for rung ladders  
Page 100



Tool bag  
Page 100



Foot extension  
Page 92



Set of swivelling  
foot pikes  
Page 91



Castors set  
Page 97

# TELESCOPIC LADDER

- Multifunctional use.
- Height adjustable in 280 mm steps.
- Flexible use in stairway mode.
- Easy-to-operate steel hinge with locking clamp.
- Highly stable thanks to foldable, transport-optimised telescopic stabilisers.

## Features:

- **Locking device with steel core.**

EN  
131-4



Max.  
150 kg

10  
YEAR  
GUARANTEE

★ ★ ★  
MADE IN  
GERMANY



414220



<b>Number of rungs</b>	4x4	4x5	4x6
<b>Stile</b> (approx. mm)	60	60	60
<b>Number of rungs</b> at max. extension	14	18	22
<b>Length</b> leaning ladder (approx. m)	2.35 – 4.02	2.90 – 5.14	3.46 – 6.26
<b>Standing height</b> freestanding ladder (approx. m)	1.26	1.80	2.35
<b>Reach height</b> freestanding ladder (approx. m)	3.26	3.80	4.35
<b>Standing height</b> leaning ladder (approx. m)	3.00	4.10	5.20
<b>Reach height</b> leaning ladder (approx. m)	5.00	6.10	7.20
<b>Vertical height</b> freestanding ladder (approx. m)	1.15 – 1.95	1.40 – 2.49	1.70 – 3.03
<b>Width</b> freestanding ladder top/bottom (approx. mm)	355/830	355/945	355/1,055
<b>Folded</b> L x W x H (approx. m)	1.20x0.61x0.20	1.50x0.68x0.20	1.80x0.75x0.20
<b>Base width</b> retracted/extended (approx. m)	0.87/1.36	1.03/1.72	1.20/2.01
<b>Weight</b> (approx. kg)	13.2	16.2	19.0
<b>Hinge</b>	A	A	B
<b>Order no.</b>	414216	414220	414224

## Recommended accessories:



**Folding universal ladder step**  
Page 90



**Bucket hook for rung ladders**  
Page 100



**Tool bag**  
Page 100



**Foot extension**  
Page 92



**Set of swivelling foot pikes**  
Page 91



**Castors set**  
Page 97

# COMBINATION LADDER, TWO-SECTION

- Multifunctional use.
- Non-slip, ribbed, rolled profile rungs.
- High-strength perlon straps provide reliable safety strut.

## Features:

- **Ladder inner width 300 mm (top section).**
- **Solid steel fittings.**
- **Press-fitted ladder feet.**

EN  
131

Max.  
150 kg

**10**  
YEAR  
GUARANTEE

★ ★ ★  
MADE IN  
GERMANY



<b>Number of rungs</b>	<b>2×8</b>	<b>2×10</b>	<b>2×12</b>
<b>Stile</b> top/bottom (approx. mm)	60/60	66/66	71/71
<b>Number of rungs</b> at max. extension	14	17	21
<b>Length</b> retracted (approx. m)	2.32	2.88	3.44
<b>Length</b> extended (approx. m)	4.00	4.84	5.98
<b>Standing height</b> freestanding ladder (approx. m)	1.52	2.05	2.59
<b>Reach height</b> freestanding ladder (approx. m)	3.52	4.05	4.59
<b>Standing height</b> leaning ladder (approx. m)	2.93	3.74	4.82
<b>Reach height</b> leaning ladder (approx. m)	4.93	5.74	6.82
<b>Vertical height</b> freestanding ladder (approx. m)	2.05	2.58	3.12
<b>Width</b> extended top/bottom (approx. mm)	355/750	355/948	355/948
<b>Base width</b> (approx. m)	1.55	1.94	2.19
<b>Weight</b> (approx. kg)	9.5	12.1	14.9
<b>Order no.</b>	<b>404516</b>	<b>404520</b>	<b>404524</b>

## Recommended accessories:



Ladder holder set  
for gutters  
Page 96



Folding universal  
ladder step  
Page 90



Bucket hook  
for rung ladders  
Page 100

# COMBINATION LADDER, TWO-SECTION

- Multifunctional use.
- Increased slip resistance of the rungs thanks to a high rib extruded profile.
- High-strength perlon straps provide reliable safety strut.
- More ground clearance and stability thanks to the arched cross-beam.

## Features:


- Ladder inner width 300 mm (top section).
- Solid steel fittings.
- Riveted ladder shoes.

EN  
131

Max.  
150 kg

**10**  
YEAR  
GUARANTEE

★ ★ ★  
MADE IN  
GERMANY



Number of rungs	2×6	2×8	2×10	2×12	2×14
Stile top/bottom (approx. mm)	60/60	60/60	66/66	71/71	83/83
Number of rungs at max. extension	10	14	17	21	25
Length retracted (approx. m)	1.83	2.39	2.95	3.52	4.08
Length extended (approx. m)	2.95	4.07	4.91	6.03	7.16
Standing height freestanding ladder (approx. m)	1.07	1.59	2.12	2.66	3.17
Reach height freestanding ladder (approx. m)	3.07	3.59	4.12	4.66	5.17
Standing height leaning ladder (approx. m)	1.92	3.00	3.82	4.90	5.98
Reach height leaning ladder (approx. m)	3.92	5.00	5.82	6.90	7.98
Vertical height freestanding ladder (approx. m)	1.72	2.25	2.78	3.33	3.82
Width extended top/bottom (approx. mm)	355/960	355/960	355/960	355/1,040	355/1,160
Base width (approx. m)	1.25	1.58	1.98	2.26	2.80
Weight (approx. kg)	8.0	9.9	12.6	15.4	18.4
Order no.	604512	604516	604520	604524	604528

## Recommended accessories:



Ladder holder set  
for gutters  
Page 96



Folding universal  
ladder step  
Page 90





Bucket hook  
for rung ladders  
Page 100

# COMBINATION LADDER, THREE-SECTION

- Multifunctional use.
- Non-slip, ribbed, rolled profile rungs.
- Flexible use in stairway mode\*.
- High-strength perlon straps provide reliable safety strut.
- Detachable, rigid brace prevents accidental folding.

## Features:

- Ladder inner width 300 mm (top section).
- Solid steel fittings.
- Press-fitted ladder feet.



EN  
131

Max.  
150 kg

10  
YEAR  
GUARANTEE

★ ★ ★  
MADE IN  
GERMANY

Number of rungs	3×7	3×8	3×9	3×10	3×11	3×12	3×14
Stile top/middle/bottom (approx. mm)	60/66/60	60/71/60	71/83/71	71/83/71	71/83/71	71/89/71	89/89/89
Number of rungs at max. extension	17	19	23	25	27	30	34
Length retracted (approx. m)	2.07	2.35	2.63	2.91	3.19	3.47	4.11
Length leaning ladder extended (approx. m)	4.87	5.43	6.55	7.11	7.67	8.51	9.72
Standing height freestanding l. with ext. (approx. m)	2.06	2.59	3.12	3.65	3.92	4.44	5.23
Reach height freestanding l. with ext. (approx. m)	4.06	4.59	5.12	5.65	5.92	6.44	7.23
Standing height leaning ladder (approx. m)	3.73	4.29	5.39	5.94	6.49	7.32	8.34
Reach height leaning ladder (approx. m)	5.73	6.29	7.39	7.94	8.49	9.32	10.34
Vertical height freestanding l. with ext. (approx. m)	3.29	3.81	4.33	4.86	5.11	5.65	6.53
Width extended top/middle/bottom (approx. mm)	355/425/837	355/425/1,005	355/425/1,005	355/425/1,200	355/425/1,200	355/425/1,200	355/425/1,200
Base width (approx. m)	1.37	1.61	1.80	1.95	2.16	2.34	2.72
Weight (approx. kg)	13.2	15.0	18.0	19.7	22.0	24.2	33.4
Stairway mode	with clamp fitting set*	with clamp fitting set*	with clamp fitting set*	with clamp fitting set*	-	-	-
Order no.	404721	404724	404727	404730	404733	404736	404742

## Recommended accessories:



Add-on steps  
for rung ladders  
Page 90



Clamp fitting  
set for stairway  
mode  
Page 94



Wall spacer  
for rung ladders  
Page 96



Ladder holder set  
for gutters  
Page 96



Folding universal  
ladder step  
Page 90



Set of foot pikes  
for cross-beams  
Page 90





Bucket hook  
for rung ladders  
Page 100

# COMBINATION LADDER, THREE-SECTION

- Multifunctional use.
- Increased slip resistance of the rungs thanks to a high rib extruded profile.
- Convenient extension of the ladder using wall rollers.
- Flexible use in stairway mode\*.
- High-strength perlon straps provide reliable safety strut.
- Detachable, rigid braces prevent accidental folding.
- More ground clearance and stability thanks to the arched cross-beam.

## Features:

- Ladder inner width 300 mm (top section).
- Solid steel fittings.
- Riveted ladder feet.

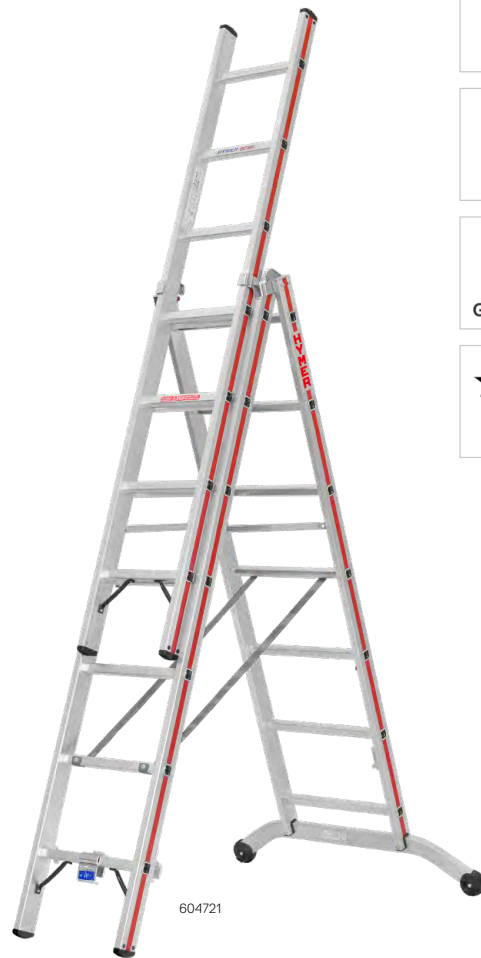

EN  
131

Max.  
150 kg

10  
YEAR  
GUARANTEE

★ ★ ★  
MADE IN  
GERMANY

Number of rungs	3×6	3×7	3×8	3×9	3×10	3×12	3×14
Stile top/middle/bottom (approx. mm)	60/60/60	66/66/66	71/71/71	83/83/83	83/83/83	89/89/89	89/89/89
Number of rungs at max. extension	14	17	19	23	25	30	34
Length retracted (approx. m)	1.87	2.15	2.43	2.71	3.02	3.63	4.17
Length leaning ladder extended (approx. m)	4.11	4.95	5.51	6.63	7.22	8.66	9.78
Standing height freestanding l. with ext. (approx. m)	1.60	2.13	2.65	3.20	3.71	4.55	5.31
Reach height freestanding l. with ext. (approx. m)	3.60	4.13	4.65	5.20	5.71	6.55	7.31
Standing height leaning ladder (approx. m)	3.00	3.80	4.35	5.45	5.99	7.34	8.42
Reach height leaning ladder (approx. m)	5.00	5.80	6.35	7.45	7.99	9.34	10.42
Vertical height freestanding l. with ext. (approx. m)	2.89	3.42	3.95	4.42	4.97	5.80	6.58
Width extended top/middle/bottom (approx. mm)	355/425/1,030	355/425/1,030	355/425/1,030	355/425/1,160	355/425/1,160	355/425/1,285	355/425/1,285
Base width (approx. m)	1.31	1.50	1.64	1.82	2.00	2.36	2.73
Weight (approx. kg)	13.0	14.6	17.6	20.6	23.3	30.0	35.5
Wall rollers	-	-	-	-	✓	✓	✓
Safety strut (rigid braces)	-	✓	✓	✓	✓	✓	✓
Stairway mode	✓	✓	✓	✓	with clamp fitting set*	-	-
Order no.	604718	604721	604724	604727	604730	604736	604742

## Recommended accessories:



Add-on steps  
for rung ladders  
Page 90



\* Clamp fitting  
set for stairway  
mode  
Page 94



Wall spacer  
for rung ladders  
Page 96



Ladder holder set  
for gutters  
Page 96



Folding universal  
ladder step  
Page 90



Set of foot pikes  
for cross-beams  
Page 91




Bucket hook  
for rung ladders  
Page 100

# STEP-COMBINATION LADDER, THREE-SECTION

- Multifunctional use.
- Ergonomic working on 80 mm step depth on the upper section. Front step edges flush with stile.
- Lower weight due to the combination of steps and rungs.
- Increased slip resistance of steps and rungs thanks to a high rib extruded profile.
- Convenient extension of the ladder using wall rollers.
- High-strength perlon straps provide reliable safety strut.
- Detachable, rigid braces prevent accidental folding.
- More ground clearance and stability thanks to the arched cross-beam.

## Features:

- Ladder inner width 300 mm (top section).
- Solid steel fittings.
- Riveted ladder feet.

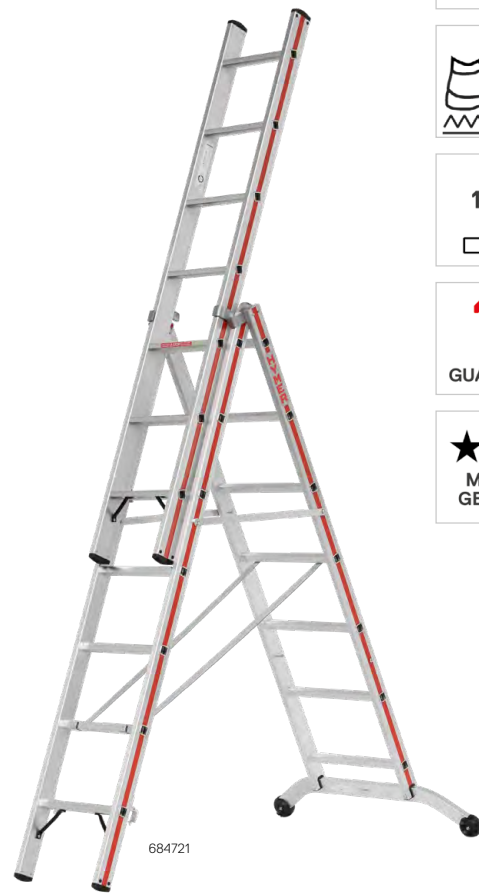

EN  
131



Max.  
150 kg  
↓

10  
YEAR  
GUARANTEE

★ ★ ★  
MADE IN  
GERMANY

Number of rungs/steps	3×6	3×7	3×8	3×9	3×10
Stile top/middle/bottom (approx. mm)	83/66/66	83/66/66	83/83/83	83/83/83	83/83/83
Number of rungs/steps at max. extension	14	17	20	23	25
Length retracted (approx. m)	1.83	2.11	2.44	2.72	3.00
Length leaning ladder extended (approx. m)	4.07	4.91	5.80	6.64	7.20
Standing height freestanding ladder with extension (approx. m)	1.58	2.08	2.60	3.12	3.63
Reach height freestanding ladder with extension (approx. m)	3.58	4.08	4.60	5.12	5.63
Standing height leaning ladder (approx. m)	2.89	3.67	4.45	5.23	5.75
Reach height leaning ladder (approx. m)	4.89	5.67	6.45	7.23	7.75
Vertical height freestanding ladder with extension (approx. m)	2.76	3.28	3.83	4.35	4.86
Width extended top/middle/bottom (approx. mm)	355/425/1,030	355/425/1,030	355/425/1,160	355/425/1,160	355/425/1,160
Base width (approx. m)	1.43	1.63	1.90	2.11	2.33
Weight (approx. kg)	14.8	16.6	21.2	22.6	26.3
Wall rollers	-	-	✓	✓	✓
Order no.	684718	684721	684724	684727	684730

## Recommended accessories:



Wall spacer  
for rung ladders  
Page 96



Ladder holder set  
for gutters  
Page 96



Folding universal  
ladder step  
Page 90



Set of foot pikes  
for cross-beams  
Page 91



Bucket hook  
for rung ladders  
Page 100



# MULTIPURPOSE LADDER

- Non-slip, ribbed, rolled profile rungs.
- Multifunctional use.
- Requires little space to transport and store.
- Easy-to-operate steel bracket joints.


EN  
131-4

Max.  
150 kg





**10**  
YEAR  
GUARANTEE

★ ★ ★  
MADE IN  
GERMANY



These positions are only possible with 4143.



Size 4x3 only.



<b>Number of rungs</b>	4x3	4x4
<b>Stile</b> (approx. mm)	60	60
<b>Length</b> leaning ladder (approx. m)	3.47	4.59
<b>Standing height</b> freestanding ladder (approx. m)	1.01	1.55
<b>Reach height</b> freestanding ladder (approx. m)	3.01	3.55
<b>Standing height</b> leaning ladder (approx. m)	2.50	3.60
<b>Reach height</b> leaning ladder (approx. m)	4.50	5.60
<b>Working platform</b> L x W x H (approx. m)	1.40x0.29x0.90	-
<b>Folded</b> L x W x H (approx. m)	0.90x0.70x0.30	1.20x0.81x0.30
<b>Vertical height</b> freestanding ladder (approx. m)	1.70	2.25
<b>Width</b> freestanding ladder top/bottom (approx. mm)	355/697	355/810
<b>Base width</b> (approx. m)	1.15	1.48
<b>Weight</b> (approx. kg)	15.5	14.6
<b>Platform</b>	✓	-
<b>Order no.</b>	414312	404316

## Recommended accessories:



Folding universal  
ladder step

Page 90

---

# PLATFORM LADDERS AND STOCKERS' LADDERS

69 Platform ladders with handrail and wheels


74 HYMER ProTect platform ladders

77 Mobile stockers' ladders

# PLATFORM LADDERS AND STOCKERS' LADDERS

Industrial and craft trade tasks at a permanently safe level.

Occupational safety and health protection are becoming increasingly important. Our platform ladders and stockers' ladders impress with their high level of functionality and comfort, especially for tasks lasting longer periods of time. This increases the safety of different types of task.



Safety-relevant equipment variants such as handrails, guardrails, fall protection or safety doors.



Ergonomic, non-slip working on at least 80 mm step depths or with profiled rungs for safe traffic routes.



Stable standing thanks to conical design, cross-beam or stabiliser.



Product example:  
HYMER ProTec platform ladder 8483



Comfortable and safe standing for longer periods of work thanks to platform.



Easy to move and transport using castors.

# ACCESSORIES FOR PLATFORM LADDERS AND STOCKERS' LADDERS

Platform ladders and stockers' ladders are ideal for longer periods of work at height thanks to their broad step surface. We also want to make working even easier in this product segment. Our range of accessories for platform ladders and stocker's ladders includes various castors that make it as easy as possible to move the access technology to the right place of use. Additional handrails and back protection doors are also available for safe access and standing on stairs.

Product example left:  
Platform ladder  
with handrail 8080

Product example right:  
Mobile stocker's ladder,  
double-sided accessible 6889



**Set of spring-loaded castors, self-locking for platform ladders**  
See page 97

- Order no. 0054646  
Fixed to ladder section
- Order no. 0054647  
Swivelling on ladder section
- Order no. 0054648  
Fixed to support section
- Order no. 0054649  
Swivelling on support section



**Set of tip and roll wheels for platform ladders**  
See page 97

- Order no. 0052316



**Back protection door, self-closing for stockers' ladders**  
See page 99

- Order no. 0054880



**Handrail for stockers' ladders**  
See page 99

- Order no. 0051777  
For number of steps 4+5
- Order no. 0051778  
For number of steps 6+7
- Order no. 0051780  
For number of steps 8

# PLATFORM LADDER WITH LONG HANDRAIL

- Comfortable and safe standing for longer periods of work thanks to the large platform.
- Ergonomic working on 80 mm step depth. Front step edges flush with stile.
- Detachable, rigid brace prevents accidental folding.
- Ergonomically shaped handrails on both sides.
- Conical design ensures ladder stability.

## Features:

- Platform dimensions 440 x 400 mm.
- Guardrail height above platform 1,000 mm.

EN  
131Max.  
150 kg10  
YEAR  
GUARANTEE

	4	5	6	8	10
Number of steps incl. platform	4	5	6	8	10
Stile (approx. mm)	71	71	71	71	71
Length (approx. m)	2.10	2.35	2.60	3.10	3.60
Standing height (height to platform) (approx. m)	0.95	1.18	1.42	1.88	2.34
Reach height (approx. m)	2.95	3.18	3.42	3.88	4.34
Vertical height (approx. m)	1.97	2.20	2.43	2.89	3.36
Width (approx. mm)	653	677	700	747	793
Base width (approx. m)	0.99	1.15	1.30	1.62	1.94
Weight (approx. kg)	10.3	11.5	12.5	15.7	19.0
Order no.	807804	807805	807806	807808	807810

## Recommended accessories:



Set of tip and roll wheels  
Page 97



Rigid safety bars set  
Page 98

# PLATFORM LADDER WITH HANDRAIL

- Comfortable and safe standing for longer periods of work thanks to the large platform.
- Ergonomic working on 80 mm step depth. Front step edges flush with stile.
- Solid aluminium tool tray with bucket hook.
- High-strength perlon straps provide reliable safety strut.
- Detachable, rigid braces prevent accidental folding.
- Ergonomically shaped handrails on both sides.
- Conical design ensures ladder stability.

## Features:

- Platform dimensions 440 x 400 mm.
- Guardrail height above platform 800 mm.



EN  
131



Max.  
150 kg



**10**  
YEAR  
GUARANTEE



Number of steps incl. platform	4	5	6	7	8	9	10	12
Stile (approx. mm)	71	71	71	71	71	71	71	71
Length (approx. m)	1.95	2.20	2.45	2.70	2.95	3.20	3.45	3.95
Standing height (height to platf.) (approx. m)	0.95	1.18	1.42	1.65	1.88	2.11	2.34	2.80
Reach height (approx. m)	2.95	3.18	3.42	3.65	3.88	4.11	4.34	4.80
Vertical height (approx. m)	1.77	2.00	2.24	2.47	2.70	2.93	3.16	3.62
Width (approx. mm)	653	677	700	723	747	770	793	840
Base width (approx. m)	0.99	1.15	1.30	1.46	1.62	1.78	1.94	2.26
Weight (approx. kg)	9.7	10.7	12.0	13.3	14.4	16.0	17.2	22.2
Safety strut (perlon straps)	-	-	-	-	✓	✓	✓	✓
Order no.	808004	808005	808006	808007	808008	808009	808010	808012

## Recommended accessories:



Set of spring-loaded castors  
Page 97



Set of tip and roll wheels  
Page 97

# PLATFORM LADDER WITH HANDRAIL AND CASTORS

- Comfortable and safe standing for longer periods of work thanks to the large platform.
- Ergonomic working on 80 mm step depth. Front step edges flush with stile.
- Solid aluminium tool tray with bucket hook.
- Easy manoeuvring thanks to swivelling spring-loaded castors.
- Detachable, rigid braces prevent accidental folding.
- Ergonomically shaped handrails on both sides.
- Conical design ensures ladder stability.

## Features:

- Platform dimensions 440 x 400 mm.
- Guardrail height above platform 800 mm.
- 4 swivelling spring-loaded castors.



EN  
131



Max.  
150 kg



**10**  
YEAR  
GUARANTEE



MADE IN  
GERMANY

Number of steps incl. platform	4	5	6
Stile (approx. mm)	71	71	71
Length (approx. m)	1.95	2.20	2.45
Standing height (height to platform) (approx. m)	0.95	1.18	1.42
Reach height (approx. m)	2.95	3.18	3.42
Vertical height (approx. m)	1.77	2.00	2.24
Width (approx. mm)	653	677	700
Base width (approx. m)	0.99	1.15	1.30
Weight (approx. kg)	12.1	13.1	14.4
Order no.	858004	858005	858006

# PLATFORM LADDER WITH TIP AND ROLL WHEELS AND LONG HANDRAIL

- Ergonomic working on 80 mm step depth. Front step edges flush with stile.
- Solid aluminium tool tray with bucket hook.
- High-strength perlon straps provide reliable safety strut.
- Detachable, rigid braces prevent accidental folding.
- Ergonomically shaped handrails on both sides.
- Conical design ensures ladder stability.

## Features:

- Platform dimensions 440 x 400 mm.
- Guardrail height above platform 800 mm.

EN  
131Max.  
150 kg  
↓10  
YEAR  
GUARANTEE★ ★ ★  
MADE IN  
GERMANY

Number of steps incl. platform	4	5	6	7	8	9	10	12
Stile (approx. mm)	71	71	71	71	71	71	71	71
Length (approx. m)	1.95	2.20	2.45	2.70	2.95	3.20	3.45	3.95
Standing height (height to platf.) (approx. m)	0.95	1.18	1.42	1.65	1.88	2.11	2.34	2.80
Reach height (approx. m)	2.95	3.18	3.42	3.65	3.88	4.11	4.34	4.80
Vertical height (approx. m)	1.77	2.00	2.24	2.47	2.70	2.93	3.16	3.62
Width (approx. mm)	653	677	700	723	747	770	793	840
Base width (approx. m)	0.99	1.15	1.30	1.46	1.62	1.78	1.94	2.26
Weight (approx. kg)	9.9	10.9	12.2	13.5	14.6	16.2	17.4	22.4
Safety strut (perlon straps)	-	-	-	-	✓	✓	✓	✓
Order no.	808104	808105	808106	808107	808108	808109	808110	808112



# PLATFORM LADDER R13 WITH TIP AND ROLL WHEELS AND LONG HANDRAIL

- Work safety in the highest slip resistance class R13. Suitable for use in oily areas.
- Ergonomic working on 80 mm step depth. Front step edges flush with stile.
- Solid aluminium tool tray with bucket hook.
- High-strength perlon straps provide reliable safety strut.
- Detachable, rigid braces prevent accidental folding.
- Ergonomically shaped handrails on both sides.
- Conical design ensures ladder stability.

## Features:

- R13 coating on the entire step surface.
- Platform dimensions 440 x 400 mm.
- Guardrail height above platform 800 mm.

EN  
131Max.  
150 kg10  
YEAR  
GUARANTEE★ ★ ★  
MADE IN  
GERMANY





Number of steps incl. platform	4	5	6	7	8	9	10	12
Stile (approx. mm)	71	71	71	71	71	71	71	71
Length (approx. m)	1.95	2.20	2.45	2.70	2.95	3.20	3.45	3.95
Standing height (height to platf.) (approx. m)	0.95	1.18	1.42	1.65	1.88	2.11	2.34	2.80
Reach height (approx. m)	2.95	3.18	3.42	3.65	3.88	4.11	4.34	4.80
Vertical height (approx. m)	1.77	2.00	2.24	2.47	2.70	2.93	3.16	3.62
Width (approx. mm)	653	677	700	723	747	770	793	840
Base width (approx. m)	0.99	1.15	1.30	1.46	1.62	1.78	1.94	2.26
Weight (approx. kg)	11.7	12.9	14.2	16.2	17.6	18.5	19.8	24.5
Safety strut (perlon straps)	-	-	-	-	✓	✓	✓	✓
Order no.	868104	868105	868106	868107	868108	868109	868110	868112

# HYMER PROTECT PLATFORM LADDER

- Hands-free, safe working thanks to fall protection on all sides and self-closing safety door.
- Highly stable thanks to foldable, transport-optimised telescopic stabilisers.
- Comfortable and safe standing for longer periods of work thanks to the large platform.
- Safer traffic route thanks to comfort rung.
- Optimum transport by means of tip and roll wheels.

## Features:

- Platform dimensions 600 x 425 mm.
- Comfortable 45 mm rung depth.

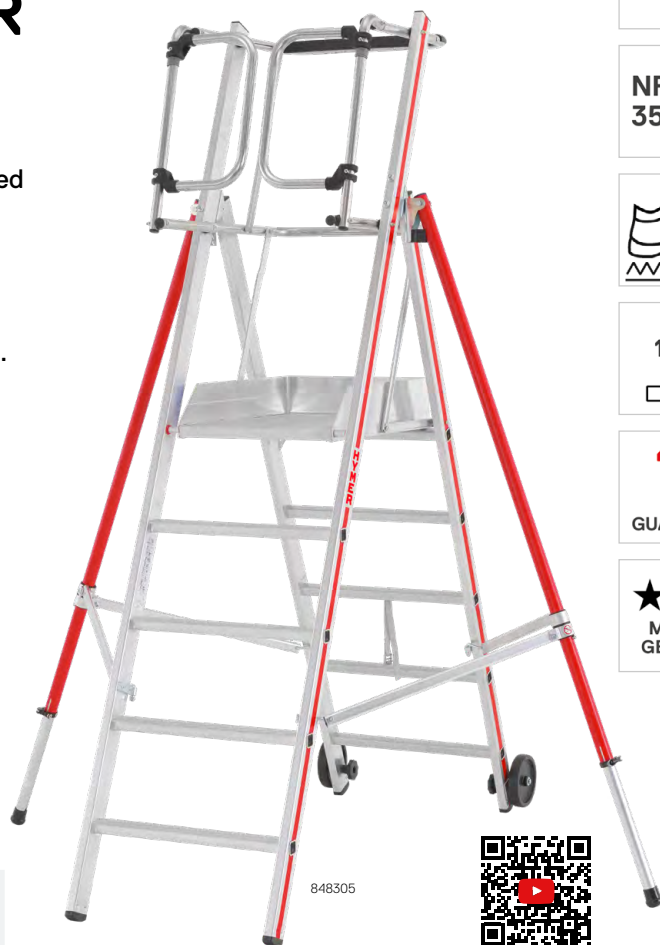

EN  
131-7

NF P 93-  
352/353



Max.  
150 kg

10  
YEAR  
GUARANTEE

★ ★ ★  
MADE IN  
GERMANY




848305

Number of rungs incl. platform	3	4	5	6	7	8
Stile (approx. mm)	60	60	60	60	60	60
Length (approx. m)	1.85	2.10	2.35	2.60	2.85	3.10
Standing height (height to platform) (approx. m)	0.70	0.93	1.16	1.39	1.62	1.85
Reach height (approx. m)	2.70	2.93	3.16	3.39	3.62	3.85
Vertical height (approx. m)	1.73	1.96	2.19	2.43	2.66	2.89
Width (approx. mm)	650	1,760	1,930	2,110	2,255	2,445
Base width (approx. m)	1.21	1.40	1.59	1.77	1.97	2.18
Folded L x W x H (approx. m)	2.08x0.56x0.25	2.34x0.70x0.25	2.59x0.70x0.25	2.85x0.70x0.25	3.09x0.70x0.25	3.32x0.70x0.25
Weight (approx. kg)	14.2	20.4	22.3	23.4	25.0	26.2
Stabilisers	*	✓	✓	✓	✓	✓
Order no.	848303	848304	848305	848306	848307	848308

\* Note: For standard conform use in France, the extension set 0054734 must also be ordered and fitted.

## Recommended accessories:



Extension set  
Page 94




Stabilisers set  
Page 94

# HYMER PROTECT+ PLATFORM LADDER

- Hands-free, safe working thanks to fall protection on all sides and self-closing safety door.
- Highly stable thanks to foldable, transport-optimised telescopic stabilisers.
- Comfortable and safe standing for longer periods of work thanks to the large platform.
- Safer traffic route thanks to comfort rung.
- Optimum transport by means of tip and roll wheels.
- Flexible use in stairway mode.

## Features:

- Platform dimensions 600 x 425 mm.
- Comfortable 45 mm rung depth.



848408

EN  
131-7NF P 93-  
352/353Max.  
150 kg10  
YEAR  
GUARANTEE

Number of rungs incl. platform	3-5	5-8	6-10
Included basic ladder	848303	848305	848306
Included extension	0054730+0054734	0054731	0054732
Stile (approx. mm)	60	60	60
Length (approx. m)	2.06 - 2.31	2.36 - 3.06	2.61 - 3.56
Standing height (height to platform) (approx. m)	0.86 - 1.09	1.15 - 1.77	1.39 - 2.24
Reach height (approx. m)	2.86 - 3.09	3.15 - 3.77	3.39 - 4.24
Vertical height (approx. m)	1.90 - 2.13	2.20 - 2.81	2.43 - 3.29
Width (approx. mm)	1,775 - 1,975	1,925 - 2,410	2,110 - 2,780
Base width (approx. m)	1.50 - 1.64	1.69 - 2.28	1.87 - 2.65
Folded L x W x H (approx. m)	2.30x0.70x0.32	2.59x0.70x0.32	2.85x0.70x0.32
Weight (approx. kg)	25.4	30.4	33.0
Order no.	848405	848408	848410

# PLATFORM LADDER HYMER **PROTECT C**

- Hands-free, safe working thanks to fall protection on all sides.
- Comfortable and safe standing for longer periods of work thanks to the large platform.
- Comfortable way up thanks to 80 mm step depth.
- Highly stable thanks to foldable, transport-optimised stabilisers.
- Optimum transport by means of tip and roll wheels.
- Brace-free support section for more flexible usage.

## Features:

- Platform dimensions 500 x 424 mm.



838305

EN  
131-7NF P 93-  
352/353Max.  
150 kg10  
YEAR  
GUARANTEE


Number of steps incl. platform	2	3	4	5	6
Stile (approx. mm)	71	71	71	71	71
Length (approx. m)	1.61	1.86	2.11	2.36	2.61
Standing height (height to platform) (approx. m)	0.46	0.69	0.92	1.16	1.39
Reach height (approx. m)	2.46	2.69	2.92	3.16	3.39
Vertical height (approx. m)	1.51	1.74	1.97	2.21	2.44
Width (approx. mm)	572	1,168	1,168	1,730	1,730
Base width (approx. m)	0.81	1.04	1.20	1.36	1.51
Folded LxWxH (approx. m)	1.75x0.58x0.28	2.00x0.61x0.32	2.26x0.61x0.32	2.51x0.61x0.32	2.76x0.61x0.32
Weight (approx. kg)	11.3	15.5	16.1	18.2	19.3
Foldable stabilisers	-	✓	✓	✓	✓
Order no.	838302	838303	838304	838305	838306

# MOBILE STOCKER'S LADDER, SINGLE-SIDED ACCESSIBLE

- Spacious work surface and three-sided guardrail for safe, ergonomic work.
- Non-slip, convenient ascent thanks to the large step.

## Features:

- Platform dimensions 600 x 800 mm.
- Guardrail height 1,003 mm.
- Step depth 200 mm.



EN  
131-7



Max.  
150 kg

10  
YEAR  
GUARANTEE



Number of steps incl. platform	3	4	5	6	7	8
Stile (approx. mm)	73	73	73	73	73	73
Standing height (height to platform) (approx. m)	0.73	0.97	1.21	1.46	1.70	1.94
Reach height (approx. m)	2.73	2.97	3.21	3.46	3.70	3.94
Vertical height (approx. m)	1.76	2.00	2.24	2.49	2.73	2.97
Width (approx. mm)	890	890	890	1,070	1,200	1,200
Distance from front to wall (approx. mm)	106	149	192	235	278	321
Base width (approx. m)	1.27	1.45	1.63	1.82	2.00	2.18
Weight (approx. kg)	30.2	34.1	37.7	41.8	45.8	48.8
Order no.	688803	688804	688805	688806	688807	688808

## Recommended accessories:



Handrail  
Page 99




Back protection  
door, self-closing  
Page 99

# MOBILE STOCKER'S LADDER, DOUBLE-SIDED ACCESSIBLE

- Spacious work surface and both-sided guardrail for safe, ergonomic work.
- Non-slip, convenient ascent thanks to the large step.

## Features:

- Platform dimensions 600 x 800 mm.
- Guardrail height 1,003 mm.
- Step depth 200 mm.



EN  
131-7



Max.  
150 kg

10  
YEAR  
GUARANTEE



Number of steps incl. platform	2×3	2×4	2×5	2×6	2×7	2×8
Stile (approx. mm)	73	73	73	73	73	73
Standing height (height to platform) (approx. m)	0.73	0.97	1.21	1.46	1.70	1.94
Reach height (approx. m)	2.73	2.97	3.21	3.46	3.70	3.94
Vertical height (approx. m)	1.76	2.00	2.24	2.49	2.73	2.97
Width (approx. mm)	890	890	890	1,070	1,200	1,200
Base width (approx. m)	1.51	1.79	2.07	2.35	2.63	2.91
Weight (approx. kg)	32.9	37.9	42.9	49.5	54.9	59.7
Order no.	688903	688904	688905	688906	688907	688908

## Recommended accessories:



Handrail  
Page 99



Back protection  
door, self-closing  
Page 99

---

# PRODUCTS FOR SPECIAL APPLICATIONS

80 GRP Step ladder with platform, single-sided accessible

81 GRP Step ladder, double-sided accessible

82 GRP Rung ladder, double-sided accessible

83 GRP Rung leaning ladder

84 Roof ladders

85 Window cleaner's ladder

86 Orchard ladders

88 Fuelling ladder


# STEP LADDER WITH PLATFORM, SINGLE-SIDED ACCESSIBLE

EN  
131Max.  
150 kg

- Ergonomic working on 88 mm step depth.
- Comfortable and safe standing for longer periods of work thanks to the large platform.
- 100% metal-free. All components made of (glass fibre) plastic.
- Particularly suitable for the chemical, electrical and food industries.
- High-strength perlon straps provide reliable safety strut.

## Features:

- Platform dimensions 250 x 250 mm.
- Approved for 1,000 V.
- Legal warranty.



	4	5	6
Number of steps incl. platform	4	5	6
Stile (approx. mm)	58	58	58
Length (approx. m)	1.66	1.91	2.16
Standing height (height to platform) (approx. m)	0.94	1.17	1.41
Reach height (approx. m)	2.94	3.17	3.41
Vertical height (approx. m)	1.56	1.79	2.03
Width top/bottom (approx. mm)	310/470	310/500	310/530
Base width (approx. m)	0.80	0.97	1.14
Weight (approx. kg)	7.9	9.4	11.4
Order no.	392604	392605	392606



# STEP LADDER, DOUBLE-SIDED ACCESSIBLE

EN  
131Max.  
150 kg

- Ergonomic working on 88 mm step depth.
- 100% metal-free. All components made of (glass fibre) plastic.
- Particularly suitable for the chemical, electrical and food industries.
- High-strength perlon straps provide reliable safety strut.

## Features:

- **Approved for 1,000 V.**
- **Legal warranty.**



	2×3	2×4	2×5
<b>Number of steps</b>	2×3	2×4	2×5
<b>Stile</b> (approx. mm)	58	58	58
<b>Length</b> (approx. m)	0.75	1.00	1.25
<b>Standing height</b> (approx. m)	0.25	0.48	0.72
<b>Reach height</b> (approx. m)	2.25	2.48	2.72
<b>Vertical height</b> (approx. m)	0.70	0.94	1.17
<b>Width</b> top/bottom (approx. mm)	350/450	350/470	350/500
<b>Base width</b> (approx. m)	0.63	0.80	0.97
<b>Weight</b> (approx. kg)	5.6	7.6	9.4
<b>Order no.</b>	392406	392408	392410

# RUNG LADDER, DOUBLE-SIDED ACCESSIBLE

EN  
131Max.  
150 kg

- Non-slip, ribbed rungs.
- 100% metal-free. All components made of (glass fibre) plastic.
- Particularly suitable for the chemical, electrical and food industries.
- Equipped with comfort rungs from the third to the sixth rung from above.
- High-strength perlon straps provide reliable safety strut.

## Features:

- **Comfort rung depth of 52 mm.**
- **Approved for 1,000 V.**
- **Legal warranty.**



392314

	2×6	2×7	2×8
Number of rungs	2×6	2×7	2×8
Stile (approx. mm)	58	58	58
Length (approx. m)	1.83	2.11	2.39
Standing height (approx. m)	1.03	1.30	1.56
Reach height (approx. m)	3.03	3.30	3.56
Vertical height (approx. m)	1.71	1.98	2.24
Width top/bottom (approx. mm)	350/540	350/580	350/610
Base width (approx. m)	1.33	1.52	1.71
Weight (approx. kg)	10.1	11.6	13.2
Order no.	392312	392314	392316

# RUNG LEANING LADDER

- Non-slip, ribbed rungs.
- 100% metal-free. All components made of (glass fibre) plastic.
- Particularly suitable for the chemical, electrical and food industries.

## Features:

- **Approved for 1,000 V.**
- **Legal warranty.**

EN  
131

Max.  
150 kg



	6	8	10
<b>Number of rungs</b>	6	8	10
<b>Stile</b> (approx. mm)	58	58	58
<b>Length</b> (approx. m)	1.93	2.49	3.05
<b>Standing height</b> (approx. m)	0.81	1.35	1.89
<b>Reach height</b> (approx. m)	2.81	3.35	3.89
<b>Width</b> top/bottom (approx. mm)	410/410	410/410	410/810
<b>Weight</b> (approx. kg)	4.5	6.2	7.4
<b>Ladder bottom</b>	A	A	B
<b>Order no.</b>	391106	391108	391110

# ROOF LADDERS

- Functional use of the rung pitch side or flat side as step surface.
- Sturdy screwed stile-rung connection.

**Features:**



- Suitable for roof pitches from 20° to 55°.
- T-stile profile (85 mm).

DIN  
4567-4

Max.  
150 kg  
↓

**10**  
YEAR  
GUARANTEE

★ ★ ★  
MADE IN  
GERMANY



Colour	4095 natural aluminium			4096 RAL 8004 brick red coated			4092 RAL 7016 anthracite coated			4093 RAL 8014 sepia brown coated		
	7	10	14	7	10	14	7	10	14	7	10	14
Number of rungs	7	10	14	7	10	14	7	10	14	7	10	14
Length (approx. m)	1.95	2.80	3.90	1.95	2.80	3.90	1.95	2.80	3.90	1.95	2.80	3.90
Width (approx. mm)	350	350	350	350	350	350	350	350	350	350	350	350
Weight (approx. kg)	3.5	4.9	6.8	3.5	4.9	6.8	3.5	4.9	6.8	3.5	4.9	6.8
Order no.	409507	409510	409514	409607	409610	409614	409207	409210	409214	409307	409310	409314

Note: Roof-mounted ladders must be installed at right angles to the ridge. Roof ladders must be secured on the second rung from top with safety roof hooks according to EN 517. The ladder foot is to be secured against moving sideways by more than 30 cm, e.g. with safety roof hooks complying with EN 517. Up to three ladders can be linked without the need for additional safety roof hooks.

**Recommended accessories:**




Safety roof hook type A for slate  
Page 101




Safety roof hook type A for tiles and pantiles and other roofing types  
Page 101



Safety roof hook type A for plain tiles  
Page 101



Connection plates for a flange connection between the ladder sections  
Page 101



Anti-lift device  
Page 102



Chimney tread set  
Page 101



Protection-KIT  
Page 102

# WINDOW CLEANER'S LADDER

- Compact and lightweight design.
- Sturdy screwed stile-rung connection.
- Comfortable setting up the ladder with wall rollers.
- Precise ladder positioning that reduces surface wear thanks to rubber rest.

**Features:**

- Including locking levers to interlock the assembled ladder.
- Maximum permissible standing height 5.00 m.



	2-section set	3-section set	4-section set	Single lower section (for length adjustment)	Single lower section	Single middle section	Single upper section	Single upper section
	1x501705 +1x501708	1x501705 +1x501805 +1x501708	1x501705 +2x501805 +1x501708					
<b>Number of rungs</b>	13	18	23	2	5	5	6	8
<b>Stile</b> (approx. mm)	73	73	73	73	73	73	73	73
<b>Length</b> (approx. m)	4.30	5.70	7.10	0.90	1.70	1.70	2.30	2.90
<b>Standing height</b> (approx. m)	2.44	3.79	4.86					
<b>Reach height</b> (approx. m)	4.44	5.79	6.86					
<b>Width</b> top/bottom (approx. mm)	110/845	110/845	110/845	350/845	350/845	350/435	110/435	110/435
<b>Weight</b> (approx. kg)	12.9	17.6	22.3	3.3	5.5	4.7	6.0	7.4
<b>Order no.</b>	501713	501718	501723	501702	501705	501805	501716	501708

**Recommended accessories:**



Add-on steps for window cleaner's ladder  
Page 90

3049

# ORCHARD LADDER

- Highly stable thanks to foldable, transport-optimised supports.
- Stability on soil thanks to spikes.
- Exact alignment of the ladder using a spirit level.

**Features:**


- Adjustment range for supports 280 mm.
- Length of aluminium spikes 70 mm.

DIN  
4567-1

Max.  
120 kg

10  
YEAR  
GUARANTEE

★ ★ ★  
MADE IN  
GERMANY



Number of rungs	12	14
Stile (approx. mm)	60	60
Length (approx. m)	3.60	4.16
Standing height (approx. m)	2.23	2.77
Reach height (approx. m)	4.23	4.77
Width (approx. mm)	355	355
Weight (approx. kg)	10.7	12.1
Order no.	304912	304914

Note: Use only on natural soil.

**Recommended accessories:**



Handrail  
Page 99


3050

# ORCHARD LADDER, TWO-SECTION

- Highly stable thanks to foldable, transport-optimised supports.
- Stability on soil thanks to spikes.
- Exact alignment of the ladder using a spirit level.

## Features:

- Adjustment range for supports 280 mm.
- Length of aluminium spikes 70 mm.



DIN  
4567-1

Max.  
120 kg



10  
YEAR  
GUARANTEE

★ ★ ★  
MADE IN  
GERMANY

Number of rungs	2×10	2×12
Stile top/bottom (approx. mm)	60/60	60/60
Number of rungs at max. extension	18	22
Length retracted/extended (approx. m)	3.04/5.28	3.60/6.40
Standing height (approx. m)	3.85	4.93
Reach height (approx. m)	5.85	6.93
Width extended top/bottom (approx. mm)	355/355	355/355
Weight (approx. kg)	16.4	19.8
Order no.	305020	305024

Note: Use only on natural soil.  
Multi-section orchard ladders may only be leaned on when extended!

# FUELLING LADDER

- Comfortable and safe standing for longer periods of work thanks to the large platform.
- Height adjustable in 280 mm steps. Quick and easy thanks to the integrated cable winch.
- Enhanced fall protection thanks to optional protection cage.
- Effortless manoeuvring thanks to fixed and swivel castors.

**Features:**

- Platform dimensions 1,000 x 600 mm.
- Guardrail height above platform 1,100 mm.

EN  
131-7

Max.  
150 kg  
↓

10  
YEAR  
GUARANTEE

★ ★ ★  
MADE IN  
GERMANY



Dimensions	
Total height min. (approx. m)	3.79 <sup>(1)</sup> /3.83 <sup>(2)</sup>
Total height max. (approx. m)	5.12 <sup>(1)</sup> /5.16 <sup>(2)</sup>
Total length min. <sup>(3)</sup> (approx. m)	2.42
Total length max. <sup>(3)</sup> (approx. m)	2.87
Total width (approx. m)	1.59
Platform height min. (approx. m)	2.66 <sup>(1)</sup> /2.70 <sup>(2)</sup>
Platform height max. (approx. m)	3.99 <sup>(1)</sup> /4.03 <sup>(2)</sup>
Platform length (approx. mm)	1,000
Platform width (approx. mm)	600
Guardrail height (approx. mm)	1,100
Tensile load of rope winch with transfer (kg)	300.0
Mobile cross-beam (approx. m)	1.00
Chassis length (approx. m)	2.20
Permissible load (kg)	150.0
<b>Weight without basket (approx. kg)</b>	<b>263.0</b>
Order no.	228001

<sup>(1)</sup> with castor diameter 160 mm  
<sup>(2)</sup> with castor diameter 200 mm  
<sup>(3)</sup> without basket

**Mandatory castor module**

Castor diameter (mm)

**Content of the set**

Order no.



small

160

2 fixed castors (unbraked) and 2 swivel castors with StopFix

0055221




large

200

2 fixed castors (unbraked) and 2 swivel castors with StopFix

0055222



**Optional basket module**


Protective cage dimensions (mm)

Order no.

round

Ø 1,300


0055232



small

1,260x1,190

0055212



large

2,500x1,190

0055213



---

# LADDER ACCESSORIES AND SPARE PARTS

- 090 Accessories – Safe stand
- 095 Accessories – Suspending and hooking
- 096 Accessories – Wall
- 097 Accessories – For moving
- 099 Accessories – Hold
- 100 Accessories – Safety and comfort
- 101 Accessories – For roofs
- 103 Spare parts – Feet and shoes
- 105 Spare parts – Covers
- 106 Spare parts – Cross-beams and foot extensions
- 108 Spare parts – Hinges and fittings
- 112 Spare parts – Ropes, rope attachments and straps
- 113 Spare parts – Tool trays and platform
- 114 Spare parts – Orchard ladders
- 115 Spare parts – Window cleaner's ladders
- 116 Spare parts – Platform ladders

# ACCESSORIES – SAFE STAND



## Add-on steps for rung ladders

- For retrofitting to rung ladders with flanged rungs.
- Self assembly by using tools.
- Including fastening material.

For type	4011+4023+4046+4047+4123	
	+6011+6023+6046+6047	
Quantity (pieces)	3	1
Step width (mm)	285	285
For rung dimensions (mm)	30×30	30×30
For ladder inner width of at least (mm)	290	290
Weight (approx. kg)	1.0	0.3
Order no.	0055318	0055324



## Add-on steps for window cleaner's ladder

- For retrofitting to window cleaners' ladders with screwed-on rungs.
- Self assembly by using tools.
- Including fastening material.

For type	5017+5018		
Quantity (pieces)	3	1	1
Step width (mm)	2×285+1×300	285	300
For rung dimensions (mm)	30×31	30×31	30×31
For ladder inner width of at least (mm)	290	290	290
Weight (approx. kg)	0.9	0.3	0.3
Order no.	0055317	0055325	0055326



## Hang-on step for rung ladders

- Step width 300 mm, step depth 255 mm.
- Permissible load 150 kg.

For rung dimensions (mm)	30×30
For ladder inner width of at least (mm)	290
For rung distance (mm)	280
Weight (approx. kg)	0.8
Order no.	005411



## Folding universal ladder step

- Safe standing space on the ladder thanks to step surface located over the middle of the rung.
- The fold-up step ensures safe ascent of the ladder.
- Step width 260 mm, step depth 250 mm.
- Permissible load 150 kg.

For rung dimensions (mm)	30×30
For ladder inner width of at least (mm)	290
For rung distance (mm)	280
Weight (approx. kg)	1.1
Order no.	0050378



## Set of foot pikes for stiles

- 70 mm tip length according to legislation.
- Adjustable on the stile.
- Self assembly, no tools required.
- Content: 2 foot pikes incl. fastening material.

For stile size (approx. mm)	60–89
Weight (approx. kg)	0.5
Order no.	0051222



## Set of foot pikes for cross-beams

- Sturdy design.
- Swivelling.
- Self assembly by boring.
- Content: 2 foot pikes incl. fastening material.

For type	4011+4043+4045
	+4046+4047+4051
	+4061+4143
For cross-beam sections (approx. mm)	49×30+60×22+60×30
Weight (approx. kg)	0.5
Order no.	0050538



# ACCESSORIES – SAFE STAND



## Set of foot pikes for cross-beams with round cross-beam shoes

- Swivelling.
- Self assembly, no tools required.
- Content: 2 foot pikes incl. fastening material.

For type and number of rungs/steps

6045+6047+6847  
+6011/12-22+6046/2x8-2x18  
+8512/12-18+8912/12-16

Weight (approx. kg)

0.4

Order no.

0053761



## Set of swivelling foot pikes for telescopic ladders

- Self assembly, no tools required.
- Content: 2 foot pikes incl. fastening material.

For type

4142+8042+8142

Weight (approx. kg)

0.8

Order no.

0051952



## Set of folding feet with non-slip rubber coating

- Self assembly by boring and using tools.
- Content: 2 folding feet incl. fastening material.

For stile size (approx. mm)

60–100

Weight (approx. kg)

0.4

Order no.

0052054



## Rubber ladder shoes set

- Self assembly by using tools.
- Content: 2 shoes incl. fastening material.

For stile size (approx. mm)

60

73

Weight (approx. kg)

0.2

0.2

Order no.

0052764

0053194



## Safety feet, height adjustable for telescopic leaning ladder

- Approved for 150 kg, according to EN 131.
- Max. adjustable up to 220 mm.
- Self assembly by using tools.
- Incl. extension kit for the folding stabiliser.

For type

8014

Weight (approx. kg)

2.5

Order no.

0055529



# ACCESSORIES – SAFE STAND



## Retrofit kit telescopic stabilisers for leaning, extension and rope-operated extension ladders

- For retrofitting ladders without cross-beam (up to and including 2017 model year).
- Self assembly by boring and using tools.
- Content: 2 stabilisers incl. fastening material.

For type	4011+6011+4046 +6046+6051+6261
Weight (approx. kg)	2,0
Order no.	0055181



## Retrofit kit foldable stabilisers for telescopic ladder

- Self assembly by boring and using tools.
- Content: 2 stabilisers incl. fastening material.

For type	8042
Weight (approx. kg)	1.3
Order no.	0055189



## Foot extension for rung ladders

- Infinitely adjustable.
- Self assembly, no tools required.
- Including fastening material.

For stile size (approx. mm)	60	66	71	79/83	89	100
Adjustment range (approx. mm)	600	600	600	600	600	600
Weight (approx. kg)	1.7	1.7	1.8	2.0	2.0	2.2
Order no.	005550	005551	005552	005553	0050149	005554



## Foot extension set for rung ladders, double-sided accessible / spare part for stairway ladder

- Numerous possible uses on all stairway types.
- Robust locking device.
- Infinitely adjustable.
- Self assembly, no tools required.
- Content: 2 extensions incl. fastening material.

For type	4023+6023	4023+6023
For number of rungs	2x5–2x12	2x5–2x12
For stile size (approx. mm)	60x24	60x24
Length (approx. mm)	740	1,370
Adjustment range (approx. mm)	370	1,000
Weight (approx. kg)	3,0	5,0
Order no.	0053229	0050376



## Foot extension for telescopic ladders

- Infinitely adjustable from size 4x4.
- Restrictions on use for size 4x3 i.e. cannot be pushed up. In this case, the foot extension must be removed.
- Self assembly, no tools required.
- Including fastening material.

For type	4142+8042+8142
Adjustment range (approx. mm)	450
Weight (approx. kg)	1.0
Order no.	0050302



# ACCESSORIES – SAFE STAND



## Foot extension for cross-beams

- For all current rung leaning ladders with cross-beams.
- Can be used with straight and curved cross-beams.
- Infinitely adjustable.
- An open-ended spanner is required for the first installation, then can be used without tools.
- Including fastening material.

For stile size (approx. mm)	60–89
For cross-beam sections (approx. mm)	50×22+50×30+60×22
Adjustment range (approx. mm)	450
Weight (approx. kg)	1.2
Order no.	005650



## Foot extension for wooden ladders

- Self assembly, no tools required.
- Including fastening material.

For type	71410+71499
Length (approx. mm)	1,500
Adjustment range (approx. mm)	700
Weight (approx. kg)	1.7
Order no.	0079640



## Cross-beam for ladder section

- Not for ladders with folding foot.
- Cross-beam tube dimensions 60.4 × 22.0 mm.
- Self assembly by using tools.
- Including fastening material.

For stile size (approx. mm)	50–100
For ladder inner width (mm)	294+300+362+370 +430+440+500
Length (approx. mm)	800      1,200
Weight (approx. kg)	1.0      1.2
Order no.	0054062      0054063



## Universal cross-beam for all current leaning, extension and rope-operated extension ladders without folding foot

- Increases the stability of the ladder.
- Level compensation up to approx. 350 mm.
- Infinitely adjustable.
- With swivelling steel pikes as standard, 70 mm long.
- Self assembly, no tools required.
- Including fastening material.

For stile size (approx. mm)	60–100
Cross-beam width (approx. mm)	910
Weight (approx. kg)	3.7
Order no.	0050766



## Curved cross-beam for step extension ladder, two-section

- For increased ground clearance and more adaptability.
- Self assembly by using tools.
- Including fastening material.

For type	4846
For number of rungs/steps	2×8      2×12      2×14
Length (approx. mm)	876      1,056      1,075
Weight (approx. kg)	1.2      1.4      1.4
Order no.	0055628      0055629      0055630




# ACCESSORIES – SAFE STAND



## Clamp fitting set for stairway adjustment

- The upper ladder section is reversed and clamped to the lower end of the middle ladder section. This creates a freestanding ladder with an extending ladder leg for use on stairs.
- Ensure that there is at least two rungs off set between support section and front ladder section.
- Self assembly, no tools required.
- Content: 2 sets of clamp fittings incl. fastening material.



For rung dimensions (mm)	30×30
For ladder inner width of at least (mm)	300
Weight (approx. kg)	0.9
Order no.	0054489



## Extension set for HYMER ProTect Stabilisers set for HYMER ProTect

- Assemble the telescopic platform ladder in a few simple steps.
- Simply reposition the wheels and plug in the extension set.
- Self assembly, no tools required.



	Stabilisers set	Extension set		
Number of rungs	–	2×3	2×4	2×5
Weight (approx. kg)	4.4	6.1	7.3	8.5
Order no.	0054734	0054730	0054731	0054732

ProTect	+ Stabilisers set (1 pair)	+ Extension set (2 elements)		
		each with 3 rungs	each with 4 rungs	each with 5 rungs
848303	also required	Standing height: 0.86-1.10 m Reach height: 2.86-3.10 m	Standing height: 1.10-1.32 m Reach height: 3.10-3.32 m	not possible
848304	already included	Standing height: 0.93-1.32 m Reach height: 2.93-3.32 m	not possible	not possible
848305	already included	Standing height: 1.16-1.56 m Reach height: 3.16-3.56 m	Standing height: 1.16-1.79 m Reach height: 3.16-3.79 m	Standing height: 1.16-2.02 m Reach height: 3.16-4.02 m
848306	already included	Standing height: 1.39-1.79 m Reach height: 3.39-3.79 m	Standing height: 1.39-2.02 m Reach height: 3.39-4.02 m	Standing height: 1.39-2.25 m Reach height: 3.39-4.25 m
848307	already included	Standing height: 1.63-2.02 m Reach height: 3.63-4.02 m	Standing height: 1.63-2.25 m Reach height: 3.63-4.25 m	Standing height: 1.63-2.49 m Reach height: 3.63-4.49 m
848308	already included	Standing height: 1.86-2.25 m Reach height: 3.86-4.25 m	Standing height: 1.86-2.49 m Reach height: 3.86-4.49 m	not possible
Order no.	0054734	0054730	0054731	0054732


# ACCESSORIES – SUSPENDING AND HOOKING



## Suspension hook set

- For ladders with stile dimensions from 60 mm to 83 mm.
- Self assembly by using tools.
- Content: 2 hooks incl. fastening material.

Hook size (approx. mm)	30	60	100
Material	Galvanised steel		
Weight (approx. kg)	0.4	0.6	0.7
Order no.	0054013	0054014	0054015



## Suspension set

- For ladders with mounted suspension hooks (suspension hooks not included in the suspension set).
- Self assembly by using tools.
- Content: 2 suspensions.

For hook diameters (mm)	30+35+60+100
Connection plate height (approx. mm)	90
Distance borehole (approx. mm)	65
Weight (approx. kg)	0.4
Order no.	0054835



## Flat hook set

- For ladders with stile dimensions from 60 mm to 83 mm.
- Self assembly by using tools.
- Content: 2 hooks incl. fastening material.


Clear width (approx. mm)	60	100	150
Material	Galvanised steel		
Weight (approx. kg)	0.4	0.6	0.8
Order no.	0054016	0054017	0054018



## Ledge rest set

- For ladders with stile dimensions from 60 mm to 83 mm.
- Self assembly by using tools.
- Content: 2 ledge rests incl. fastening material.

Length (approx. mm)	100
Material	Galvanised steel
Weight (approx. kg)	0.2
Order no.	0054019



## Wall bracket set for ladders

- For secure hooking of ladders.
- Lockable by customer locks.
- Maximum load per holder = 25 kg (per set = 50 kg).
- Content: 2 wall brackets.

Inside dim. D x H (approx. mm)	250x300
Material	Hot-dip galvanized steel
Weight (approx. kg)	3.6
Order no.	004178



# ACCESSORIES – WALL



## Set of wall rollers

- Self assembly by boring and using tools.
- Content: 2 wall rollers incl. fastening material.

For stile size (approx. mm)	60–100
Roller diameter (approx. mm)	90
Weight (approx. kg)	0.4
Order no.	0054010



## Support board set for step leaning ladder

- For securing step leaning ladders against slipping.
- Self assembly by using tools. The required drill holes on the product are already pre-assembled.
- Content: 1 support board incl. fastening material.



For type	6012
Width (approx. mm)	430
Weight (approx. kg)	0.4
Order no.	0054630



## Rubber pads set for rung ladders and step ladders

- Protects susceptible surfaces.
- Reduces the risk of slipping.
- Self assembly by boring and using tools.
- Content: 2 pads incl. fastening material.



For stile size (approx. mm)	60–100
Weight (approx. kg)	0.1
Order no.	0054012



## Ladder holder set for gutters

- For gutters complying with DIN 18461.
- For securely fastening ladders to gutters.
- Can be used on all current types of ladders and stile profiles.
- The plastic coating of the clamps protect the gutters against scratches and dents.
- Self assembly, no tools required.
- Content: 2 holders incl. fastening material.

Weight (approx. kg)	0.4
Order no.	0051528



## Wall spacer for rung ladders

- Fixed wall distance of approx. 400 mm.
- Upper holder width approx. 680 mm.
- With anti-lift device.
- Can be attached without tools using hooks.

For rung dimensions (mm)	30×30
For ladder inner width of at least (mm)	290
For rung distance (mm)	280
Weight (approx. kg)	1.2
Order no.	005485



## Wall spacer for rung ladders, telescopic\* and with tool tray\*\*

- Adjustable wall clearance from 420 mm to 670 mm.
- Upper holder width min. 680 mm, max. 940 mm.
- With anti-lift device.
- With tool tray for tools.
- Depth of tool tray 240 mm.
- Permissible tool tray load 15 kg.
- Can be attached without tools using hooks.

For rung dimensions (mm)	30×30
For ladder inner width of at least (mm)	290
For rung distance (mm)	280
Weight (approx. kg)	2.2
Order no.	0051248





# ACCESSORIES – FOR MOVING



**A**

## Set of spring-loaded castors, self-locking for step ladders and platform ladders

- On 8024+8026+8074+8624+8626 only in connection with rigid safety bars set (must be ordered as an accessory). On 8080, rigid safety bars fitted on product as standard.
- Note 8024+8074+8624: To ensure users feel safe, spring-loaded castors should only be installed up to size 2x8.
- Note 8026+8080+8626: It is recommended to fit spring-loaded castors depending on the sense of safety of the user but only up to size 6. For greater heights we recommend the use of tip and roll wheels (see below 'set of tip and roll wheels', order no. 0052316).
- Castor diameter 75 mm.
- Self assembly by boring and using tools.
- Content: 2 castors incl. fastening material.



**B**

For type	8024+8026+8074 +8080+8624+8626	8024+8026+8074 +8080+8624+8626	8026+8080+8626	8026+8080+8626
Content	2 castors unbraked	1 braked castor + 1 unbraked castor	2 castors unbraked	2 castors unbraked
Spring-loaded castor type	<b>fixed to ladder section A</b>	<b>swivelling on ladder section B</b>	<b>fixed to support section</b>	<b>swivelling on support section</b>
Weight (approx. kg)	1.1	1.3	1.1	1.1
Order no.	0054646	0054647	0054648	0054649



## Set of tip and roll wheels for step ladders with platform and platform ladders / spare part for platform ladders

- On 8026+8078+8626 an additional safety bars set is recommended (must be ordered as an accessory). On 8080, rigid safety bars fitted as standard to product.
- Self assembly by using tools.
- Content: 2 tip and roll wheels incl. fastening material.

For type	8026+8078+8080+8626
Weight (approx. kg)	0.6
Order no.	0052316



## Castors set for telescopic ladders

- Rubber-covered castors for comfortable moving of telescopic ladders.
- Self assembly by using tools.
- Content: 2 castors incl. fastening material.

For type	4142+8042+8142
Weight (approx. kg)	0.4
Order no.	008953




# ACCESSORIES – FOR MOVING



## Rigid safety bars set, detachable for step ladders

- Self assembly by boring and using tools.
- Content: 2 safety bars incl. fastening material.



For type and number of steps	8024/ 2×3	8024/ 2×4+2×5	8024/ 2×6+2×7	8024/ 2×8-2×10	8024/ 2×12
	8074/ 2×3	8074/ 2×4+2×5	8074/ 2×6+2×7	8074/ 2×8+2×10	8074/ 2×12
	8624/ 2×3	8624/ 2×4+2×5	8624/ 2×6+2×7	8624/ 2×8-2×10	8624/ 2×12
	-	8026/ 4+5	8026/ 6+7	8026/ 8+10	8026/ 12+14
	-	8626/ 4+5	8626/ 6+7	8626/ 8+10	8626/ 12+14
Length (approx. mm)	259	550	709	1,009	1,329
Weight (approx. kg)	0.4	0.6	0.8	1.1	1.5
Order no.	0054021	0054022	0054023	0054024	0054025




## Rigid safety bars set for platform ladder / spare parts set rigid safety bars for platform ladders

- Self assembly by using tools.
- Content: 2 rigid safety bars incl. fastening material.



For type and number of steps	8078/ 04+05	8078/ 06+10	8078/ 08
Length (approx. mm)	500	659	840
Weight (approx. kg)	0.3	0.4	0.5
Order no.	0055493	0055494	0055495

# ACCESSORIES – HOLD



## Handrail

- For retrofitting to ladders with rectangular stiles.
- Distance between stile and handrail approx. 150 mm.
- Special aluminium tube, Ø 30 mm, with T-slot for variable mounting of the holders.
- Self assembly by boring and using tools.
- Including 2 holders and fastening material.

For stile size (approx. mm)	60–100	60–100
Length (approx. mm)	1,250	2,500
Weight (approx. kg)	1.1	1.9
Order no.	0051400	0051401
For stile size (approx. mm)	60–100	60–100
Length (approx. mm)	3,750	5,000
Weight (approx. kg)	2.7	3.6
Order no.	0051402	0051403



## Back protection door, self-closing for stockers' ladders

- Stockers' ladders 6888+6889 are prepared for retrofitting the back protection door.
- Self assembly by using tools.
- Including fastening material.

For type	6888+6889		
Access width (approx. mm)	600		
Height (approx. mm)	420		
Weight (approx. kg)	1.3		
Order no.	0054880		



## Handrail for stockers' ladders

- Stockers' ladders 6888+6889 are prepared for retrofitting the handrail.
- Handrail diameter 30 mm.
- Self assembly by using tools.
- Including fastening material.

For type	6888+6889		
For number of steps	4+5	6+7	8
Weight (approx. kg)	0.6	0.7	1.0
Order no.	0051777	0051778	0051780



## Retaining bracket for step ladder

- Self assembly by using tools. The required drill holes on the product are already pre-assembled.
- Including fastening material.

For type	6024		
Weight (approx. kg)	0.8		
Order no.	0051483		



## ACCESSORIES – SAFETY AND COMFORT



### Tool bag for aluminium and wooden ladders / spare part for wooden step ladder

- Made of high-quality cotton.
- Bag closed at the sides.
- Self assembly by using hook-and-loop fasteners.
- Permissible load 5 kg.

Weight (approx. kg)	0.1
Order no.	0054030



### Bucket hook for rung ladders

- Permissible load 25 kg.

Weight (approx. kg)	0.2
Order no.	0054008



### Anti-static strap

- For avoiding electrostatic charging of ladders in potentially explosive areas.
- Self assembly by using tools.
- Including fastening material.


Weight (approx. kg)	0.1
Order no.	0052526



### Ladder bracket set for roof racks

- Quick, safe fastening and securing of ladders on carriers and heavy-load cages.
- Equipped with locks, so that the ladders are protected against theft.
- Content: 2 ladder brackets and 1 pair of keys.

Weight (approx. kg)	2.6
Order no.	0055008






## Chimney tread set

- For clay roof tiles, concrete roof tiles and large-surface tiles, with hooks.
- Adjustable about 4° each, for roof inclinations from 15° to 60°.
- Permissible load 150 kg.
- Content: 2 universal stand supports and 1 tread 800 mm long incl. fastening material.

Colour	galvanised	RAL 8004 brick red coated	RAL 8014 sepia brown coated	RAL 7016 anthracite coated
Width of tread (mm)	250	250	250	250
Weight (approx. kg)	8,0	8,0	8,0	8,0
Order no.	008927	008928	008929	008930



## Connection plates for a flange connection between the ladder sections

- Self assembly by using tools.
- 2 pieces incl. screws.

Weight (approx. kg)	0,5
Order no.	005907



## Safety roof hook type A for slate

- The roof hooks may only be fastened to rafters or equivalent loading roof elements.
- Self assembly by using tools.
- Including fastening nails.

Colour	galvanised
Weight (approx. kg)	1,0
Order no.	0054651



## Safety roof hook type A for tiles and pantiles and other roofings

- The roof hooks may only be fastened to rafters or equivalent loading roof elements.
- Self assembly by using tools.
- Including fastening nails.

Colour	galvanised	RAL 8004 brick red coated	RAL 8014 sepia brown coated	RAL 7016 anthracite coated
Weight (approx. kg)	1,2	1,2	1,2	1,2
Order no.	0054652	0054653	0054654	0054655




## Safety roof hook type A for plain tiles

- The roof hooks may only be fastened to rafters or equivalent loading roof elements.
- Self assembly by using tools.
- Including fastening nails.

Colour	galvanised	RAL 8004 brick red coated
Weight (approx. kg)	1,2	1,2
Order no.	0054656	0054657

## ACCESSORIES – FOR ROOFS



### Anti-lift device

- Self assembly, no tools required.
- Including fastening material.

Weight (approx. kg)	0.1
Order no.	008940



### Protection-KIT for roof ladders

- To protect the roofing and ladder.
- Content: 2 adhesive strips.

For type	4092+4093+4095+4096
Dim. LxWxH (approx. mm)	1,950x20x3
Material	rubber (EPDM)
Weight (approx. kg)	0.2
Order no.	0055610

# SPARE PARTS – FEET AND SHOES



## Ladder foot set

- Self assembly by using tools.
- Content: 2 feet incl. fastening material.

For stile size (approx. mm)	60	66	71	
Weight (approx. kg)	0.1	0.1	0.1	
Order no.	0053474	0053475	0053477	
For stile size (approx. mm)	79	83	89	100
Weight (approx. kg)	0.1	0.2	0.2	0.2
Order no.	0053478	0053479	0053480	0053481



## Ladder foot set for support section

- Self assembly by using tools.
- Content: 2 feet.

For type	6026+8026+8078+8080+8081+8226 +8580+8626+8681
For stile size (approx. mm)	45
Weight (approx. kg)	0.1
Order no.	0053473



## Ladder foot set, angled

- Self assembly by using tools.
- Content: 2 feet incl. fastening material.

For type	6023+8024+8026+8074+8080+8081 +8224+8226+8580+8624+8626+8681		
For stile size (approx. mm)	60	71	89
Weight (approx. kg)	0.2	0.2	0.2
Order no.	0054623	0054626	0054628



## Ladder shoes set for step ladders

- Self assembly by using tools.
- Content: 2 shoes.

For type	4024+4026	4026+4126
	+4124+4126	
Use	on ladder section	on support section
Weight (approx. kg)	0.2	0.1
Order no.	0053220	0053221



## Ladder shoes set for telescopic ladders

- Self assembly by using tools.
- Content: 1 left shoe and 1 right shoe incl. fastening material.

For type	4142+8042+8142
Weight (approx. kg)	0.2
Order no.	0053486



# SPARE PARTS – FEET AND SHOES



## Ladder shoes set for step ladders

- Self assembly by using tools.
- Content: 1 left shoe and 1 right shoe incl. fastening material.

For type	6012+6024+6026	
For stile size (approx. mm)	81	
Weight (approx. kg)	0.2	
Order no.	0053487	



## Rubber shoes set

- Self assembly by using tools.
- Content: 2 shoes incl. fastening material.


For stile size (approx. mm)	60	73
Weight (approx. kg)	0.2	0.2
Order no.	0052764	0053194



## Cross-beam shoes set for straight cross-beams

- Self assembly by using tools.
- Content: 2 shoes incl. fastening material.

For type and number of rungs	4011/12-18+4043+4045+4046+4047 +4051+4061+4143+4846+5017/02+05	
For cross-beam sections (approx. mm)	60×22	
Weight (approx. kg)	0.2	
Order no.	0053483	



## Round cross-beam shoes set for curved cross-beams

- Self assembly by using tools.
- Content: 2 shoes incl. fastening material.

For type and number of rungs/steps	6011/12-22+6045 +6046/2×8-2×18+6047 +6847+8512/12-18 +8912/12-16	0050766
For cross-beam sections (approx. mm)	60×22	49×30
Weight (approx. kg)	0.3	0.3
Order no.	0053482	0054634





# SPARE PARTS – COVERS



## Spare parts set covers

- Self assembly by using tools.
- Content: 2 covers.

For stile size (approx. mm)	60	66	71
Weight (approx. kg)	0.3	0.3	0.3
Order no.	0053205	0053206	0053207




For stile size (approx. mm)	79	83	89
Weight (approx. kg)	0.3	0.3	0.3
Order no.	0053208	0053209	0053210



## Spare parts set stile covers for leaning step ladder

- Self assembly by using tools.
- Content: 2 covers incl. fastening material.

For type	6012
Weight (approx. kg)	0.1
Order no.	0054832



## Spare parts set hinge covers for step ladders with platform and platform ladders

- Self assembly, no tools required.
- Content: 2 hinge covers.

	6026	8026+8078
For type		+8080+8081
		+8226+8580
		+8626+8681
Weight (approx. kg)	0.1	0.1
Order no.	0054963	0054964



## Spare parts set rung covers for telescopic ladders

- Self assembly, no tools required.
- Content: 2 covers for rungs with locking device and 10 covers for rungs without locking device.

For type	4142+8042+8142
Weight (approx. kg)	0.1
Order no.	0054047



# SPARE PARTS – CROSS-BEAMS AND FOOT EXTENSIONS



## Spare parts set cross-beam

- Profile dimensions 60 × 22 mm.
- Self assembly by using tools.
- Content: 1 cross-beam incl. fastening material.



For type and number of rungs	4011/12	4011/14+16	4011/18	–	4046/2x10+2x12	–	–	–	4046/2x14–2x16
	4143/4x3	4043/4x4	–	4045/2x8	4045/2x10+2x12	4047/3x7–3x9	4047/3x10–3x12	4047/3x14	4051/2x14–2x20
For stile size (approx. mm)	–	–	–	4846/2x8	4846/2x10+2x12	–	–	4061/3x12–3x16	4846/2x14
Cross-beam length (approx. mm)	60	60/66	60/66	60	66/71	60/66/71	71	83/89	83/89
Weight (approx. kg)	697	810	921	750	948	1,005	1,200	1,200	1,200
Order no.	0.9	1.2	1.2	1.0	1.2	1.4	1.5	1.5	1.5
	0053476	0053498	0053499	0053501	0053502	0053651	0055190	0054064	0053704



## Spare parts set curved cross-beam

- Self assembly by using tools.
- Content: 1 cross-beam incl. fastening material.



For type and number of rungs	6011/12–18	6011/20+22	–	–	–	–	–	–
	6045/2x6–2x12	–	6047/3x6–3x8	6045/2x14	–	6047/3x9+3x10	6047/3x12+3x14	–
	6046/2x8–2x12	–	6847/3x6+3x7	6046/2x14	6046/2x16+2x18	6847/3x8–3x10	–	–
	8512/12+14+16+18	–	–	–	–	–	–	–
	8912/12+14+16	–	–	–	–	–	–	–
For stile size (approx. mm)	60/66/71	71	60/66/71	83	89	83	89	89
Cross-beam length (approx. mm)	1,040	1,141	1,031	1,160	1,285	1,160	1,285	–
Weight (approx. kg)	1.4	1.5	1.3	1.6	2.0	1.6	2.0	–
Order no.	0052961	0055109	0052958	0053778	0055114	0053542	0053785	–



## Foot extension set for rung ladders, double-sided accessible / spare part for stairway ladder

- Numerous possible uses on all stairway types.
- Robust locking device.
- Infinitely adjustable.
- Self assembly, no tools required.
- Content: 2 extensions incl. fastening material.

For type	4123	4123
For stile size (approx. mm)	60x24	60x24
Length (approx. mm)	740	1,370
Adjustment range (approx. mm)	370	1,000
Weight (approx. kg)	3.0	5.0
Order no.	0053229	0050376



# SPARE PARTS – CROSS-BEAMS AND FOOT EXTENSIONS



## Spare parts set star grip for foot extensions for stairway ladders

- Self assembly by using tools.
- Content: 1 star grip nut and 1 thrust piece incl. fastening material.

For type	4123
Weight (approx. kg)	0.2
Order no.	0054103



## Spare parts set fastening material for foot extension

- Self assembly by using tools.
- Content: 4 clamping plates, 1 connecting rod and 2 conical grips incl. screws.

Use	0050302
Weight (approx. kg)	0.3
Order no.	0054825



# SPARE PARTS – HINGES AND FITTINGS



## Spare parts set hinges for combination ladders

- Self assembly by using tools.
- Content: 2 hinges incl. fastening material.



For type and number of rungs	–	–	–	4047/ 3x9-3x11	4047/ 3x12+3x14
	6045/ 2x6+2x8	6045/ 2x10	6045/ 2x12	6045/ 2x14	–
	6047/ 3x6	6047/ 3x7	6047/ 3x8	6047/ 3x9+3x10	6047/ 3x12+3x14
	–	6847/ 3x6+3x7	–	6847/ 3x8-3x10	–
For stile size (approx. mm)	60x24	66x24	70x24	83x24	89x24
Weight (approx. kg)	0.3	0.3	0.3	0.4	0.4
Order no.	0054965	0054966	0054967	0054969	0054970



## Spare parts set hinge plates for combination ladders

- Self assembly by using tools.
- Content: 1 right hinge plate and 1 left hinge plate incl. fastening material.

For type and number of rungs	4045/ 2x8	4045/ 2x10	4045/ 2x12
	–	4047/ 3x7	4047/ 3x8
For stile size (approx. mm)	60x24	66x24	70x24
Weight (approx. kg)	0.5	0.5	0.5
Order no.	0054971	0054972	0054973



## Spare parts set hinges for step ladders

- Self assembly by using tools.
- Content: 2 hinges incl. fastening material.


For type	4024+4124
Weight (approx. kg)	0.5
Order no.	0052872



## Spare parts set hinges for step ladders

- Self assembly by using tools.
- Content: 2 hinges incl. fastening material.

For type	8024+8074+8224+8624
Weight (approx. kg)	0.7
Order no.	0053864



## Spare parts set hinges for wooden ladders

- Self assembly by using tools.
- Content: 2 hinges incl. fastening material.

For type	71410	71499
	+71499 to version 11/2020	from version 12/2020
Weight (approx. kg)	0.5	0.9
Order no.	008968	008966



# SPARE PARTS – HINGES AND FITTINGS



## Spare parts set position adaptor for wooden ladders

- Self assembly by using tools.
- Content: 2 position adaptors incl. fastening material.



For type	71410
	+71499 to version 11/2020
Material	Steel
Weight (approx. kg)	0.1
Order no.	008969



## Spare parts set position adaptor for wooden step ladder

- Self assembly by using tools.
- Content: 2 position adaptors incl. fastening material.

For type	71499 from version 12/2020
Material	Plastic
Weight (approx. kg)	0.1
Order no.	008962



## Spare parts set hinges for rung ladders

- Self assembly by using tools.
- Content: 2 hinges incl. fastening material.

For type	4023+6023	
For stile size (approx. mm)	60	71
Weight (approx. kg)	0.5	0.5
Order no.	0054045	0054046




## Platform support repair set for step ladders with platform

- Self assembly by using tools.
- Content: 2 safety platform lifter incl. fastening material.

For type	4026+4126+6026
Weight (approx. kg)	0.5
Order no.	0053991



# SPARE PARTS – HINGES AND FITTINGS



## Spare parts set steel fitting at top for combination and extension ladders without rope-pull

- If required, please specify: ladder type, number of rungs, ladder inner width, stile dimensions of cross-section, year of manufacture.
- Content: 1 fitting incl. fastening material.



## Spare parts set steel fitting at top for rope-operated extension ladders, two-section and three-section

- If required, please specify: ladder type, number of rungs, ladder inner width, stile dimensions of cross-section, year of manufacture.
- Content: 1 fitting incl. fastening material.



## Spare parts set S-hooks for extension and combination ladders

- Self assembly by using tools.
- Content: 1 S-hook with lock and 1 S-hook without lock incl. fastening material.

For rung dimensions (mm)	30x30
Weight (approx. kg)	0.2
Order no.	0054049



## Spare parts set self-locking hook for rope-operated extension ladders

- Self assembly by using tools.
- Content: 1 self-locking hook incl. fastening material.



For type / use	4051	–	6051	–
	4061/ middle section	4061/ lower section	6261/ middle section	6261/ lower section
Weight (approx. kg)	0.3	0.3	0.3	0.3
Order no.	0054096	0054097	0054098	0054099

# SPARE PARTS – HINGES AND FITTINGS




## Rigid safety bar for combination ladders

- Self assembly by using tools.
- Including fastening material.



For type and number of rungs	4047/ 3x7+3x8	4047/ 3x9+3x10	4047/ 3x11	4047/ 3x12+3x14
Length (approx. mm)	–	6047/ 3x7–3x10	–	6047/ 3x12+3x14
Length (approx. mm)	528 (angled)	528	913	1,307
Weight (approx. kg)	0.2	0.2	0.3	0.4
Order no.	0054084	0054085	0054086	0054089



## Spare parts set rigid safety bars for step-combination ladder

- Self assembly by using tools.
- Content: 2 rigid safety bars incl. fastening material.



For type and number of rungs/steps	6847/ 3x6+3x7	6847/ 3x8+3x9+3x10
Length (approx. mm)	623	865
Weight (approx. kg)	0.7	0.9
Order no.	0055508	0055509



## Rigid safety bars set for platform ladder / spare parts set rigid safety bars for platform ladders

- Self assembly by using tools.
- Content: 2 rigid safety bars incl. fastening material.



For type and number of steps	8078/ 04+05 + 8080/ 04+05 + 8081/ 04+05 + 8580/ 04+05 + 8681/ 04+05	8078/ 06+10 + 8080/ 06+07+10 + 8081/ 06+07+10 + 8580/ 06 + 8681/ 06+07+10	8078/ 08 + 8080/ 08+09+12 + 8081/ 08+09+12 + 8681/ 08+09+12
Length (approx. mm)	500	659	840
Weight (approx. kg)	0.3	0.4	0.5
Order no.	0055493	0055494	0055495




## Spare parts set reinforced struts

- Compatible for all prevalent ladder types.
- Self assembly by using tools.
- Content: 2 reinforced struts incl. fastening material.


For type	4024+4026+6011+6023+6045+6047 +6847+8024+8026+8078+8080+8081 +8224+8512+8624+8626+8681+8912
Material	Alu
Weight (approx. kg)	0.8
Order no.	0055429

# SPARE PARTS – ROPES, ROPE ATTACHMENTS AND STRAPS



## Spare parts set safety strut

- If necessary, please specify the following: ladder type, number of rungs, dimensions of stile cross-section, year of manufacturing.
- Content: 2 restraining straps incl. fastening material.



## Plastic rope for rope-operated extension ladders

- If necessary, please specify the following: ladder type, number of rungs, ladder inner width, stile dimensions of cross-section, year of manufacture.



## Spare parts set rope holder for rope-operated extension ladders

- Self assembly by using tools.
- Content: 1 rope holder incl. fastening material.

For type	4051+4061 +6051+6261
For rung dimensions (mm)	30x30
Weight (approx. kg)	0.1
Order no.	0053215



## Spare parts set rope pulley support for rope-operated extension ladders

- Rope pulley, 70 mm diameter.
- Self assembly by using tools.
- Content: 1 rope pulley support incl. fastening material.

For type	4051+4061 +6051+6261
For rung dimensions (mm)	30x30
Weight (approx. kg)	0.2
Order no.	0054048





# SPARE PARTS – TOOL TRAYS AND PLATFORM



## Spare parts set tool tray for step ladder with platform

- Self assembly, no tools required.
- Content: 1 upper section, 1 lower section and 2 cover discs.


For type	4026
Weight (approx. kg)	0.3
Order no.	0054834



## Spare parts set tool tray for step ladders with platform and platform ladders

- Self assembly by using tools.
- Content: 1 tray profile, 1 cast part right and 1 cast part left incl. fastening material.


For type	8026+8226 +8626	8080+8081 +8580+8681
Weight (approx. kg)	0.6	0.7
Order no.	0054838	0055371



## Tool tray for platform ladders

- Self assembly by using tools.

For type	8383+8483+8484
Weight (approx. kg)	0.4
Order no.	0054709



## Tool bag for aluminium and wooden ladders / spare part for wooden step ladder

- Made of high-quality cotton.
- Bag closed at the sides.
- Self assembly using hook-and-loop fasteners.
- Permissible load 5 kg (0.05 kN).

For type	71499
Weight (approx. kg)	0.1
Order no.	0054030



## Platform for multipurpose ladder

- For size 4x3 for use as a working platform.
- Robust, non-slip platform made from plywood panels, consisting of 2 sections.
- Space-saving for transport.
- Self assembly, no tools required, with simple clicking-in.
- Including fastening material.

For type	4143
For number of rungs	4x3
Dimensions (approx. m)	1.40x0.29
Weight (approx. kg)	2.9
Order no.	0079639



# SPARE PARTS – ORCHARD LADDERS



## Spare parts set foot pikes for orchard ladders

- Content: 2 foot pikes incl. fastening material.

For type	3049+3050
Weight (approx. kg)	0.1
Order no.	0054745



## Spare parts set bracket for orchard ladders

- Self assembly by using tools.
- Content: 1 bracket incl. fastening material.

For type	3049+3050
Weight (approx. kg)	0.8
Order no.	0053196



## Safety plug for orchard ladders

For type	3049+3050
Weight (approx. kg)	0.1
Order no.	007720




## Spare parts set S-hooks for orchard ladder, two-section

- Self assembly by using tools.
- Content: 1 S-hook with lock and 1 S-hook without lock incl. fastening material.

For type	3050
Weight (approx. kg)	0.3
Order no.	0055590



# SPARE PARTS – WINDOW CLEANER'S LADDERS



## Spare parts set locking levers for window cleaner's ladder lower and middle sections

- Self assembly by using tools.
- Content: 2 locking levers incl. fastening material.

For type	5017+5018
Use	lower and middle sections
Weight (approx. kg)	0.2
Order no.	0054638



## Spare parts set support blocks for window cleaner's ladder lower and middle sections

- Self assembly by using tools.
- Content: 2 support blocks incl. fastening material.

For type	5017+5018
Use	lower and middle sections
Weight (approx. kg)	0.1
Order no.	0054637



## Spare parts set rubber rest for window cleaner's ladder upper section

- Self assembly by using tools.
- Content: 1 rubber rest incl. fastening material.

For type	5017+5018
Use	upper section
Weight (approx. kg)	0.3
Order no.	0054636



# SPARE PARTS – PLATFORM LADDERS



## Bush repair set for platform ladders

- Self assembly by using tools.
- Content: 4 clamps and 4 bush halves incl. fastening material.

For type	8483+8484
Weight (approx. kg)	0.3
Order no.	0053988



## Set of tip and roll wheels for step ladders with platform and platform ladders / spare part for platform ladders

- Self assembly by using tools.
- Content: 2 tip and roll wheels incl. fastening material.

For type	8081+8681
Weight (approx. kg)	0.6
Order no.	0052316



## Spare parts set castors for platform ladders

- Self assembly by using tools.
- Content: 2 castors incl. fastening material.

For type	8483+8484
Weight (approx. kg)	1.1
Order no.	0054665




## Spare parts set ball caps for stabilisers for platform ladders / spare parts set ball caps for machine step

- Self assembly, no tools required.
- Content: 2 caps.

For type	8483+8484	8483+8484
For version	to 03/2015	from 04/2015
Cap diameter (approx. mm)	30	28
Weight (approx. kg)	0.1	0.1
Order no.	0054760	0054954




# SPARE PARTS – PLATFORM LADDERS



## Tool tray for platform ladders

- Self assembly by using tools.

For type	8383+8483+8484
Weight (approx. kg)	0.4
Order no.	0054709



## Spare parts set handrails for platform ladders

- Self assembly by using tools.
- Content: 2 handrails incl. fastening material.

For type	8483+8484
Weight (approx. kg)	1.0
Order no.	0055236



## Spare parts set safety door for platform ladders

- Self assembly by using tools.
- Content: 2 door leaves incl. fastening material.

For type	8483+8484
Weight (approx. kg)	2.0
Order no.	0055239



# STEPS AND WORKING PLATFORMS

A full-page photograph of a worker in a warehouse. The worker is standing on a wooden step ladder, reaching up to a high shelf filled with boxes. The entire image is overlaid with a semi-transparent red filter. The worker is wearing a light-colored t-shirt and dark work pants. The shelves are labeled with numbers like 'E01B0505' and 'E01B0504'. The ladder has the brand name 'HYMER' visible on its side.

119 Steps and working platforms

136 Accessories and spare parts for steps and working platforms

# 02

---

# STEPS AND WORKING PLATFORMS

**122** Aluminium step

**123** Machine steps

**125** Step stand

**126** Industrial step

**128** Servicing and assembly step

**129** Safety steps


**133** Aluminium planks

**135** Assembly stand

# STEPS AND WORKING PLATFORMS

**Maximum stability for the harshest conditions.**


Robust, stable, durable, highly functional: The best of aluminium. Our steps, working platforms and aluminium planks ensure maximum comfort, full protection and a high safety standards for assembly and service work in industry as well as for trade crafts.




Optional accessories such as ergonomically shaped handrails for greater safety.



Comfortable and safe standing for longer periods of work thanks to the robust working area.




Non-slip, comfortable ascent thanks to large area steps.

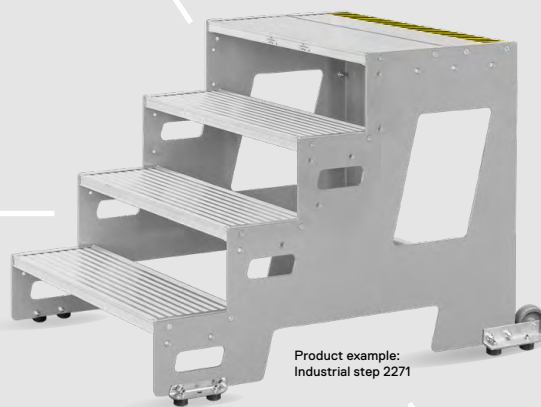

Product example:  
Industrial step 2271



High stability for heavy-duty use.



Easy to install and easy to set up.



# ACCESSORIES FOR STEPS AND WORKING PLATFORMS

Steps and working platforms have an extra-large tread and standing surface and offer a safe alternative to rung and step ladders. And to make access as ergonomic and safe as possible for our steps and work platforms, we offer a wide range of accessories such as guardrails and handrails.




**Platform railing lateral for step stand**  
See page 138

- Order no. 0054747



**Platform railing frontal for step stand**  
See page 138

- Order no. 22990030  
For step width 600 mm
- Order no. 22990031  
For step width 800 mm
- Order no. 22990032  
For step width 1,000 mm



**Handrail for step stand**  
See page 138

- Order no. 0055367  
For number of steps 2+3
- Order no. 0055366  
For number of steps 4
- Order no. 0053472  
For number of steps 5



Product example:  
Step stand 6884

# ALUMINIUM STEP

- Extremely high stability for heavy-duty use.
- Optionally available with handrail for even more work safety.

## Features:


- Step depth 232 mm.
- Shipped in single parts.

EN  
14183

Max.  
150 kg  
↓

**10**  
YEAR  
GUARANTEE

★ ★ ★  
MADE IN  
GERMANY



687536

Number of steps	2	3	4
Stile (approx. mm)	40	40	40
Standing height (height of top step) (approx. m)	0.48	0.72	0.96
Reach height (approx. m)	2.48	2.72	2.96
Step width top step (approx. mm)	585	571	556
Step width lowest step (approx. mm)	600	600	600
Overhang (approx. m)	0.68	0.95	1.21
Weight (approx. kg)	7.1	9.7	11.4
Order no.	687526	687536	687546

## Recommended accessories:



Holding device  
Page 137



Castors set  
Page 138

# MACHINE STEP

- Comfortable and safe standing for longer periods of work thanks to the large platform.
- Non-slip, convenient ascent thanks to the large step.
- Extremely high stability for heavy-duty use.
- Lightweight for ergonomic positioning.

## Features:

- Platform dimensions 580 x 350 mm.

EN  
14183

Max.  
150 kg



10  
YEAR  
GUARANTEE

★ ★ ★  
MADE IN  
GERMANY



Number of steps incl. platform	1	2	3	4	5
Standing height (approx. m)	0.20	0.40	0.60	0.80	1.00
Reach height (approx. m)	2.20	2.40	2.60	2.80	3.00
Overhang (approx. m)	0.38	0.63	0.87	1.10	1.34
Width (approx. mm)	600	680	700	730	760
Weight (approx. kg)	2.8	5.6	7.9	10.4	14.6
Order no.	6878163	6878263	6878363	6878463	6878563

## Recommended accessories:



Holding device  
lateral  
Page 137



Holding device  
frontal  
Page 137



Castors set  
Page 138

# MACHINE STEP R13

- Work safety in the highest slip resistance class R13. Suitable for use in oily areas.
- Comfortable and safe standing for longer periods of work thanks to the large platform.
- Non-slip, convenient ascent thanks to the large step.
- Extremely high stability for heavy-duty use.
- Lightweight for ergonomic positioning..

## Features:

- Aluminium perforated plate R13.
- Platform dimensions 580 x 350 mm.

EN  
14183



Max.  
150 kg

10  
YEAR  
GUARANTEE



Number of steps incl. platform	1	2	3	4	5
Standing height (approx. m)	0.20	0.40	0.60	0.80	1.00
Reach height (approx. m)	2.20	2.40	2.60	2.80	3.00
Overhang (approx. m)	0.38	0.63	0.87	1.10	1.34
Width (approx. mm)	600	680	700	730	760
Weight (approx. kg)	2.8	5.6	7.9	10.4	14.6
Order no.	6878164	6878264	6878364	6878464	6878564

## Recommended accessories:



Holding device  
lateral  
Page 137



Holding device  
frontal  
Page 137



Castors set  
Page 138

# STEP STAND

EN  
14183

**10**  
YEAR  
GUARANTEE

★ ★ ★  
MADE IN  
GERMANY

- Comfortable and safe standing for longer periods of work thanks to the large platform.
- Non-slip, convenient ascent thanks to the large step.
- Extremely high stability for heavy-duty use.
- Shipped with 2 castors incl. fastening material for self-assembly by using tools.
- Optional: Ergonomically shaped handrails on both sides.

## Features:

- **Step depth 250 mm (aluminium profile steps).**
- **Step width optionally 600, 800 or 1,000 mm.**
- **Platform depth 400 mm.**
- **Permissible load steps 150 kg.**
- **Permissible load platform 300 kg.**



68840603



hymer-configurator.com

Step width (mm)	600				800				1,000			
Number of steps incl. platform	2	3	4	5	2	3	4	5	2	3	4	5
Standing height (height of platform) (approx. m)	0.40	0.60	0.80	0.99	0.40	0.60	0.80	0.99	0.40	0.60	0.80	0.99
Reach height (approx. m)	2.40	2.60	2.80	2.99	2.40	2.60	2.80	2.99	2.40	2.60	2.80	2.99
Overhang (approx. m)	1.02	1.22	1.42	1.61	1.02	1.22	1.42	1.61	1.02	1.22	1.42	1.61
Weight (approx. kg)	34.4	40.6	48.6	55.1	38.0	45.2	54.2	61.5	41.8	49.7	59.8	68.0
Order no.	68840602	68840603	68840604	68840605	68840802	68840803	68840804	68840805	68841002	68841003	68841004	68841005

External step width: Step width +155 mm for single-sided railing, step width +230 mm for double-sided railing.

## Recommended accessories:



Platform railing lateral  
Page 138



Platform railing frontal  
Page 138



Handrail, usable on both sides  
Page 138




Clamping lever / Guardrail bracket with clamping lever  
Page 137

# INDUSTRIAL STEP

- Comfortable and safe standing for longer periods of work thanks to the large platform.
- Non-slip, convenient ascent thanks to the large step.
- Extremely high stability for heavy-duty use.
- Ideal for stationary installation.
- Can be combined in different assembly variants. Various step coverings available. See page 127.

## Features:

- Step depth 250 mm (aluminium profile steps).
- Step depth top step approx. 470 mm.

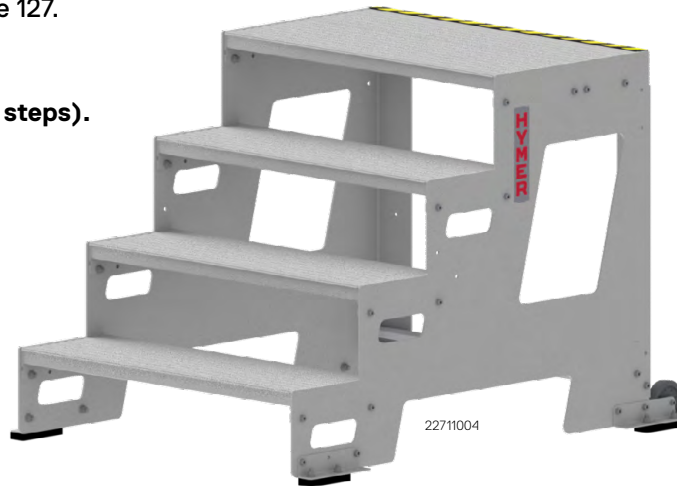

EN  
14183

Max.  
150 kg

10  
YEAR  
GUARANTEE

★ ★ ★  
MADE IN  
GERMANY



## Basic modules

Step width (mm)	600			800			1,000		
Number of steps	2	3	4	2	3	4	2	3	4
Standing height (height of top step) (approx. m)	0.4	0.6	0.8	0.4	0.6	0.8	0.4	0.6	0.8
Reach height (approx. m)	2.4	2.6	2.8	2.4	2.6	2.8	2.4	2.6	2.8
Overhang (approx. m)	0.78	1.05	1.25	0.78	1.05	1.25	0.78	1.05	1.25
Weight (approx. kg)	16.4	22.9	30.2	18.6	25.9	33.9	20.8	29.0	37.9
Order no.	22710602	22710603	22710604	22710802	22710803	22710804	22711002	22711003	22711004

## Extension modules


Step width (mm)	600			800			1,000		
Number of steps	2	3	4	2	3	4	2	3	4
Weight (approx. kg)	13.2	17.6	22.5	15.0	20.3	26.4	17.1	23.3	29.7
Order no.	22720602	22720603	22720604	22720802	22720803	22720804	22721002	22721003	22721004

## Recommended accessories:



Holding device  
Page 137

## Examples of assembly configurations:



### Possible combination:

2 industrial steps with 4 steps + 2 holding devices

Order no.	Description	Quantity
22710604 or 22710804 or 22711004	Industrial step, basic module with 4 steps	2 pieces
22730004	Holding device for industrial step with 4 steps	2 pieces




### Possible combination:

1 industrial step with 4 steps + 2 extensions with 4 steps + 2 holding devices

Order no.	Description	Quantity
22710604 or 22710804 or 22711004	Industrial step, basic module with 4 steps	1 piece
22720604 or 22720804 or 22721004	Industrial step, extension module with 4 steps	2 pieces
22730004	Holding device for industrial step with 4 steps	2 pieces

## Available as steel or aluminium grating on request:




### Aluminium, grooved,

#### Anti-slip property class R11

Use with low requirements for anti-slip properties (DIN 51130)

For dry indoor areas




### Steel grating, galvanised

#### Anti-slip property class R12

Use with high requirements for anti-slip properties (DIN 51130)

For contaminated areas, also with liquids (no oils)




### Aluminium grating

#### Anti-slip property class R13

Use with high requirements for anti-slip properties (DIN 51130)

For contaminated areas, also with liquids and oils




### Steel grating, galvanised

#### Anti-slip property class R13

Use with high requirements for anti-slip properties (DIN 51130)

For contaminated areas, also with liquids and oils



### Perforated steel, galvanised

#### Anti-slip property class R13

Use with high requirements for anti-slip properties (DIN 51130)

For contaminated areas, also with liquids and oils

# SERVICING AND ASSEMBLY STEP

EN  
14183

Max.  
150 kg



- Ergonomic working on 80 mm step depth.
- Stable platform with a large standing surface.
- High stability provided by welded stile-rung connection.
- Rigid braces prevent accidental folding.
- Requires little space to transport and store.

## Features:

- Platform dimensions 400 x 300 mm.
- Legal warranty.



7102003

Number of steps incl. platform	2	3	4
Stile (approx. mm)	80	80	80
Standing height (approx. m)	0.42	0.62	0.84
Reach height (approx. m)	2.42	2.62	2.84
Vertical height (approx. m)	0.42	0.62	0.84
Width top/bottom (approx. mm)	400/530	400/560	400/600
Folded L x W x H (approx. m)	0.69x0.53x0.17	0.91x0.55x0.17	1.13x0.60x0.17
Base width (approx. m)	0.58	0.72	0.88
Platform size (approx. m)	0.40x0.30	0.40x0.30	0.40x0.30
Weight (approx. kg)	4.0	4.7	5.6
Order no.	7102002	7102003	7102004



# SAFETY STEP WITHOUT HANDRAIL

- Extremely stable, folding safety step.
- Extra-large steps with non-slip rubber coating.
- High tensile and pressure-resistant bracing between ladder and support section.

## Features:

- Step width 360 mm.
- Step depth 230 mm.
- Legal warranty.

EN  
14183

Max.  
150 kg



★ ★ ★  
MADE IN  
GERMANY



606003

	2	3
Number of steps	2	3
Standing height (height of top step) (approx. m)	0.45	0.70
Reach height (approx. m)	2.45	2.70
Width (approx. mm)	490	560
Folded L x W x H (approx. m)	0.55x0.49x0.08	1.12x0.56x0.08
Base width (approx. m)	0.55	0.90
Weight (approx. kg)	5.0	8,4
Order no.	606002	606003

## Recommended accessories:



Set of spring-  
loaded castors  
Page 138

# SAFETY STEP WITH HANDRAIL

- Extremely stable, folding safety step.
- Extra-large steps with non-slip rubber coating.
- High tensile and pressure-resistant bracing between ladder and support section.
- With bracket and practical tool tray.

## Features:

- Step width 360 mm.
- Step depth 230 mm.
- Legal warranty.



EN  
14183

Max.  
150 kg



★ ★ ★  
MADE IN  
GERMANY

Number of steps	3	4	5
Standing height (height of top step) (approx. m)	0.70	0.90	1.15
Reach height (approx. m)	2.70	2.90	3.15
Width (approx. mm)	560	580	600
Folded L x W x H (approx. m)	1.12x0.56x0.12	1.43x0.58x0.12	1.75x0.60x0.12
Base width (approx. m)	0.90	1.15	1.50
Weight (approx. kg)	8.4	10.6	12.8
Order no.	606103	606104	606105

## Recommended accessories:



Set of spring-  
loaded castors  
Page 138

# SAFETY STEP WITHOUT HANDRAIL

- Extremely stable, folding safety step.
- Extra-large steps with ribbed aluminium surface.
- High tensile and pressure-resistant bracing between ladder and support section.

## Features:

- Step width 360 mm.
- Step depth 230 mm.
- Legal warranty.

EN  
14183

Max.  
150 kg



★ ★ ★  
MADE IN  
GERMANY



606203

Number of steps	2	3
Standing height (height of top step) (approx. m)	0.45	0.70
Reach height (approx. m)	2.45	2.70
Width (approx. mm)	490	560
Folded L x W x H (approx. m)	0.55x0.49x0.08	1.12x0.56x0.08
Base width (approx. m)	0.55	0.90
Weight (approx. kg)	4.7	6.6
Order no.	606202	606203

## Recommended accessories:



Set of spring-  
loaded castors  
Page 138

# SAFETY STEP WITH HANDRAIL

- Extremely stable, folding safety step.
- Extra-large steps with ribbed aluminium surface.
- High tensile and pressure-resistant bracing between ladder and support section.
- With bracket and practical tool tray.

## Features:

- Step width 360 mm.
- Step depth 230 mm.
- Legal warranty.



EN  
14183

Max.  
150 kg



★ ★ ★  
MADE IN  
GERMANY

Number of steps	3	4	5
Standing height (height of top step) (approx. m)	0.70	0.90	1.15
Reach height (approx. m)	2.70	2.90	3.15
Width (approx. mm)	560	580	600
Folded L x W x H (approx. m)	1.12x0.56x0.12	1.43x0.58x0.12	1.75x0.60x0.12
Base width (approx. m)	0.90	1.15	1.50
Weight (approx. kg)	9.7	11.9	14.4
Order no.	606303	606304	606305

## Recommended accessories:



Set of spring-  
loaded castors  
Page 138

# TELESCOPIC ALUMINIUM PLANK

- Solid, welded design.
- Infinitely extendable on both sides.

## Features:

- Plank width 270 mm.
- Legal warranty.

Max.  
150 kg




686601



Length (approx. m)	1.79 – 2.90	2.08 – 3.50
Pack size L x W x H (approx. m)	1.79x0.31x0.09	2.08x0.31x0.09
Weight (approx. kg)	12.2	13.9
Order no.	686601	686602

Note: Maximum permissible standing height 1.00 m.

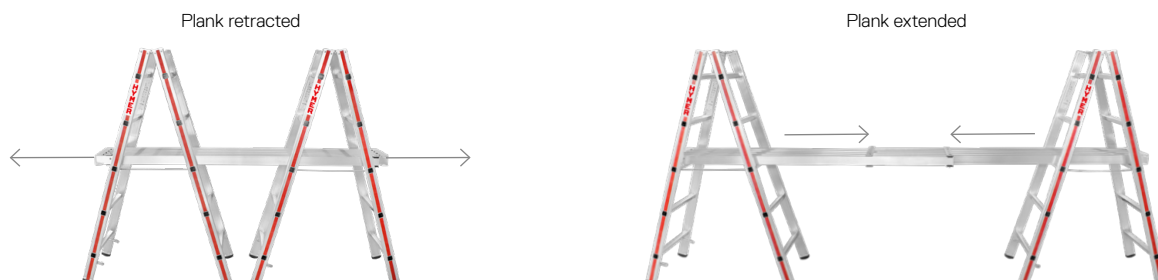

# 'TELESTEG' ALUMINIUM PLANK

- Lockable transport securing device.
- Quick and easy connection of the individual elements.
- Extremely high stability for heavy-duty use.
- Infinitely extendable on both sides and can be separated in the middle.
- Requires little space to transport and store.


**Features:**

- Plank width 300 mm.

Max.  
150 kg  
↓

**10**  
YEAR  
GUARANTEE

★ ★ ★  
MADE IN  
GERMANY

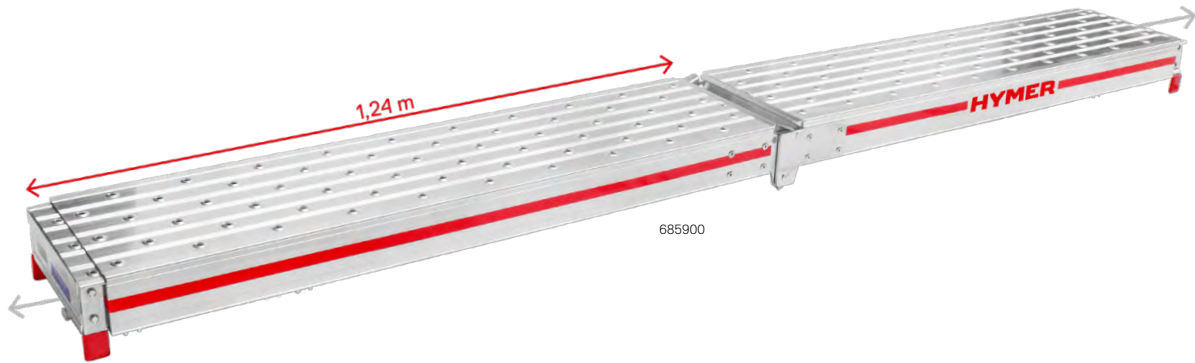

<b>Length extended</b> both sections (approx. m)	4.00
<b>Length extended</b> one section (approx. m)	2.00
<b>Length retracted</b> one section (approx. m)	1.24
<b>Pack size</b> L x W x H (approx. m)	1.25x0.30x0.20
<b>Weight</b> (approx. kg)	22.4
<b>Order no.</b>	685900

Note: Maximum permissible standing height 1.00 m.



6864

# ASSEMBLY STAND

- Supports lock automatically when in the working and transport position.
- Easy to transport thanks to the grip hole in the middle of the tread.
- Extremely high stability for heavy-duty use.
- Requires little space to transport and store.

## Features:

- **Screw-in ladder feet.**
- **Platform width 0.50 m.**
- **Platform length 1.70 m.**

Max.  
300 kg

**10**  
YEAR  
GUARANTEE

★ ★ ★  
MADE IN  
GERMANY



Platform length (approx. m)	1.70
Platform width (approx. m)	0.50
Stile (approx. mm)	60
Standing height (approx. m)	0.58
Reach height (approx. m)	2.58
Pack size L × W × H (approx. m)	1.75 × 0.60 × 0.20
Weight (approx. kg)	16.9
Order no.	686400

## Recommended accessories:



Leg extension set  
Page 139

---

# ACCESSORIES AND SPARE PARTS FOR STEPS AND WORKING PLATFORMS

137 Accessories

139 Spare parts



# ACCESSORIES



## Holding device for aluminium step

- Can be mounted on the right, left or both sides.
- Self assembly by using tools.
- Including fastening material.

For type	6875
Weight (approx. kg)	1.2
Order no.	0054896



## Holding device for industrial step

- For safe and easy to climb.
- Self assembly by using tools.
- Including fastening material.

For type	2271	
For number of steps	3	4
For step width (mm)	600+800+1,000	600+800+1,000
Weight (approx. kg)	4,8	5,1
Order no.	22730003	22730004



## Holding device lateral for machine step

- For safe and easy to climb.
- Self assembly by using tools.
- Including fastening material.


For type	6878		
For number of steps	2+3	4	5
Height (approx. m)	0.60	0.60	0.60
Weight (approx. kg)	1.7	1.9	2.0
Order no.	20000962	20000963	20000964



## Holding device frontal for machine step

- For safe standing.
- Self assembly by using tools.
- Including fastening material.

For type	6878
For number of steps	2-5
Height (approx. m)	0.60
Weight (approx. kg)	1.9
Order no.	20000965



## Clamping lever for step stand

- For quick removal of the guardrail.
- Including fastening material.

For type	6884	
For number of steps	2-5	
Quantity (pieces)	1	2
Order no.	22990034	22990035



## Guardrail bracket with clamping lever for step stand

- For quick removal of the guardrail.
- Including fastening material.

For type	6884	
For number of steps	2-5	
Quantity (pieces)	2	3
Order no.	22990036	22990037

# ACCESSORIES



## Platform railing lateral for step stand, usable on both sides

- Including fastening material.
- Number of clamping levers required for removable platform railing: 2 pieces.

For type	6884
For number of steps	2-5
Weight (approx. kg)	6.4
Order no.	0054747



## Platform railing frontal for step stand

Including fastening material.

- Number of clamping levers required for removable platform railing: 2 pieces.

For type	6884		
For step width (mm)	600	800	1,000
Weight (approx. kg)	7.3	8.2	9.0
Order no.	22990030	22990031	22990032



## Handrail for step stand, usable on both sides

- Including fastening material.
- Number of clamping levers required for removable handrail: 2 pieces.

For type	6884		
For number of steps	2+3	4	5
Weight (approx. kg)	7.1	7.4	8.5
Order no.	0055367	0055366	0053472



## Set of spring-loaded castors for safety steps

- Practical set of 4 rubber-covered, ball bearing-mounted swivel castors.
- The compression spring ensures stability when climbing the step.
- Self assembly by using tools.
- Content: 4 castors incl. fastening material.

For type	6060+6061+6062+6063
For number of steps	3-5
Weight (approx. kg)	2.3
Order no.	008951



## Castors set for aluminium step

- Self assembly by using tools.
- Content: 2 castors incl. fastening material.

For type	6875
Weight (approx. kg)	0.9
Order no.	0054448



## Castors set for machine step

- Self assembly by using tools.
- Content: 2 castors and 2 holders incl. fastening material.

For type	6878
For number of steps	2-5
Weight (approx. kg)	1.1
Order no.	20000966

## ACCESSORIES / SPARE PARTS



### Leg extension set for assembly stand

- Stile extensions for infinite height adjustment of assembly stand from 0.58 m to 0.83 m.
- Reach height with extensions 2.58 m to 2.83 m.
- Infinitely adjustable.
- Self assembly, no tools required.
- Content: 2 extensions incl. mastening material.

For type	6864
For stile size (approx. mm)	60
Adjustment range (approx. mm)	250
Weight (approx. kg)	1.5
Order no.	0051856



## SPARE PARTS



### Spare parts set ball caps for stabilisers for platform ladders / spare parts set ball caps for machine step

- Self assembly, no tools required.
- Content: 2 caps

For type	6878
Cap diameter (approx. mm)	30
Weight (approx. kg)	0.1
Order no.	0054760



### Ladder feet set for safety steps

- Self assembly, no tools required.
- Content: 2 feet for support section and 2 feet for ladder section.

For type	6060+6062	6060+6061 +6062+6063
For number of steps	2	3-5
Weight (approx. kg)	0.1	0.1
Order no.	0054975	0054635



### Spare parts set tool tray for safety steps

- Self assembly by using tools.
- Content: 1 tool tray incl. fastening material.

For type	6061+6063
Weight (approx. kg)	0.3
Order no.	0054829



# SPARE PARTS



## Rubber coating for safety steps

- Self assembly, no tools required.

For type	6060+6061
Weight (approx. kg)	0.3
Order no.	0054830



## Plastic support plate

- Non-slip for greater stability.
- Floor bracket not included in the price.

For type	2271+6884
Order no.	20000661



## Spring for hook locking for 'TELESTEG' aluminium plank

- Self assembly by using tools.


For type	6859
Order no.	003412



## Spring for safety device for telescopic rail for 'TELESTEG' aluminium plank

- Self assembly by using tools.

For type	6859
Order no.	003433



## Spare parts set cotter pins for 'TELESTEG' aluminium plank

- Self assembly, no tools required.
- Content: 2 safety cotter pins.

For type	6859
Order no.	0053500



# HYMER-ACCESS TECHNOLOGY




## LADDERS AND STEPS

- Leaning and hookable ladders
- Extension and rope-operated extension ladders
- Step ladders
- Multipurpose ladders
- Platform ladders and stockers' ladders
- Products for special applications
- Steps and working platforms



## MOBILE TOWERS

- Mobile towers with stairway
- Different platform sizes
- Optionally with mobile cross-beams / stabilisers

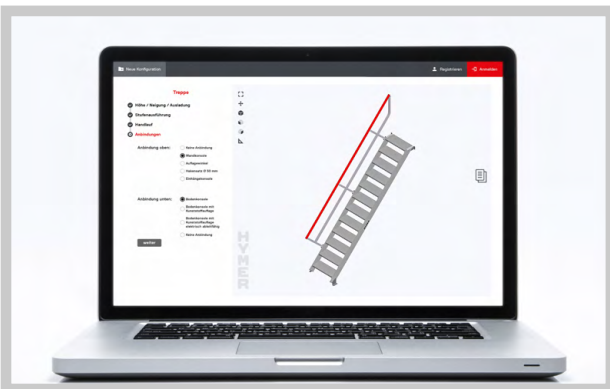

## STAIRS, PLATFORMS, MAINTENANCE PLATFORMS

- HYMER configurations
- Special designs
- Online configurator: [hymer-configurator.com](http://hymer-configurator.com)



## VERTICAL LADDERS


- Ladder for building maintenance
- Escape ladder / fire escape ladder / escape route
- Maintenance ladder for machine systems
- Online configurator: [hymer-configurator.com](http://hymer-configurator.com)

# BASED IN THE ALLGÄU, LOCATIONS THROUGHOUT EUROPE.

60 years of excellent quality made in Germany.

Under the leadership of our founding family since day one, we are successful on the market as a stable company active throughout Europe. Because we don't settle for mediocrity, but constantly

question and re-define the accepted standards. This is how we create both stability and progress.

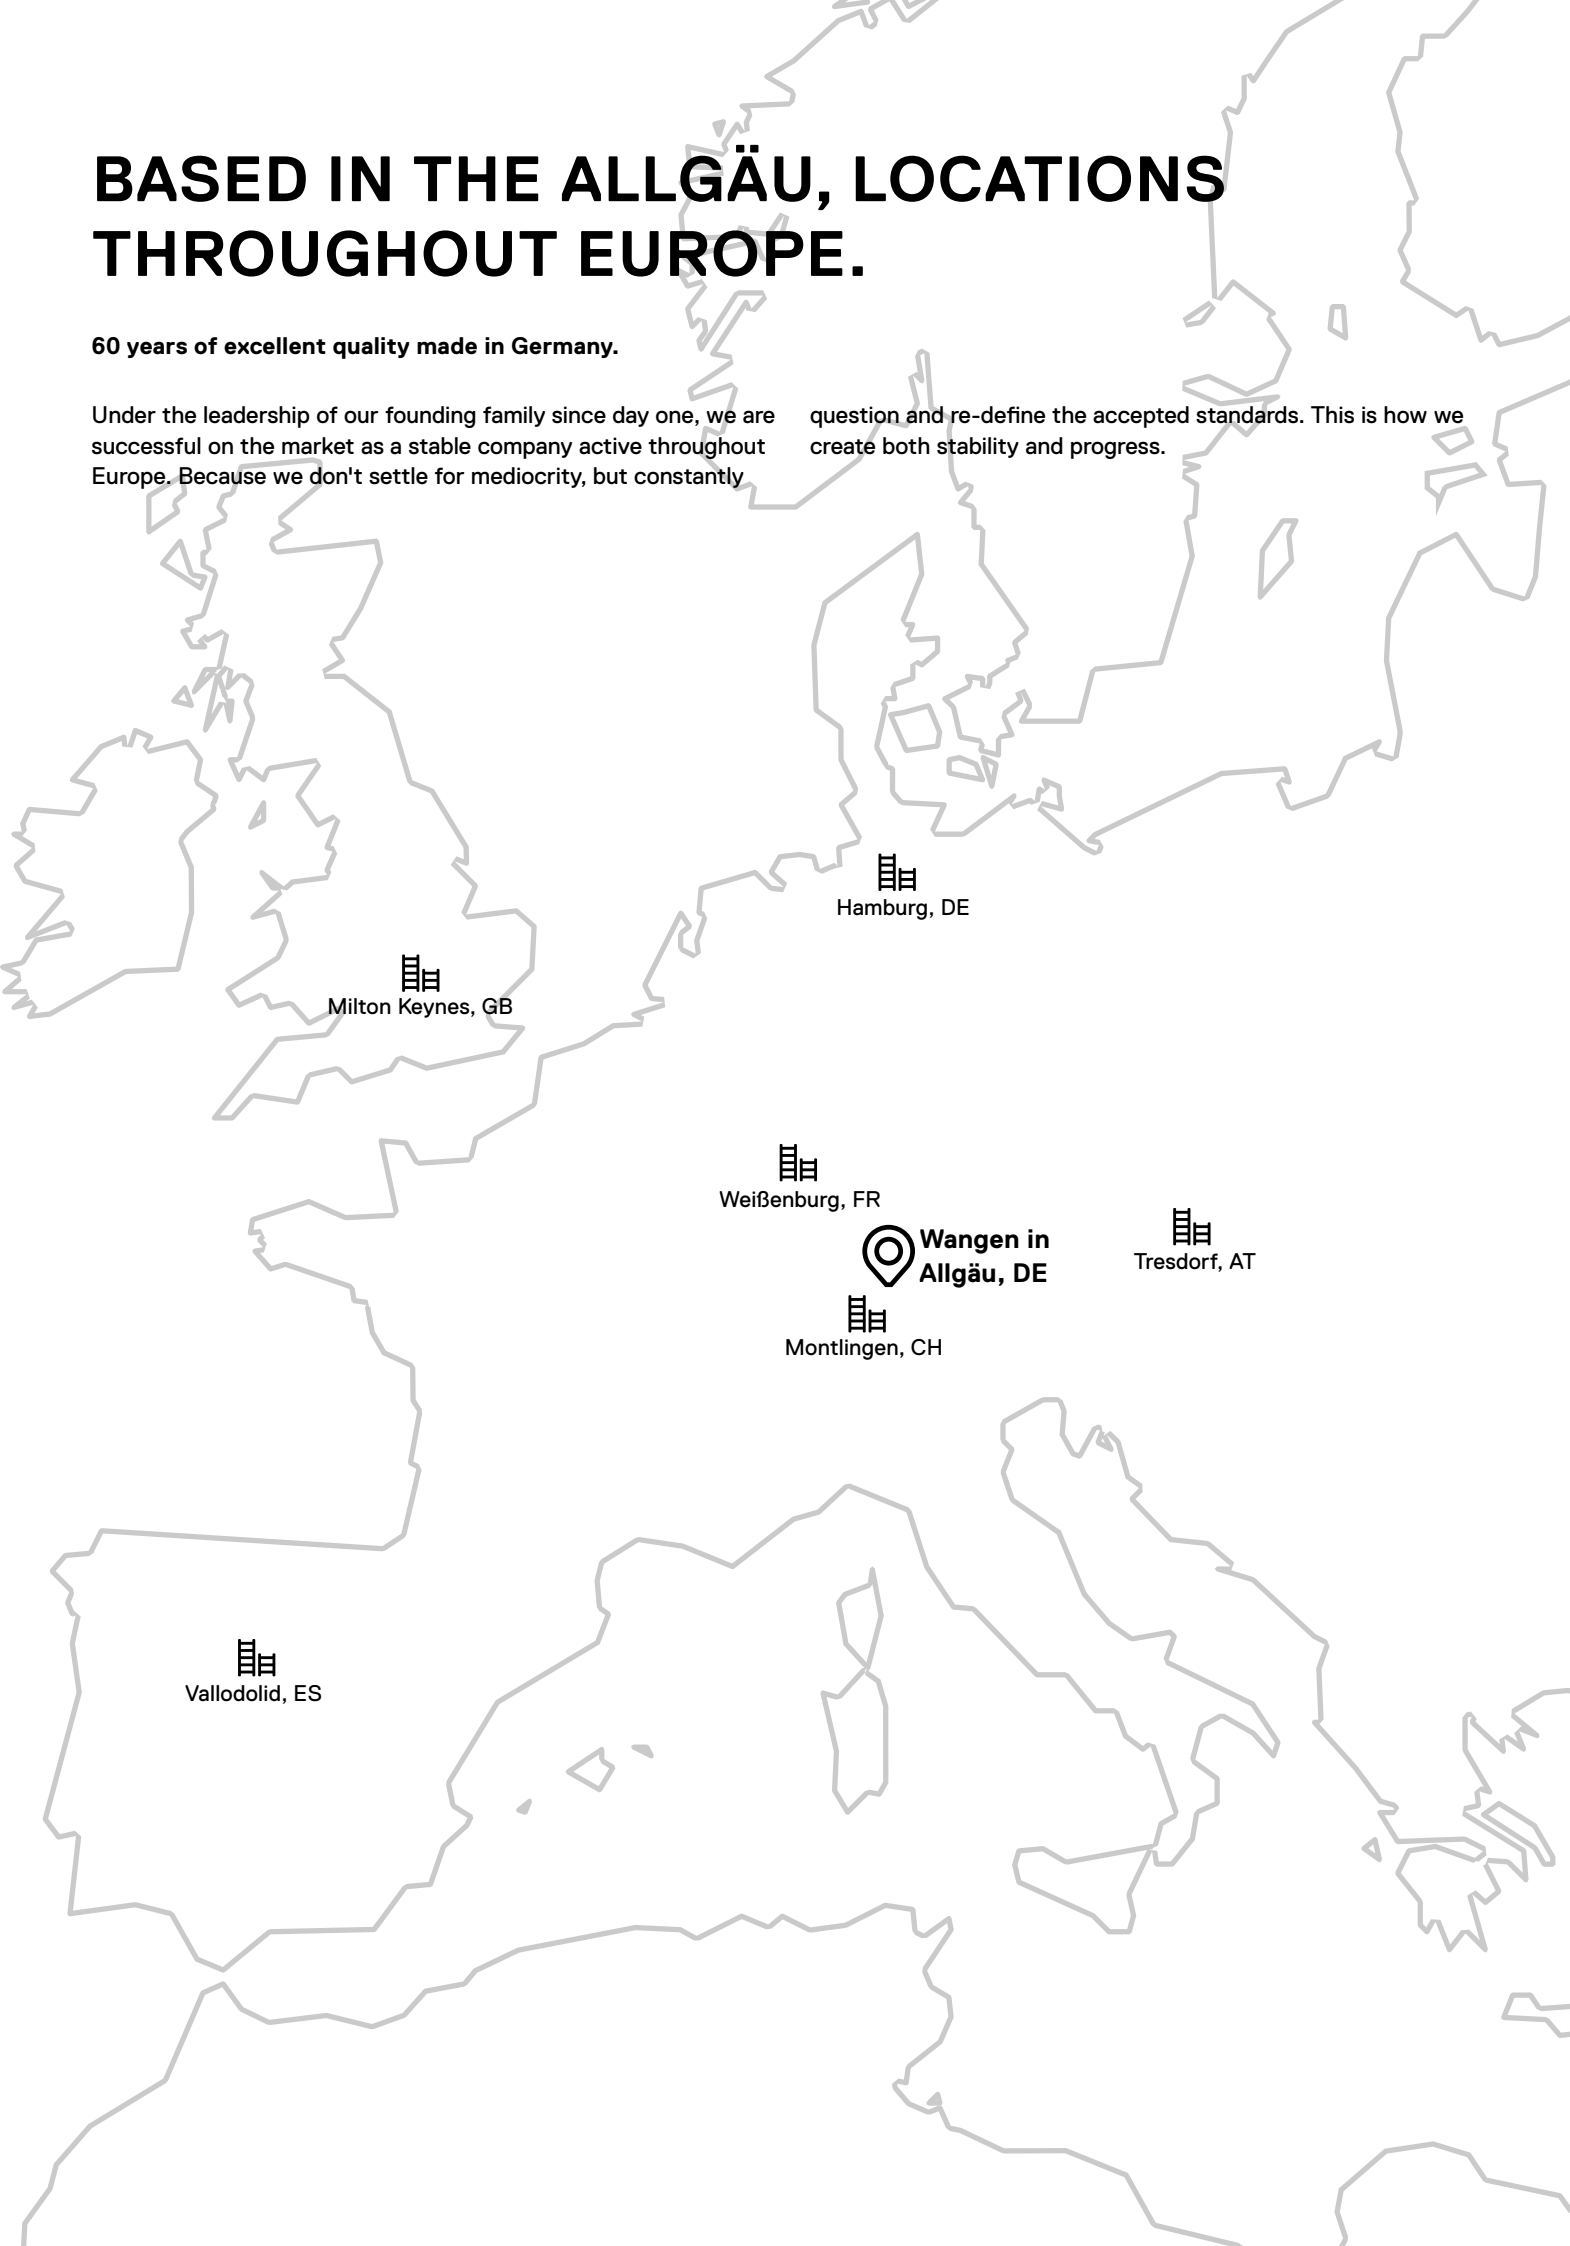

  
Milton Keynes, GB

  
Hamburg, DE

  
Weissenburg, FR

 Wangen in  
Allgäu, DE

  
Tresdorf, AT

  
Montlingen, CH

  
Vallodolid, ES



# Hymer-Leichtmetallbau GmbH & Co. KG

Käferhofen 10 | 88239 Wangen | Germany

Telephone +49 75 22 700-700

international-sales@hymer-alu.de | [hymer-access.com](https://hymer-access.com)

## hymer-access.com

You can also download all  
brochures from our website:



Written information on the products and images thereof may differ from the actual design in individual cases.  
Errors, price changes and design modifications are also reserved.

Version: 01/2024