



## FUELLING LADDER

The ideal platform for your maintenance, refuelling, de-icing and repair work. Individually height-adjustable, easy to move and extremely robust!



### Cost-effective

The platform can be used all year round for activities such as maintenance, refuelling, de-icing and repair work.



### Extendable

Thanks to the integrated rope winch, the height of the platform can be easily and quickly adjusted (adjustment range 1,330 mm).



### Flexible

Choose between different castor sizes and basket variants.



### Safe

The spacious platform (1,000 x 600 mm) with three-sided guardrail offers maximum comfort and safety at any height.



### Intelligent

The self-closing barrier secures the working area and prevents persons accidentally slipping off the platform.



### Convenient

Convenient ascent thanks to an inner ladder width of approx. 700 mm and continuous handrail.



### Mobile

With four castors; two of which are swivel castors and two are fixed castors for convenient movement of the platform. The castor diameter can be freely selected.



### Practical


Shipped in pre-assembled modules. On request, we will be happy to carry out the final assembly for you.

# FUELLING LADDER

**HYMER**

The ideal platform for your maintenance, refuelling, de-icing and repair work. Individually height-adjustable, easy to move and extremely robust!

Your HYMER contact:  
Tel. +49 (0) 7522 700-702  
technical-sales@hymer-alu.de


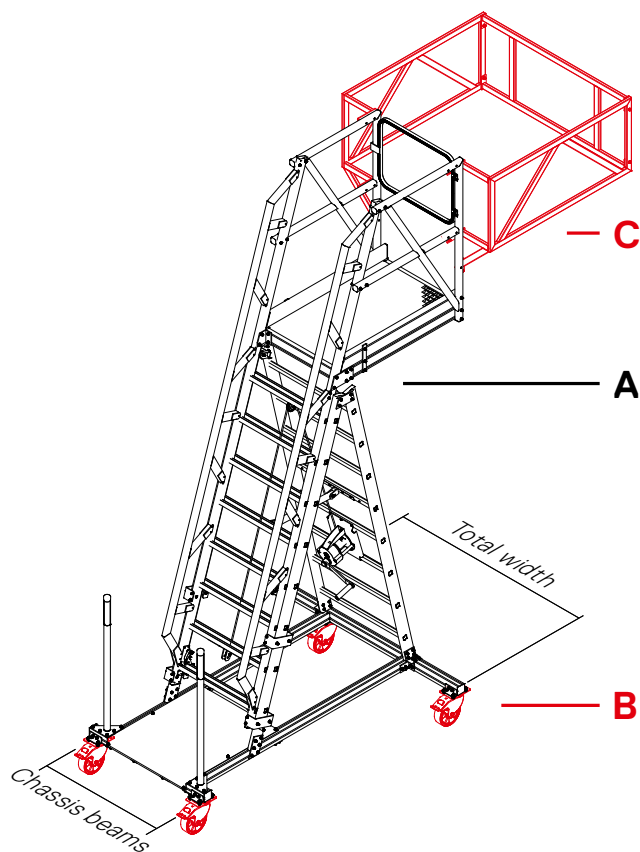


## A Basic ladder module

min. total height	3.79 m <sup>1)</sup> /3.83 m <sup>2)</sup>
max. total height	5.12 m <sup>1)</sup> /5.16 m <sup>2)</sup>
min. total length*	2.42 m
max. total length*	2.87 m
Total width	1.59 m
min. platform height	2.66 m <sup>1)</sup> /2.70 m <sup>2)</sup>
max. platform height	3.99 m <sup>1)</sup> /4.03 m <sup>2)</sup>
Platform length	1,000 mm
Platform width	600 mm
Guardrail height	1,100 mm
Rope winch tensile load with gear ratio	300 kg
Chassis beams	1.00 m
Chassis length	2.20 m
Permissible load	150 kg
Dead weight without basket	283 kg
<b>Product code</b>	<b>228001</b>

<sup>1)</sup> with 160 mm castor diameter  
<sup>2)</sup> with 200 mm castor diameter




\* without basket



## B Mandatory module for castors

	small	large
Diameter of castors	Ø 160 mm	Ø 200 mm
Content of the set	2 fixed castors and 2 swivel castors <sup>3)</sup>	2 fixed castors and 2 swivel castors <sup>3)</sup>
<b>Product code</b>	<b>0055221</b>	<b>0055222</b>

<sup>3)</sup> Swivel castors with StopFix (brake)



## C Optional basket module

	round	small	large
Protection cage dimensions	Ø 1,300 mm	1,260 × 1,190 mm	2,500 × 1,190 mm
<b>Product code</b>	<b>0055232</b>	<b>0055212</b>	<b>0055213</b>

Prices on request

hymer-steigtechnik.de

Written information about the products and their images may differ from the actual version in individual cases. Errors excepted; price and design are subject to change. - As of: 07/2021